



DIRECTIONALS



3730 SERIES Surface Mount

This compact and versatile surface-mount LED directional light is ideal for applications requiring high intensity output, low current draw and maintenance-free operation. Premium LED heads feature a clear acrylic lens optic with LEDs that illuminate in the colour of your choice. Warning capability can be customised by selecting from 14 flash patterns (via a trigger wire) and synchronising multiple heads simultaneously or alternately. The coated aluminium base and urethane-sealed electronics protect the unit against the environment, making this one of the most rugged LED products available.

Models


PART NO.	VOLTAGE	AMPS	MOUNT
3730X	12-24	0.3	Surface

Replace X in part number with desired LED colour: A = amber, B = blue, C = clear, G = green, R = red

Features and Benefits

- Rugged die-cast coated aluminium housing with urethane-encapsulated electronics
- 14 flash patterns, including three integral alternating flash modes
- Discrete units are colourless when not illuminated
- Multiple units can be synchronised
- Temperature Range: -30°C to +50°C

Dimensions

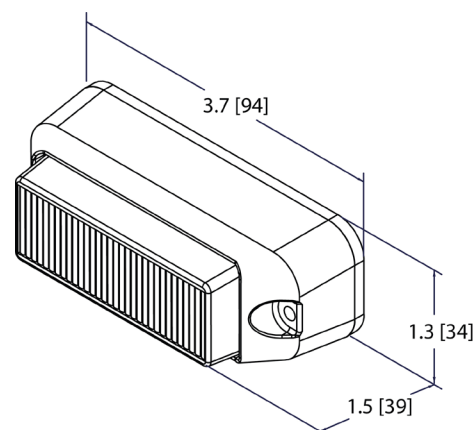

Flash Patterns (14)

- Steady Burn
- Single
- Fast Single
- Double
- Triple
- Quad
- Quint Hold
- Fast Double
- Constant Pulse8
- Pulse8
- Double Alternate
- Quad Alternate
- Quint Hold Alternate
- Random