

Technical Specification

REF: PST3

ISS: 1

Key Features

- Wired or SuperSeal Connections
- 12 or 24 volt operation
- Cost Effective LED Lighting
- Popular 95mm Package
- Choice of Lens Style

Technical Specification

Functions: Stop/Tail

Homologation: ECE

Voltage: 12v | 24v

Power Consumption: Stop (12v) 3.79w, (24v) 3.78w
Tail (12v) 0.33w, (24v) 3.36w

Connection: Cable 150mm or SuperSeal

Fixing: M4 Bolt

IP Rating: IP67

Material: Lens – PMMA | Housing – ABS/Polycarbonate

Temperature Range: -40°C to +50°C

Part Numbers

SL9LED12v – Stop/Tail LED 12 Volt Wired

SL9LED24v – Stop/Tail LED 24 Volt Wired

SL9LEDSS12V – Stop/Tail LED 12 Volt with SuperSeal

SL9LEDSS24V – Stop/Tail LED 24 Volt with SuperSeal

SL9LED12V - CLR – Stop/Tail LED 12 Volt with Clear Lens

SL9LED24V - CLR – Stop/Tail LED 24 Volt with Clear Lens

See Also

95mm LED Fog | Reverse | Indicator | 95mm Plinth

95mm LED Stop/Tail




Overview

95mm LED is a direct replacement for a 95mm bulb lamp, available as: Stop/Tail, Rear Fog, Reverse, Front Direction Indicator Rear Direction Indicator.

Supplied in a popular 95mm package, available with a choice of lens styles and a wired or SuperSeal option.

Drawing

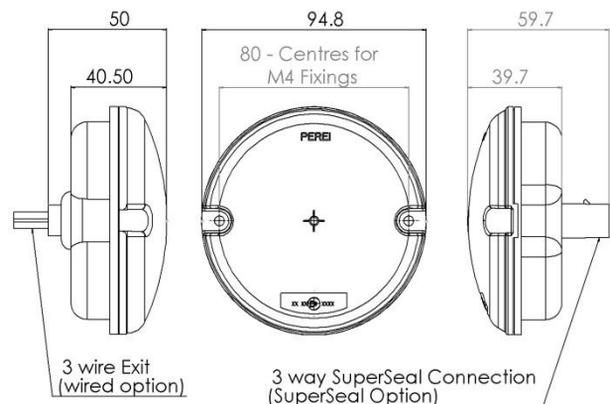

www.perei.co.uk | sales@perei.co.uk | +44 (0) 1842 812290

Perei Group Limited | Keystone Innovation Centre | Thetford | Norfolk | IP24 1JD | United Kingdom

Specifications herein are subject to change without notice

PEREI