

1.	CERTIFI Note: Ui P C b
11. 12.	DISPLAY: RESOLUT COLOR S VOLTAG VOLTAG POWER (TEMPERA CONNEC RECOMM PRODUC AUDIO: N
13. 14.	DAY/NIG WIRELESS




2.9 73

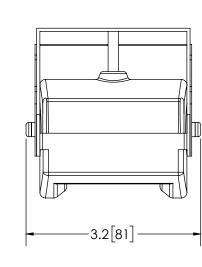

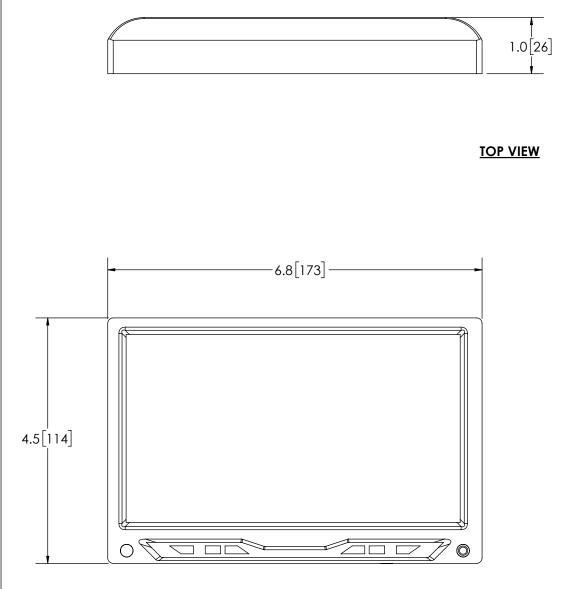

2.0 50

NON DISCLOSURE AGREEMENT THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS CO. AND IS ISSUED IN CONFIDENCE FOR NCINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED. COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR A A WHOLE TO OUTSDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WITTEN CONSENT OF ELECTRONIC CONTROLS CO. JBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2017 ELECTRONIC CONTROLS CO



NOTES: 1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

	REVISION HISTORY				
REV.	DESCRIPTION	DATE			
03	REVISED PER EC4713	2018-01-05			
04	REVISED PER EC4713	2018-01-17			
A	INITIAL RELEASE PER EC4713	2018-03-27			

SPECIFICATIONS

ICATIONS: **CE**; ROHS; Inique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration. 7 IN. TION: (PIXELS) SYSTEM: SE (NOMINAL): 12-24 VDC SE (EXTREME): 10-32 VDC (NOMINAL): 5W (@ 12 VDC NOMINAL) ATURE RANGE: -4°F (-20°C) TO 158°F (70°C) CTION: MENDED MOUNTING: ADJUSTABLE BASE SUPPORT CT WEIGHT: 0.88 LBS (0.0 Kg) NO GHT SENSOR: YES S: NO

MONITOR SPECIFICATIONS

SPECIFICATIONS

1. CERTIFICATIONS: $(\epsilon;)$ IP69K; Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration. 2. LENS ANGLE: 120° 3. RESOLUTION: 725 X 488 (PIXELS) 4. 18 IR LEDs FOR NIGHT VISION (8-10M VISIBILITY) 5. VOLTAGE (NOMINAL): 12 VDC 6. VOLTAGE (EXTREME): 10-16 VDC 7. POWER (NOMINAL): 1W (@ 12 VDC NOMINAL) 8. TEMPERATURE RANGE: -22°F (-30°C) TO 158°F (70°C) 9. CONNECTION: 4 PIN CABLE 10. RECOMMENDED MOUNTING: UNIVERSAL BRACKET 11. PRODUCT WEIGHT: 0.6 LBS (0.0 Kg) 12. AUDIO: NO

CAMERA SPECIFICATIONS

	DATE	6	<u>s</u>			_		
	2018-01-17	B	×	EC	CCI	 ``	www.eccolin	k.com
	2018-01-18		$\boldsymbol{\times}$					
	2018-01-17			0) 635-5900	Europe +44 (0)		•	
	2018-03-09	CAI	N S'	YS,7"C(OLOR,M	7000B	,C2013B,TC	20-4B
	2018-02-22						PRODUCT SERIES:	
		К7000В						
		SIZE:	В	DWG. NC).	K700	K7000B	
ntrolled Use Latest Copy		SHEET	1 OF 1	Project: EC	4713	Date Cr	eated: 2017-11-28	A