Current draw (13.8V / 28V)

EU140 SERIES

autolamps®

Low-Profile Round Rear Lamps

| Part# | Description | EAN Code | |
|-----------------------|---|---------------|--|
| EU140STIM | Stop / Tail / Indicator, Blister Pack | 9335962014231 | |
| EU140TRM | Reverse / Tail / Supplementary Stop, Blister Pack | 9335962014248 | |
| EU140TFM | Fog / Tail / Supplementary Stop, Blister Pack | 9335962014255 | |
| Voltage | 9-32V | | |
| Dimensions | Ø140 x 20mm | | |
| IP rating | IP67 | | |
| Warranty | 5 Years | | |
| Cable | Standard: 400mm (stripped-end) | | |
| Operating temperature | -30°C to +50°C | | |

| ECE approval | EU140STIM Tail (R7) - R1-E9-02.11171 Stop (R7) - S1-E9-02.11171 Ind. (R6) - 2a-E9-01.11171 | EU140TRM Tail (R7) - R1-E9-02.11318 Rev. (R23) - AR-E9-00.11318 | EU140TFM Tail (R7) - R1-E9-02.11172 Fog (R38) - F1-E9-00.11172 |
|---------------------|---|--|---|
| Wiring colour codes | BROWN: Tail [+] | YELLOW: Indicator [+] | BLACK: Reverse [+] |

Stop: 0.54A / 0.17A, **Tail:** 0.08A / 0.06A, **Indicator:** 0.77A / 0.16A,

| Mounting instructions | ▲ Installation to be undertaken by a competent professional |
|-----------------------|---|
| | CLICK & STICK EASY MOUNTING SYSTEM |
| | Ensure mounting surface is flat, clean and dry prior to installation. |

Fog: 0.38A / 0.24A, Reverse: 0.39A / 0.23A

2. Drill a minimum 12mm hole for the cable in between the two plug holes


BLUE: Fog [+]


3. Peel off paper protector for the 3M[™] tape

4. Push lamp firmly into hole

RED: Stop [+]

5. The lamp is held in place by the plug serrations and the 3M[™] tape

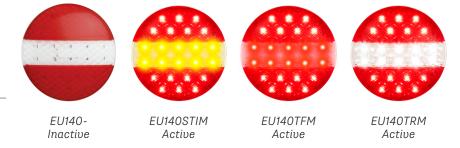

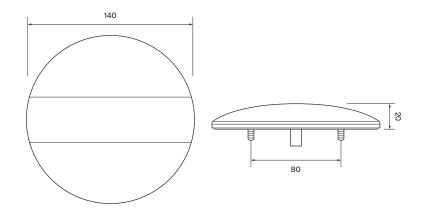

WHITE: Earth [-]