



 **RIGID**®

OWN THE NIGHT ™



## TABLE OF CONTENTS

3	Our Story
4	Manufacturing
5	Why RIGID
8	How to Navigate Catalog
11	Adapt
15	D-SS PRO
19	Radiance Curved
23	Radiance Plus
27	Radiance Pod
31	Rear Facing
37	Reflect
39	Ignite
43	Midnight Edition PRO
47	Capture
49	RDS-Series PRO
53	E-Series PRO
57	SR-Series PRO
61	D-Series PRO
65	D-XL PRO
69	Q-Series Pro
73	SR-Q PRO
77	SR-M PRO
81	A-Series
83	R-Series 46
87	R-Series 36
91	Scene Lights
95	Site Series
99	RI-Series
101	Headlight Kits
103	SAE Compliant
105	E-Mark Compliant
106	Amber Lights
107	MIL-STD-461F
108	Infrared
110	Lighting Kits
115	Grilles & OE Mounts
133	Accessories





**ADAPT**  
PG. 11



**E-SERIES PRO**  
PG. 53



**SR-SERIES PRO**  
PG. 57



**RDS-SERIES PRO**  
PG. 49



**IGNITE**  
PG. 39



**SR-M SERIES PRO**  
PG. 77



**SR-Q SERIES PRO**  
PG. 73



**D-SS PRO**  
PG. 15



**D-SERIES PRO**  
PG. 61



**D-XL PRO**  
PG. 65



**Q-SERIES PRO**  
PG. 69




**SITE SERIES**  
PG. 95



**CAPTURE**  
PG. 47



**SCENE LIGHTS**  
PG. 91

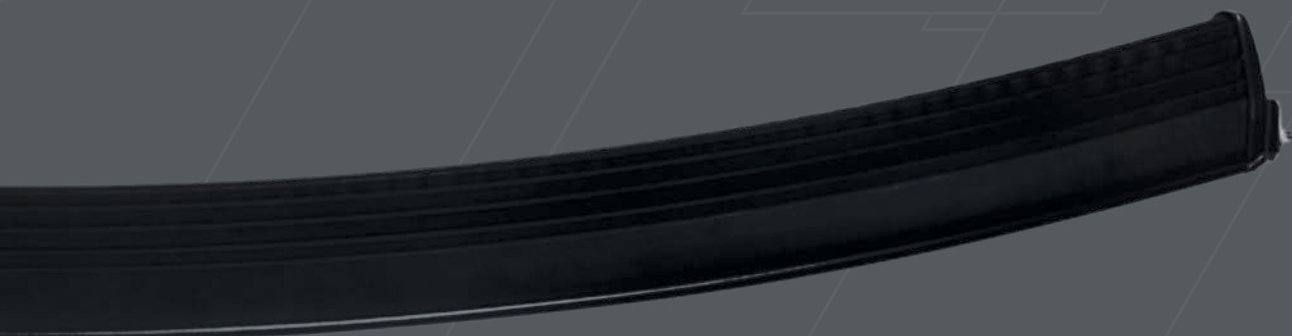

**HEADLIGHT KITS**  
PG. 101



**R-SERIES 46**  
PG. 83



**A-SERIES**  
PG. 81



**R-SERIES 36**  
PG. 87






**RADIANCE PLUS**  
PG. 23



**SAE COMPLIANT**  
PG. 103

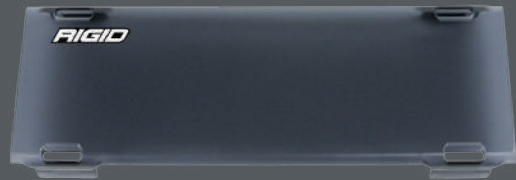

**ACCESSORIES**  
PG. 133



**RI-SERIES**  
PG. 99



**GRILLES & OE MOUNTS**  
PG. 117



**REFLECT**  
PG. 37




**INFRARED LIGHTS**  
PG. 108



**CHASE**  
PG. 31



**MIDNIGHT EDITION PRO**  
PG. 43

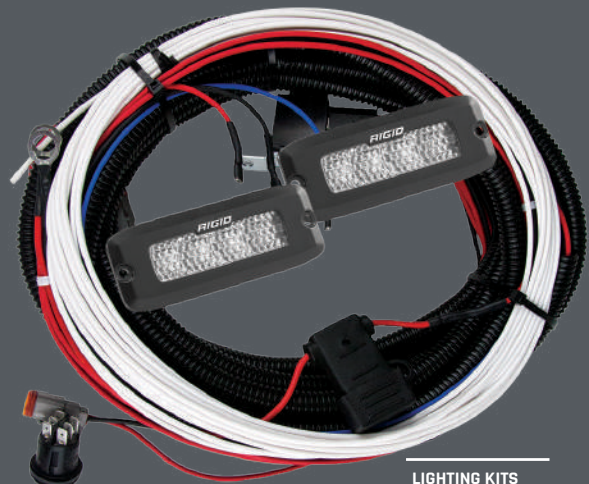

**LIGHTING KITS**  
PG. 109

# RIGID INGENUITY

## OUR STORY

In 2006, Rigid Industries LED Lighting introduced the E-Series LED Light Bar, the first of its kind in the LED lighting industry. Since then, RIGID has led the forward projecting LED lighting industry in innovation, light output and efficiency. Up until that time, the industry had focused on traditional incandescent light for racing and recreational applications, but the advanced LED lighting technology, combined with the patented Hybrid, Specter, and Hyperspot optics that offered more lighting at a fraction of the power consumption quickly revolutionized lighting in the off-road industry. Our patented optic systems effectively control the beam of light emitted by the LED, which translates to more light where you want it with very little wasted spill light. Since the introduction of our first product, our design and engineering teams are constantly developing new and innovative quality products using the latest in LED technology.

While RIGID started as an off-road lighting company, we quickly realized that our advanced lighting technologies could be applied to many other industries. RIGID currently produces lighting for the automotive, power sports, agriculture, marine, mining/construction, military, police and fire rescue industries, just to name a few. We take pride in the fact that our LED lighting products are designed, engineered, and assembled in the USA. This not only builds our local economy, but it also allows RIGID to maintain the high level of quality that you've come to expect from RIGID products. This level of refinement and quality control is what separates RIGID from the rest.

In 2015 RIGID announced its acquisition by Truck-Lite®. Together, RIGID and Truck-Lite now offer the complete package of DOT, off-road and accessory LED lighting for not only on and off-road markets, but for markets from around the world in a wide variety of heavy-duty and commercial vehicle categories. RIGID and Truck-Lite take pride in the fact that our products are designed, engineered and assembled in the USA, employing over 2,400 people and counting. Both RIGID and Truck-Lite look forward to expanding our presence and products around the globe.



## MANUFACTURING

**RIGID** products are proudly designed, engineered, assembled and tested in our **ISO 9001:2008** facility in the United States. Currently, we have two locations in the greater Phoenix Metro area. Our highly skilled and motivated workforce takes pride in the fact that RIGID LED lighting products are built in the USA. This not only helps build our local economy, but allows us to remain hands-on, ensuring you will continue to receive the highest level of quality that you've come to expect from RIGID.


We go the distance by requiring extra testing and certifications for heavy-duty vibration, dust, moisture and corrosion resistance on our lights and brackets. This ensures that we have a product that we can stand behind, no matter the industry or application it is used for and we back all of our products with a Limited Lifetime Warranty. Quality workmanship, combined with innovative technologies allows us to produce the best forward projecting LED lights on the market.



# BUILD QUALITY

DON'T BE FOOLED BY OTHERS

## RIGID VS OTHERS

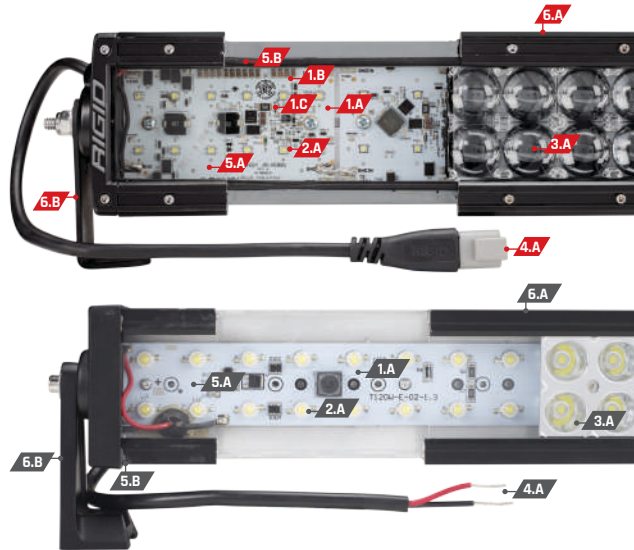

### 1. BOARDS

#### RIGID

##### 1.A

Aluminum PCB Smart Boards™

##### 1.B

Copper thermal conductive pad

##### 1.C

Gold plated electrical contacts

#### OTHERS

##### 1.A

Cost-cutting stock boards

### 2. LEDs

#### RIGID

##### 2.A

Hand selected brightest high-tech LEDs from the best LED manufacturers.

#### OTHERS

##### 2.A

Falsely claiming use of name brand LEDs (Cree), cheap, less advanced LEDs

### 3. OPTICS

#### RIGID

##### 3.A

RIGID invests heavily in optical science and has developed multiple patented optics that maximize the total light output and efficiency.

#### OTHERS

##### 3.A

Simple non-engineered reflector dishes that scatter the light.

### 4. CONNECTIONS

#### RIGID

##### 4.A

Waterproof connector mates with the supplied wiring harness.

#### OTHERS

##### 4.A

Blunt cut wires and no wiring harness, switch, or relay.

### 5. LENS & SEALS

#### RIGID

##### 5.A

Impact Resistant Polycarbonate Lens that will never yellow.

##### 5.B

Custom molded synthetic polymer gaskets create a 100% water/dustproof seal.

##### 5.C

GORE® Pressure Equalizing Vent. (not shown)

#### OTHERS

##### 5.A

Light diffusing glass or inferior plastics will quickly crack, scratch, and yellow.

##### 5.B

Hand-applied household silicone seal, no pressure vent.

### 6. COATING

#### RIGID

##### 6.A

6063-T5 aircraft aluminum extruded housings treated with Alodine® corrosion preventive and Tiger Drylac® UV protectant polyester powder coating.

##### 6.B

Corrosion-proof chrome-plated 304 stainless steel hardware.

#### OTHERS

##### 6.A

Thin-wall low-grade aluminum material with Single coat black paint that quickly fades when exposed to the sun.

##### 6.B

Zinc or non-coated hardware quickly corrodes under harsh environments or salt exposure.



# REAL COST OF OWNERSHIP

Exclusions May Apply

**RIGID**  
VS  
OTHERS = **REAL COST**  
\$\$\$\$\$



ORIGINAL  
LIGHT COST

\$\$\$\$  
VS  
\$\$



HARNESS,  
SWITCH & RELAY

INCLUDED  
VS  
+\$



WARRANTY

INCLUDED  
VS  
NONE  
OR LIMITED



OUTPUT  
PER LIGHT

MAXIMUM  
VS  
+\$  
MULTIPLE LIGHTS  
NEEDED



OE MOUNTS  
& ACCESSORIES

OFFERED  
VS  
NONE  
OR LIMITED

## WARRANTY

If you own a RIGID light  
and it breaks, we will replace  
or repair it for life.



CUSTOMER  
SERVICE

**RIGID**  
VS  
OTHERS

DEDICATED  
USA BASED  
VS  
WHO DO  
YOU CALL?



SHIP PRODUCT TO  
FACILITY

US  
ADDRESS  
VS  
NOWHERE  
TO SEND IT?



PRODUCT  
SERVICE

REPAIRED OR  
REPLACED  
VS  
NOT COVERED  
OR REPLACED WITH  
ANOTHER INFERIOR  
PRODUCT




PRODUCT

DESIGNED,  
ENGINEERED, AND  
ASSEMBLED  
IN THE USA  
VS  
WHO KNOWS  
WHERE THE LIGHTS  
ARE MADE?

 [LEARN MORE | RIGIDINDUSTRIES.COM/ABOUT/WARRANTY](https://www.rigidindustries.com/about/warranty)


# HOW TO CHOOSE AN OPTIC

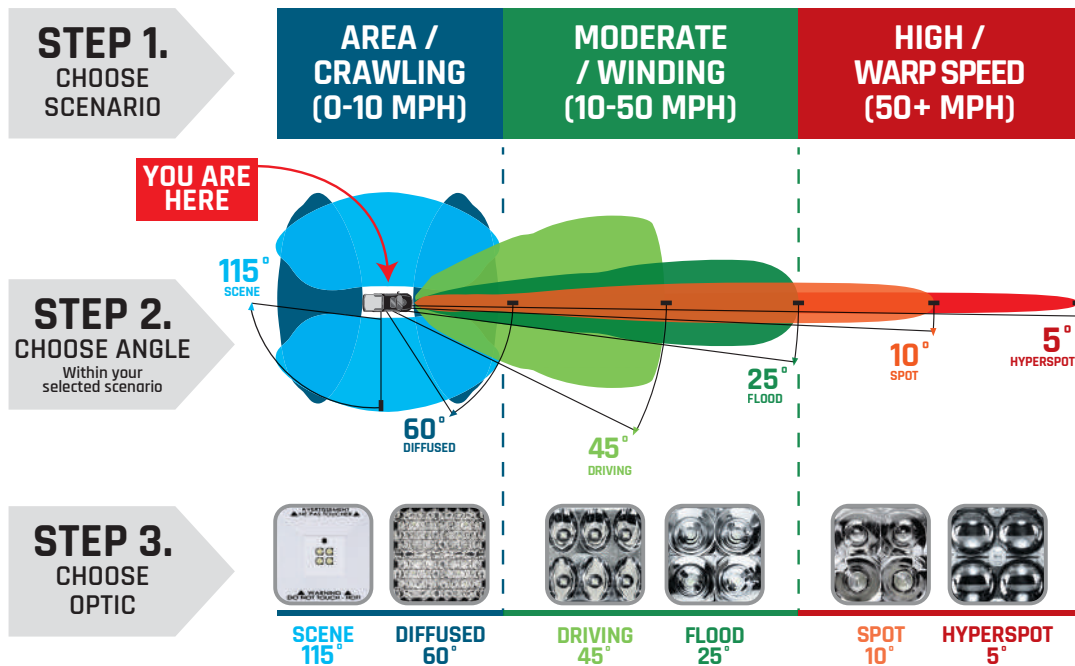

**NEW**  
WEB BASED  
APPLICATION

## RIGID VIEWPOINT

**SELECT LIGHTS & OPTICS  
THEN COMPARE IN REAL WORLD SCENE**

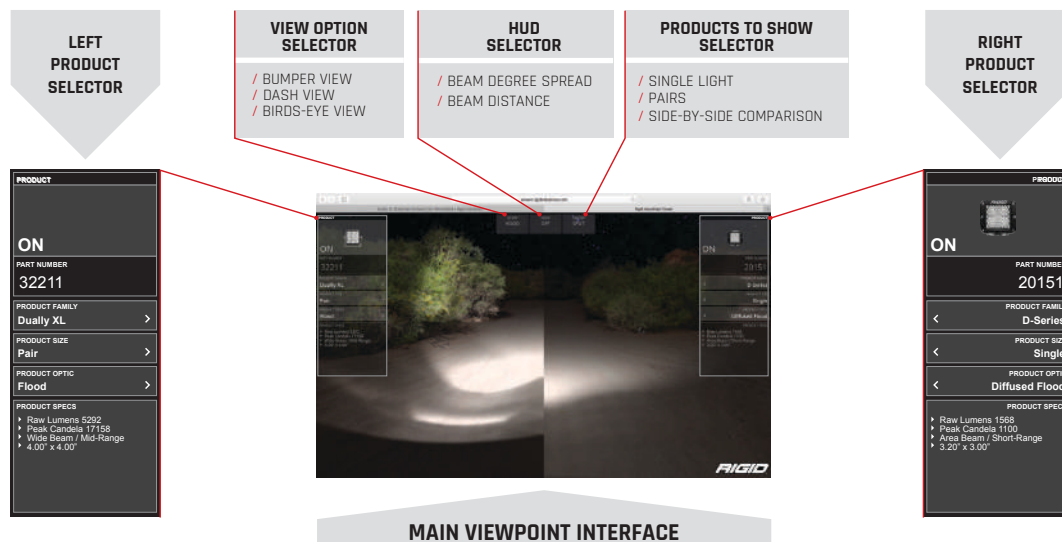

**LEARN MORE** | [RIGIDINDUSTRIES.COM/VIEWPOINT](http://RIGIDINDUSTRIES.COM/VIEWPOINT)



# HOW TO NAVIGATE THIS CATALOG

Follow the Navigation Key below to find information needed to help you through the process of choosing the light or lights that are right for you.

## NAVIGATION KEY



**D-SERIES**

The D-Series is the most versatile compact lighting package on the market today, available with a variety of mounting options including surface, hook or bracket. The D-Series can be utilized for virtually any lighting application. Measuring just 3" x 3", the D-Series packs a powerful punch from 1000 to 2000 lumens depending on the optics chosen. Customers have used these versatile lights for interior signs on a truck, a headlight light for a motorcycle, flood lighting for a trailer, auxiliary lighting on construction and mining equipment, and many other applications that require a powerful, efficient light in a small space.

D-Series lights are also available with a durable white finish. Design suitable for marine applications, D-Series lighting products are perfect for use anywhere an alternative to stock is desired. The distinctive white is a durable, air-resistant powder coated finish with an additional chemical treatment coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of Hella's lighting products, providing reliable, low-maintenance lighting on demand.

**ADDITIONAL VEHICLE SPECIFIC MOUNTS AVAILABLE**

**FEATURES**

- D-Series: Most compact
- 3000K-6000K
- Available in 1000, 1500, 2000, 3000, 4000, 5000, 6000, 7000, 8000, 9000, 10000, 12000, 15000, 20000, 30000, 40000, 50000, 60000, 70000, 80000, 90000, 100000, 120000, 150000, 200000, 300000, 400000, 500000, 600000, 700000, 800000, 900000, 1000000, 1200000, 1500000, 2000000, 3000000, 4000000, 5000000, 6000000, 7000000, 8000000, 9000000, 10000000, 12000000, 15000000, 20000000, 30000000, 40000000, 50000000, 60000000, 70000000, 80000000, 90000000, 100000000, 120000000, 150000000, 200000000, 300000000, 400000000, 500000000, 600000000, 700000000, 800000000, 900000000, 1000000000, 1200000000, 1500000000, 2000000000, 3000000000, 4000000000, 5000000000, 6000000000, 7000000000, 8000000000, 9000000000, 10000000000, 12000000000, 15000000000, 20000000000, 30000000000, 40000000000, 50000000000, 60000000000, 70000000000, 80000000000, 90000000000, 100000000000, 120000000000, 150000000000, 200000000000, 300000000000, 400000000000, 500000000000, 600000000000, 700000000000, 800000000000, 900000000000, 1000000000000, 1200000000000, 1500000000000, 2000000000000, 3000000000000, 4000000000000, 5000000000000, 6000000000000, 7000000000000, 8000000000000, 9000000000000, 10000000000000, 12000000000000, 15000000000000, 20000000000000, 30000000000000, 40000000000000, 50000000000000, 60000000000000, 70000000000000, 80000000000000, 90000000000000, 100000000000000, 120000000000000, 150000000000000, 200000000000000, 300000000000000, 400000000000000, 500000000000000, 600000000000000, 700000000000000, 800000000000000, 900000000000000, 1000000000000000, 1200000000000000, 1500000000000000, 2000000000000000, 3000000000000000, 4000000000000000, 5000000000000000, 6000000000000000, 7000000000000000, 8000000000000000, 9000000000000000, 10000000000000000, 12000000000000000, 15000000000000000, 20000000000000000, 30000000000000000, 40000000000000000, 50000000000000000, 60000000000000000, 70000000000000000, 80000000000000000, 90000000000000000, 100000000000000000, 120000000000000000, 150000000000000000, 200000000000000000, 300000000000000000, 400000000000000000, 500000000000000000, 600000000000000000, 700000000000000000, 800000000000000000, 900000000000000000, 1000000000000000000, 1200000000000000000, 1500000000000000000, 2000000000000000000, 3000000000000000000, 4000000000000000000, 5000000000000000000, 6000000000000000000, 7000000000000000000, 8000000000000000000, 9000000000000000000, 10000000000000000000, 12000000000000000000, 15000000000000000000, 20000000000000000000, 30000000000000000000, 40000000000000000000, 50000000000000000000, 60000000000000000000, 70000000000000000000, 80000000000000000000, 90000000000000000000, 100000000000000000000, 120000000000000000000, 150000000000000000000, 200000000000000000000, 300000000000000000000, 400000000000000000000, 500000000000000000000, 600000000000000000000, 700000000000000000000, 800000000000000000000, 900000000000000000000, 1000000000000000000000, 1200000000000000000000, 1500000000000000000000, 2000000000000000000000, 3000000000000000000000, 4000000000000000000000, 5000000000000000000000, 6000000000000000000000, 7000000000000000000000, 8000000000000000000000, 9000000000000000000000, 10000000000000000000000, 12000000000000000000000, 15000000000000000000000, 20000000000000000000000, 30000000000000000000000, 40000000000000000000000, 50000000000000000000000, 60000000000000000000000, 70000000000000000000000, 80000000000000000000000, 90000000000000000000000, 100000000000000000000000, 120000000000000000000000, 150000000000000000000000, 200000000000000000000000, 300000000000000000000000, 400000000000000000000000, 500000000000000000000000, 600000000000000000000000, 700000000000000000000000, 800000000000000000000000, 900000000000000000000000, 1000000000000000000000000, 1200000000000000000000000, 1500000000000000000000000, 2000000000000000000000000, 3000000000000000000000000, 4000000000000000000000000, 5000000000000000000000000, 6000000000000000000000000, 7000000000000000000000000, 8000000000000000000000000, 9000000000000000000000000, 10000000000000000000000000, 12000000000000000000000000, 15000000000000000000000000, 20000000000000000000000000, 30000000000000000000000000, 40000000000000000000000000, 50000000000000000000000000, 60000000000000000000000000, 70000000000000000000000000, 80000000000000000000000000, 90000000000000000000000000, 100000000000000000000000000, 120000000000000000000000000, 150000000000000000000000000, 200000000000000000000000000, 300000000000000000000000000, 400000000000000000000000000, 500000000000000000000000000, 600000000000000000000000000, 700000000000000000000000000, 800000000000000000000000000, 900000000000000000000000000, 1000000000000000000000000000, 1200000000000000000000000000, 1500000000000000000000000000, 2000000000000000000000000000, 3000000000000000000000000000, 4000000000000000000000000000, 5000000000000000000000000000, 6000000000000000000000000000, 7000000000000000000000000000, 8000000000000000000000000000, 9000000000000000000000000000, 10000000000000000000000000000, 12000000000000000000000000000, 15000000000000000000000000000, 20000000000000000000000000000, 30000000000000000000000000000, 40000000000000000000000000000, 50000000000000000000000000000, 60000000000000000000000000000, 70000000000000000000000000000, 80000000000000000000000000000, 90000000000000000000000000000, 100000000000000000000000000000, 120000000000000000000000000000, 150000000000000000000000000000, 200000000000000000000000000000, 300000000000000000000000000000, 400000000000000000000000000000, 500000000000000000000000000000, 600000000000000000000000000000, 700000000000000000000000000000, 800000000000000000000000000000, 900000000000000000000000000000, 1000000000000000000000000000000, 1200000000000000000000000000000, 1500000000000000000000000000000, 2000000000000000000000000000000, 3000000000000000000000000000000, 4000000000000000000000000000000, 5000000000000000000000000000000, 6000000000000000000000000000000, 7000000000000000000000000000000, 8000000000000000000000000000000, 9000000000000000000000000000000, 10000000000000000000000000000000, 12000000000000000000000000000000, 15000000000000000000000000000000, 20000000000000000000000000000000, 30000000000000000000000000000000, 40000000000000000000000000000000, 50000000000000000000000000000000, 60000000000000000000000000000000, 70000000000000000000000000000000, 80000000000000000000000000000000, 90000000000000000000000000000000, 100000000000000000000000000000000, 120000000000000000000000000000000, 150000000000000000000000000000000, 200000000000000000000000000000000, 300000000000000000000000000000000, 400000000000000000000000000000000, 500000000000000000000000000000000, 600000000000000000000000000000000, 700000000000000000000000000000000, 800000000000000000000000000000000, 900000000000000000000000000000000, 1000000000000000000000000000000000, 1200000000000000000000000000000000, 1500000000000000000000000000000000, 2000000000000000000000000000000000, 3000000000000000000000000000000000, 4000000000000000000000000000000000, 5000000000000000000000000000000000, 6000000000000000000000000000000000, 7000000000000000000000000000000000, 8000000000000000000000000000000000, 9000000000000000000000000000000000, 10000000000000000000000000000000000, 12000000000000000000000000000000000, 15000000000000000000000000000000000, 20000000000000000000000000000000000, 30000000000000000000000000000000000, 40000000000000000000000000000000000, 50000000000000000000000000000000000, 60000000000000000000000000000000000, 70000000000000000000000000000000000, 80000000000000000000000000000000000, 90000000000000000000000000000000000, 100000000000000000000000000000000000, 120000000000000000000000000000000000, 150000000000000000000000000000000000, 200000000000000000000000000000000000, 300000000000000000000000000000000000, 400000000000000000000000000000000000, 500000000000000000000000000000000000, 600000000000000000000000000000000000, 700000000000000000000000000000000000, 800000000000000000000000000000000000, 900000000000000000000000000000000000, 1000000000000000000000000000000000000, 1200000000000000000000000000000000000, 1500000000000000000000000000000000000, 2000000000000000000000000000000000000, 3000000000000000000000000000000000000, 4000000000000000000000000000000000000, 5000000000000000000000000000000000000, 6000000000000000000000000000000000000, 7000000000000000000000000000000000000, 8000000000000000000000000000000000000, 9000000000000000000000000000000000000, 10000000000000000000000000000000000000, 12000000000000000000000000000000000000, 15000000000000000000000000000000000000, 20000000000000000000000000000000000000, 30000000000000000000000000000000000000, 40000000000000000000000000000000000000, 50000000000000000000000000000000000000, 60000000000000000000000000000000000000, 70000000000000000000000000000000000000, 80000000000000000000000000000000000000, 90000000000000000000000000000000000000, 100000000000000000000000000000000000000, 120000000000000000000000000000000000000, 150000000000000000000000000000000000000, 200000000000000000000000000000000000000, 300000000000000000000000000000000000000, 400000000000000000000000000000000000000, 500000000000000000000000000000000000000, 600000000000000000000000000000000000000, 700000000000000000000000000000000000000, 800000000000000000000000000000000000000, 900000000000000000000000000000000000000, 1000000000000000000000000000000000000000, 1200000000000000000000000000000000000000, 1500000000000000000000000000000000000000, 2000000000000000000000000000000000000000, 3000000000000000000000000000000000000000, 4000000000000000000000000000000000000000, 5000000000000000000000000000000000000000, 6000000000000000000000000000000000000000, 7000000000000000000000000000000000000000, 8000000000000000000000000000000000000000, 9000000000000000000000000000000000000000, 100, 12000000000000000000000000000000000000000, 15000000000000000000000000000000000000000, 200, 300, 400, 500, 600, 700, 800, 900, 1000, 1200, 1500, 2000, 3000, 4000, 5000, 6000, 7000, 8000, 9000, 100, 12000, 15000, 200, 300, 400, 500, 600, 700, 800, 900, 1000, 1200, 1500, 2000, 3000, 4000, 5000, 6000, 7000, 80000000000

# LIGHTS

pg 11 - pg 109

## **BUILD INCLUDES**

Radiance Pod | PG. 27  
Radiance+ | PG. 23










# ADAPT™

The RIGID® Adapt™ LED Light Bars are the world's first off-road lighting products that can change instantly according to conditions. Adapt offers 8 selectable beam patterns that range from broad short-distance lighting to highly focused long-distance lighting in a single fixture. It also includes RIGID's new Active View™ Technology, which allows the beam pattern to actively adjust with vehicle speed. There are no moving parts within the Adapt. Instead, RIGID uses advanced LED technology and combines it with patented new optics to create a revolutionary lighting solution that can Adapt with changing conditions. Further, Adapt has built-in accent lighting that can be set to any color in the light spectrum, including white, for a custom look around town. The Adapt has a signature new look that is unlike any other light bar on the market, and it even has expanded mounting capabilities that include new base-mounting options in addition to traditional side mounts. Adapt LED light bars include a RIGID Dash Controller, which is a molded backlit dash-mounted unit that offers easy, intuitive control of Adapt's beam patterns, Adaptive Mode, accent lighting, and programmable presets. RIGID Adapt Light Bars are available in 10-inch to 50-inch lengths and include a RIGID Dash Controller, Under Dash Module, wiring harness, and mounting hardware. With the RIGID Adapt, it has never been easier to Own the Night.

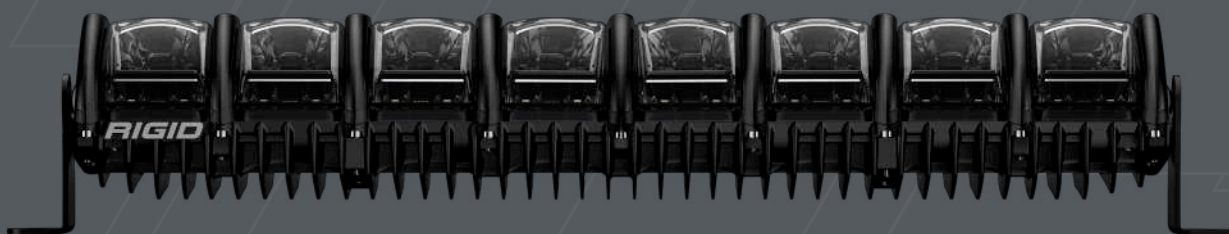

**8 MODE -  
ACTIVE VIEW  
TECHNOLOGY**



## RGBW ACCENT LIGHTING




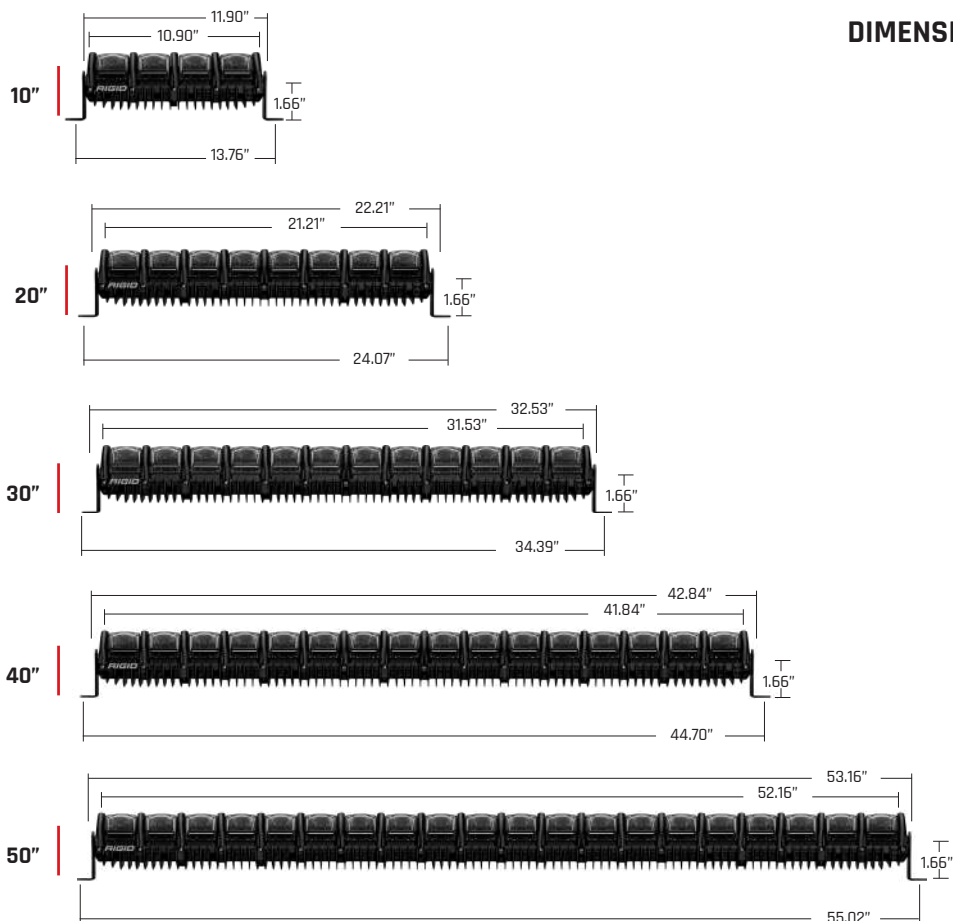
### FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Dash Controller Included
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Op. Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration

## DASH CONTROLLER



-  Active View™ Technology - Automatically Change Beam Patterns Based On Vehicle Speed
- Dash Controller & Under Dash Module with Wiring Harness
- Molded RIGID Dash Controller with 2 User Presets - Preset Both Beam Pattern Mode & Accent Lighting Colors
- 8 Selectable Beam Patterns from 15-Degrees to 90-Degrees
- Integrated Optic Design with Spot, Flood, and Driving Zones
- Selectable RGB-W Accent Lighting - With User-Configuration, Choose from any Color in the Light Spectrum
- Back Lit Molded Dash Controller - Enables User to Select Mode, Accent Color, Adaptive Mode, and Select Between 2 User Presets
- Multiple Mounting Locations; Traditional Side Mounting or Underside Low-Profile\* (Sold Separately)
- Patent-Pending Technology



### DIMENSIONS





BEAM PATTERNS  
THAT CAN  
ACTIVELY ADJUST  
WITH CHANGING  
CONDITIONS



## 8 BEAM PATTERNS MODES


The RIGID Adapt offers 8 selectable beam patterns that range from broad short-distance lighting to highly focus long-distance lighting in a single fixture. It also includes RIGID's new Active View™ Technology, which allows the beam pattern to actively adjust with vehicle speed. There are no moving parts within the Adapt. Instead, RIGID uses advanced LED technology and combines it with patented new optics to create a revolutionary lighting solution that can Adapt with changing conditions.



### 8 MODES


#### MODE 1

FLOOD   
DRIVING   
SPOT 




#### MODE 2

FLOOD   
DRIVING   
SPOT 



#### MODE 3

FLOOD   
DRIVING   
SPOT 




#### MODE 4

FLOOD   
DRIVING   
SPOT 




#### MODE 5

FLOOD   
DRIVING   
SPOT 

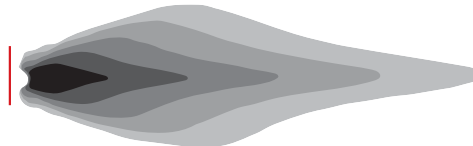


#### MODE 6

FLOOD   
DRIVING   
SPOT 

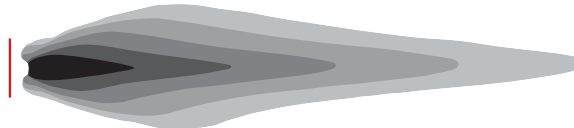

#### MODE 7

FLOOD   
DRIVING   
SPOT 



#### MODE 8

FLOOD   
DRIVING   
SPOT 





**ACTIVE MODE -  
MULTIPLE PRESET  
OUTPUTS IN ONE  
LIGHT**

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



SIZE	PART#	MODE	WT (LBS.)	WATTS	AMP DRAW @14VDC	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)	HORIZONTAL FIELD DEGREE
10"	210413	1	5.3	80	5.7	28	6848	78	88	177	7874.6	90°
		2	5.3	88	6.3	28	6985	123	111	222	12324	75°
		3	5.3	93	6.6	28	7173	157	125	251	15794	70°
		4	5.3	94	6.7	28	7360	191	138	277	19192	65°
		5	5.3	90	6.4	28	6840	442	210	420	44258	35°
		6	5.3	87	6.2	28	6320	523	228	457	52324	25°
		7	5.3	78	5.6	28	5800	1228	350	701	122877	20°
		8	5.3	69	4.9	28	5280	1590	398	797	159081	15°
20"	220413	1	10	160	11.4	56	13696	156	125	250	15633	90°
		2	10	176	12.6	56	13970	237	154	308	23791	75°
		3	10	186	13.3	56	14346	316	177	355	31603	70°
		4	10	187	13.4	56	14720	380	195	389	39008	65°
		5	10	180	12.9	56	13680	919	303	606	91999	35°
		6	10	174	12.4	56	12640	1546	393	786	154626	25°
		7	10	156	11.1	56	11600	2126	461	922	212661	20°
		8	10	138	9.8	56	10560	2916	540	1080	291643	15°
30"	230413	1	14.6	240	17.2	84	20544	226	150	300	22638	90°
		2	14.6	265	18.9	84	20955	347	186	373	34797	75°
		3	14.6	278	19.9	84	21519	455	213	427	45580	70°
		4	14.6	281	20.0	84	22080	542	232	465	54212	65°
		5	14.6	270	19.3	84	20520	1188	344	689	118875	35°
		6	14.6	261	18.6	84	18960	1842	429	858	184238	25°
		7	14.6	234	16.7	84	17400	2485	498	997	248539	20°
		8	14.6	207	14.8	84	15840	3666	605	1211	366611	15°
40"	240413	1	19.3	320	22.9	112	27392	315	177	355	31592	90°
		2	19.3	353	25.2	112	27940	461	214	429	46116	75°
		3	19.3	371	26.5	112	28692	604	245	491	60462	70°
		4	19.3	374	26.7	112	29440	710	266	533	71064	65°
		5	19.3	361	25.8	112	27360	1466	382	765	146620	35°
		6	19.3	348	24.8	112	26280	2354	485.3	970	235499	25°
		7	19.3	312	22.3	112	23200	3170	563	1126	317005	20°
		8	19.3	276	19.7	112	21120	4399	663	1326	439924	15°
50"	250413	1	24.2	400	28.6	140	34240	353	188	376	35348	90°
		2	24.2	441	31.5	140	34925	509	225	451	50992	75°
		3	24.2	464	33.1	140	35865	665	258	516	66585	70°
		4	24.2	468	33.4	140	36800	783	279	559	78370	65°
		5	24.2	451	32.2	140	34200	1577	397	794	157756	35°
		6	24.2	435	31.1	140	31600	2602	510	1020	260282	25°
		7	24.2	390	27.9	140	29000	3496	591	1182	349697	20°
		8	24.2	344	24.6	140	26400	4765	690	1380	476570	15°



## LIGHTS COME WITH

- GPS Module
- Mounting Hardware
- Black Powder Coated, L-Shape Brackets
- Dash Controller & Under Dash Module with Wiring Harness and Hardware

## SOLD SEPARATELY

- Underside Low-Profile Mounts
- Light Covers

# D-SS<sup>®</sup> PRO

One of RIGID's most versatile, compact lighting solutions just got better with the RIGID D-SS PRO, Dually Side Shooter LED pod. Perfect for any application that requires a wide spread beam, including A-Pillars, Fog Lights, and motorcycle applications. The D-SS PRO incorporates powerful optics and recently improved LED technology for greater output with the added benefit of additional LEDs aimed to the side for a much broader beam. The D-SS PRO packs a powerful punch up to 7,920 lumens depending on the optics chosen. The D-SS fixtures boast up to 120-degrees of horizontal lighting coverage when used in pairs or when used in the single light applications. The main forward-facing LEDs are available with RIGID's advanced Flood, Spot, or Driving optics, so there's a D-SS PRO lighting solution for nearly any application. The D-SS PRO LED lights are available in pairs with three side-shooting LEDs on one side of each fixture, or in single applications with a pair of side-shooting LEDs on both sides of the fixture. Only RIGID provides a broad, powerful lighting solution in such a compact package.

RIGID's D-SS PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

120° LIGHT  
COVERAGE









## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector

## DIMENSIONS & MOUNTS



### SURFACE MOUNT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### SINGLES

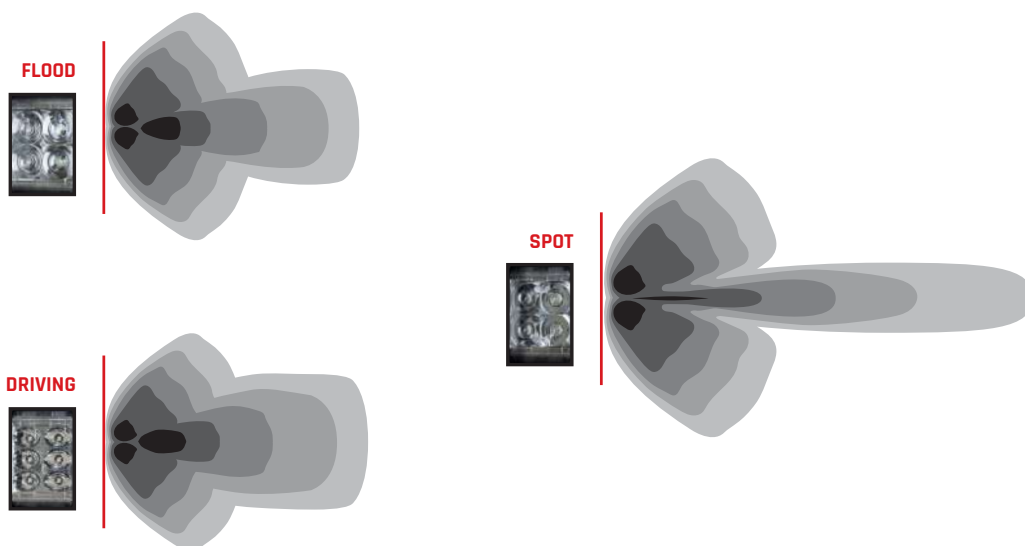

### PAIRS

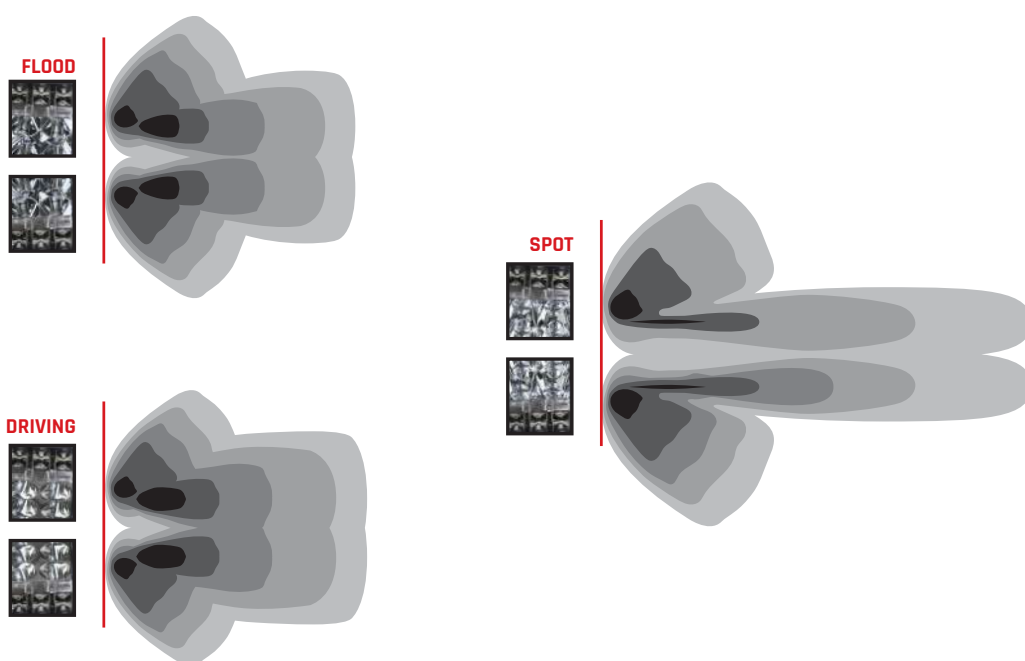

HOW MUCH  
OUTPUT DO  
I NEED?


A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SINGLES


### SINGLES / SPECIFICATIONS

	MOUNT	BLACK SINGLE	WHITE SINGLE	WT. (LBS.)	WATTS	AMP DRAW @14VDC	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>FLOOD</b>	SM	261113	861113	1.22	54	3.86	8	6336	2793	60	77	155	6070
<b>SPOT</b>	SM	261213	861213	1.22	54	3.86	8	6336	2793	652	255	510	65241
<b>DRIVING</b>	SM	261313	861313	1.22	57	4.07	10	7920	3675	219	148	296	21936

### SINGLE CONFIGURATION

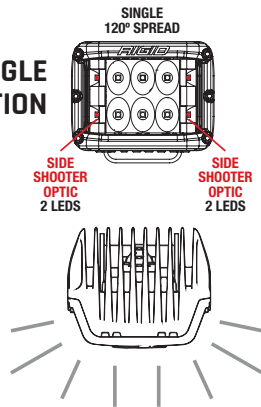

### PAIR CONFIGURATION

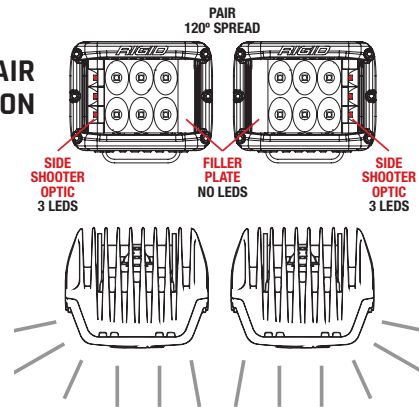

## PAIRS

SPECIFICATIONS ARE DISPLAYED PER SINGLE LIGHT

### PAIRS / SPECIFICATIONS

	MOUNT	BLACK PAIR	WHITE PAIR	WT. (LBS.)	WATTS	AMP DRAW @14VDC	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>FLOOD</b>	SM	262113	862113	2.44	47	3.36	7	5544	2425	71	84	168	7129
<b>SPOT</b>	SM	262213	862213	2.44	47	3.36	7	5544	2425	652	255	510	65241
<b>DRIVING</b>	SM	262313	862313	2.44	72	5.14	9	7128	3308	281	167	335	28108

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



### LIGHTS COME WITH

- Lights come as Singles or Pairs
- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Harness w/Switch
- Deutsch Connector



# RADIANCE CURVED<sup>TM</sup> PLUS

The RIGID Radiance Curved Plus light bar is the perfect solution for those who want RIGID's legendary quality at a level everyone can attain. Featuring improved LED technology, the Radiance Curved Plus offers more light output than ever before while consuming a fraction of the power compared to incandescent lighting. The RIGID Radiance Curved Plus is built with the same high-grade aluminum alloy housing as our legendary RDS-Series, but that's where the visual similarities end. Inside, the Radiance Curved Plus is feature packed, with a black exposed printed circuit board, optimized forward projecting Broad Spot optics which combine the attributes of a spot and flood beam pattern, and recent updates in LED technology that boast up 7128 raw lumens in the 20" size. Further, the Radiance Curved Plus has back-lighting available in white, amber, red, blue and green. The RIGID Radiance Curved Plus is for the customer who wants a truly custom look that only RIGID can provide. Even better, the Radiance Curved Plus now includes a Multi-Trigger Harness designed specifically for the Radiance Curved Plus. The Radiance Curved Plus Multi-Trigger Harness also comes standard with two separate backlit LED rocker switches (red and blue), so each circuit can be used independently. Radiance Curved Plus Light Bars are available in 20" - 54" lengths.



**BACK-LIGHTING  
AVAILABLE  
IN 5 COLORS**



"Consult your Rigid Industries' installation manual, the Rigid Industries' website and any local, state and federal laws, rules and regulations to determine whether your particular application/installation is authorized for use on a public highway."



## FEATURES

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- E-Series Construction & Durability
- Complete Multi-Switch Wiring Harness Included
- Independently Controlled Back-Lighting Available in White, Amber, Red, Blue or Green
- Dedicated Wire to Run Back-Lighting without Primary LEDs
- Black Powder Coated Mounting Brackets
- Black Exposed Circuit Board
- Patent-Pending Technology



## DIMENSIONS



Complete Multi-Switch  
Wiring Harness Included




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### BROAD SPOT OPTIC

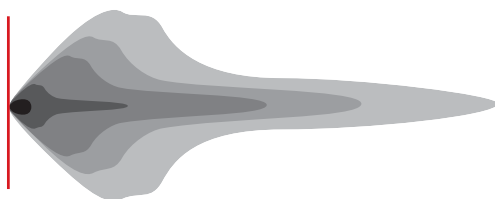

The RDS Output Technology™  
(U.S. Patent No. D713,574 & U.S. Patent No. 6,986,593)



HOW MUCH  
OUTPUT DO  
I NEED?

## SPECIFICATIONS



	SIZE	BLACK PART NO.	WT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*RAW LUMENS
<b>WHITE BACK LIGHT</b>	20"	32000	6.31	92	6.57	9	7128
	30"	33000	8.99	155	11.07	15	11880
	40"	34000	12.40	204	14.57	21	16632
	50"	35000	14.26	243	17.36	27	21384
	54"	36000	16.07	243	17.36	27	21384
<b>BLUE BACK LIGHT</b>	20"	32001	6.31	92	6.57	9	7128
	30"	33001	8.99	155	11.07	15	11880
	40"	34001	12.40	204	14.57	21	16632
	50"	35001	14.26	243	17.36	27	21384
	54"	36001	16.07	243	17.36	27	21384
<b>RED BACK LIGHT</b>	20"	32002	6.31	92	6.57	9	7128
	30"	33002	8.99	155	11.07	15	11880
	40"	34002	12.40	204	14.57	21	16632
	50"	35002	14.26	243	17.36	27	21384
	54"	36002	16.07	243	17.36	27	21384
<b>GREEN BACK LIGHT</b>	20"	32003	6.31	92	6.57	9	7128
	30"	33003	8.99	155	11.07	15	11880
	40"	34003	12.40	204	14.57	21	16632
	50"	35003	14.26	243	17.36	27	21384
	54"	36003	16.07	243	17.36	27	21384
<b>AMBER BACK LIGHT</b>	20"	32004	6.31	92	6.57	9	7128
	30"	33004	8.99	155	11.07	15	11880
	40"	34004	12.40	204	14.57	21	16632
	50"	35004	14.26	243	17.36	27	21384
	54"	36004	16.07	243	17.36	27	21384

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



## LIGHTS COME WITH

- Mounting Hardware
- Black Powder Coated, L-Shape Brackets
- Open Leads, No Connector
- 2ft Wire Extension (20" - 50")
- Complete Multi-Switch Wiring Harness PN 40200



# RADIANCE<sup>TM</sup> PLUS

The RIGID Radiance Plus light bar is the perfect solution for those who want RIGID's legendary quality at a level everyone can attain. Featuring improved LED technology, the Radiance Plus offers more light output than ever before while consuming a fraction of the power compared to incandescent lighting. The RIGID Radiance Plus is built with the same high-grade aluminum alloy housing as our legendary E-Series, but that's where the visual similarities end. Inside, the Radiance Plus light bar is feature-packed, with a black exposed printed circuit board, optimized forward projecting Broad Spot optics which combine the attributes of a spot and flood beam pattern, and recent updates in LED technology that boast up to 21,384 raw lumens. Further, the Radiance Plus has back-lighting available in white, amber, red, blue and green. The RIGID Radiance Plus light bar is for the customer who wants a truly custom look that only RIGID can provide. Even better, the Radiance Plus now includes a Multi-Trigger Harness designed specifically for the Radiance Plus light bar. The Radiance Multi-Trigger Harness also comes standard with two separate backlit LED rocker switches (red and blue), so each circuit can be used independently. Radiance Plus Light Bars are available in 10" - 50" lengths.



**BACK-LIGHTING  
AVAILABLE  
IN 5 COLORS**




"Consult your Rigid Industries' installation manual, the Rigid Industries' website and any local, state and federal laws, rules and regulations to determine whether your particular application/installation is authorized for use on a public highway."



## FEATURES

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- E-Series Construction & Durability
- Complete Multi-Switch Wiring Harness Included
- Independently Controlled Back-Lighting Available in White, Amber, Red, Blue or Green
- Dedicated Wire to Run Back-Lighting without Primary LEDs
- Black Powder Coated Mounting Brackets
- Black Exposed Circuit Board
- Patent-Pending Technology

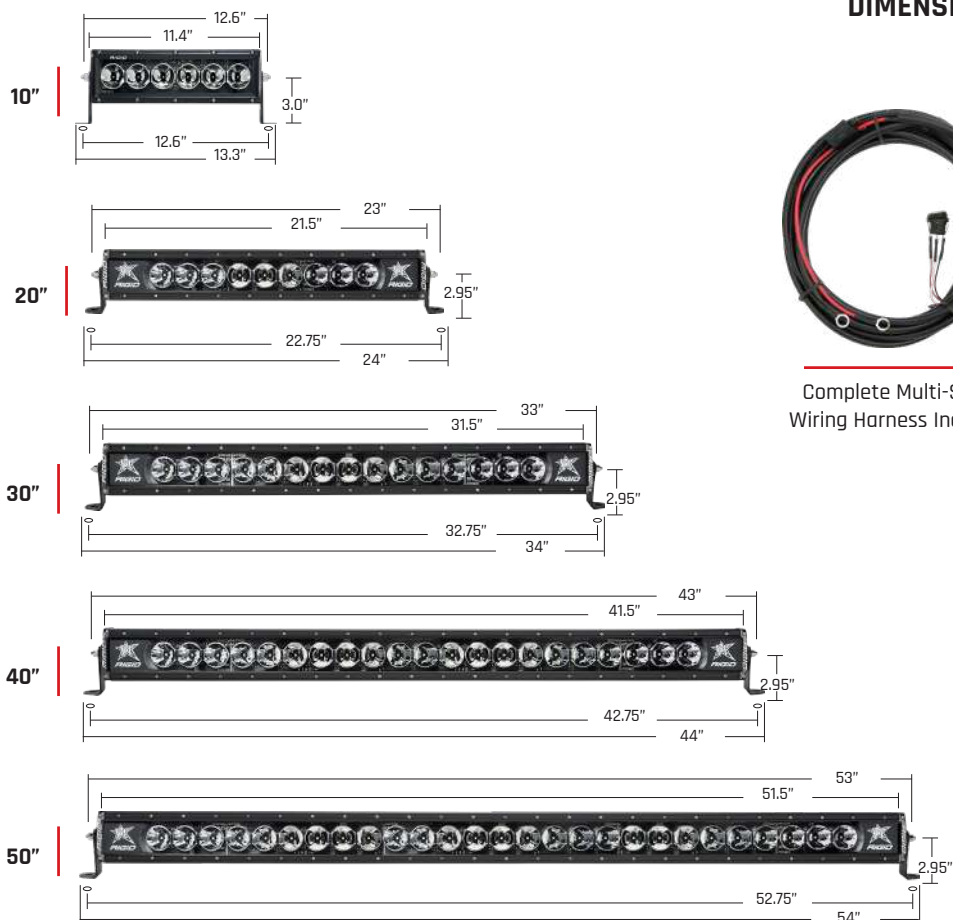

## DIMENSIONS



Complete Multi-Switch  
Wiring Harness Included


WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### BROAD SPOT OPTIC

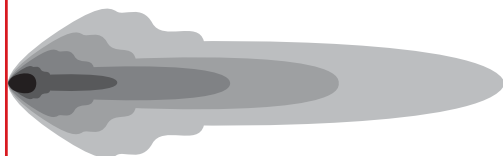



HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	SIZE	BLACK PART NO.	WT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
WHITE BACK LIGHT	10"	210003	4.12	70	5	6	4572	3528	835	289	578	83499
	20"	220003	7.65	92	6.57	9	7128	5292	1295	359	719	129536
	30"	230003	10.55	155	11.07	15	11880	8820	1991	446	892	199108
	40"	240003	13.61	204	14.57	21	16632	12348	2595	509	1019	259599
	50"	250003	16.84	243	17.36	27	21384	15876	3015	349	1098	301509
BLUE BACK LIGHT	10"	210013	4.12	70	5	6	4572	3528	835	289	578	83499
	20"	220013	7.65	92	6.57	9	7128	5292	1295	359	719	129536
	30"	230013	10.55	155	11.07	15	11880	8820	1991	446	892	199108
	40"	240013	13.61	204	14.57	21	16632	12348	2595	509	1019	259599
	50"	250013	16.84	243	17.36	27	21384	15876	3015	349	1098	301509
RED BACK LIGHT	10"	210023	4.12	70	5	6	4572	3528	835	289	578	83499
	20"	220023	7.65	92	6.57	9	7128	5292	1295	359	719	129536
	30"	230023	10.55	155	11.07	15	11880	8820	1991	446	892	199108
	40"	240023	13.61	204	14.57	21	16632	12348	2595	509	1019	259599
	50"	250023	16.84	243	17.36	27	21384	15876	3015	349	1098	301509
GREEN BACK LIGHT	10"	210033	4.12	70	5	6	4572	3528	835	289	578	83499
	20"	220033	7.65	92	6.57	9	7128	5292	1295	359	719	129536
	30"	230033	10.55	155	11.07	15	11880	8820	1991	446	892	199108
	40"	240033	13.61	204	14.57	21	16632	12348	2595	509	1019	259599
	50"	250033	16.84	243	17.36	27	21384	15876	3015	349	1098	301509
AMBER BACK LIGHT	10"	210043	4.12	70	5	6	4572	3528	835	289	578	83499
	20"	220043	7.65	92	6.57	9	7128	5292	1295	359	719	129536
	30"	230043	10.55	155	11.07	15	11880	8820	1991	446	892	199108
	40"	240043	13.61	204	14.57	21	16632	12348	2595	509	1019	259599
	50"	250043	16.84	243	17.36	27	21384	15876	3015	349	1098	301509

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



## LIGHTS COME WITH

- Mounting Hardware
- Black Powder Coated, L-Shape Brackets
- Open Leads, No Connector
- 2ft Wire Extension (20" - 50")
- Complete Multi-Switch Wiring Harness PN 40200



# RADIANCE POD™

RIGID's innovative Radiance line continues to expand with the Radiance Pod, a unique lighting solution that offers RIGID's legendary quality at a level everyone can attain. A compact cube similar to RIGID's popular D-Series, the Radiance Pod features independently controlled back-lighting that is available in white, amber, green, red, or blue. The Radiance Pod is built with a rugged aluminum alloy housing to protect the three powerful LEDs inside, while a black exposed circuit board is visible through the durable polycarbonate lens for a unique industrial look. The Radiance Pod is sold in pairs and includes mounting brackets suitable for attachment to any flat surface.



**INDEPENDENTLY  
CONTROLLED  
BACK-LIGHTING**

"Consult your Rigid Industries' installation manual, the Rigid Industries' website and any local, state and federal laws, rules and regulations to determine whether your particular application/installation is authorized for use on a public highway."





## FEATURES

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness (Sold Separately)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- D-Series Construction & Durability
- Complete Multi-Switch Wiring Harness Available (Sold Separately - Part Number 40300)
- Independently Controlled Back-Lighting Available in White, Amber, Red, Blue or Green
- Dedicated Wire to Run Back-Lighting without Primary LEDs
- Stainless Steel Mounting Brackets
- Black Exposed Circuit Board
- Patent-Pending Technology

## DIMENSIONS



### SURFACE MOUNT



Complete Multi-Switch Wiring Harness Available  
**Sold Separately** - PN 40300




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

BROAD OPTIC

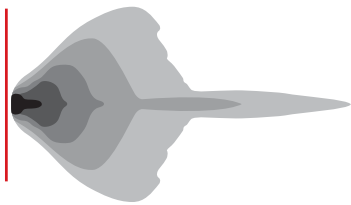



**HOW MUCH  
OUTPUT DO  
I NEED?**

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK PAIR	WT. (LBS.)	WATTS	AMP DRAW @ 14V	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>WHITE BACK LIGHT</b>	SM	20200	1.5	15	1	3	900	125	112	224	12456
<b>BLUE BACK LIGHT</b>	SM	20201	1.5	15	1	3	900	125	112	224	12456
<b>RED BACK LIGHT</b>	SM	20202	1.5	15	1	3	900	125	112	224	12456
<b>GREEN BACK LIGHT</b>	SM	20203	1.5	15	1	3	900	125	112	224	12456
<b>AMBER BACK LIGHT</b>	SM	20204	1.5	15	1	3	900	125	112	224	12456

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, U-Shape Brackets
- Open Leads, No Connector

### HARNESS SOLD SEPARATELY

- Complete Multi-Switch Wiring Harness - PN 40300



# CHASE™

The RIGID Chase rear facing LED light adds safety and functionality to any UTV, rail, buggy, Jeep, or other off-road application by packing reverse, courtesy, strobe, running (low power), and brake lights (high power) into a single compact package. A halo of powerful colored LEDs in red, amber, or blue around the perimeter of the aluminum housing can be used as a strobe (for racing and chase applications), running light, or third brake light. The center portion of the RIGID Chase functions as a 715 lumen white light suitable for use as a reverse or area light, and there's also a smaller downward-facing courtesy light for illuminating the cargo area. Whether it's used individually or wired in series, the RIGID Chase LED light is packed with features at a great value.



AMBER



BLUE



RED






## FEATURES

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP66 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Reverse Light and Curtesy Light
- Halo Features 3 Modes; Strobe, Running, Brake
- 3 Halo Color Options; Amber, Red, & Blue
- Universal 90° Mounting Bracket
- 1.75" - 2.00" Adjustable Tube Mount
- 5ft Multi-Trigger Lead for Versatile Configurations

## DIMENSIONS & MOUNTS

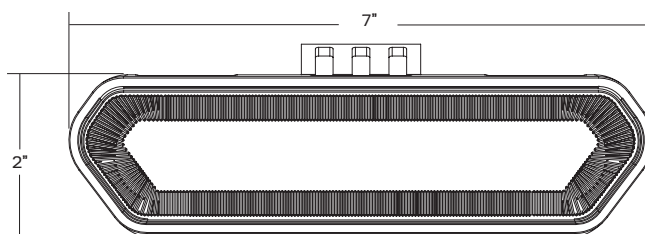

### SURFACE MOUNT


Universal 90° Mount Included




TOP  
FRONT



TOP  
BACK



BOTTOM  
FRONT




BOTTOM  
BACK

MOUNTING OPTIONS

### ADJUSTABLE TUBE MOUNT

Mount Included



FITS 1.75" - 2" TUBE


## COURTESY AND REVERSE BEAM PATTERNS




### BEAM PATTERNS

Unlike all of our other lights, the RIGID Chase does not have a forward-projecting light. But, the Chase does include both a courtesy and reverse light among its many features. The custom-designed graphs illustrate these beam patterns below.

#### COURTESY LIGHT



#### REVERSE LIGHT

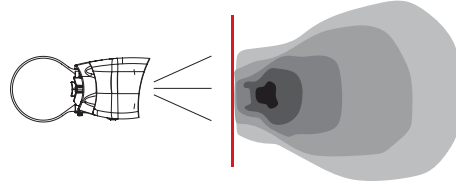


### MODES



COURTESY



REVERSE





RUNNING



STROBE



BRAKE

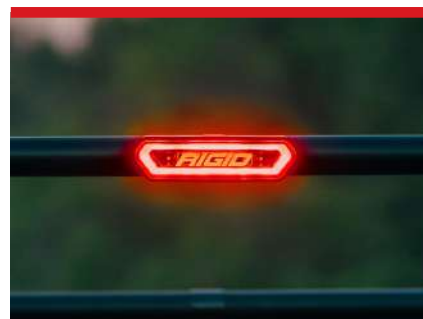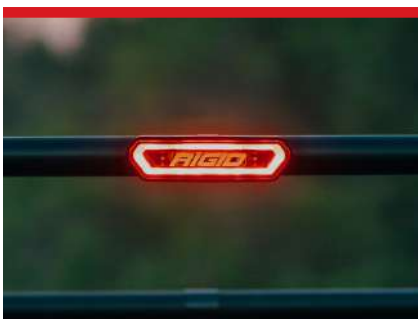



CHOOSE YOUR  
COLOR OPTION  
AMBER, RED  
OR BLUE


SPECIFICATIONS



CHASE

AMBER	RED	BLUE	MODE	WATTS	AMP DRAW @14VDC	*RAW LUMENS
90122	90133	90144	COURTESY LIGHT	4.2	0.3	168
			REVERSE LIGHT	9.8	0.7	715

\* Raw Lumens is based on LED manufacturer specifications.

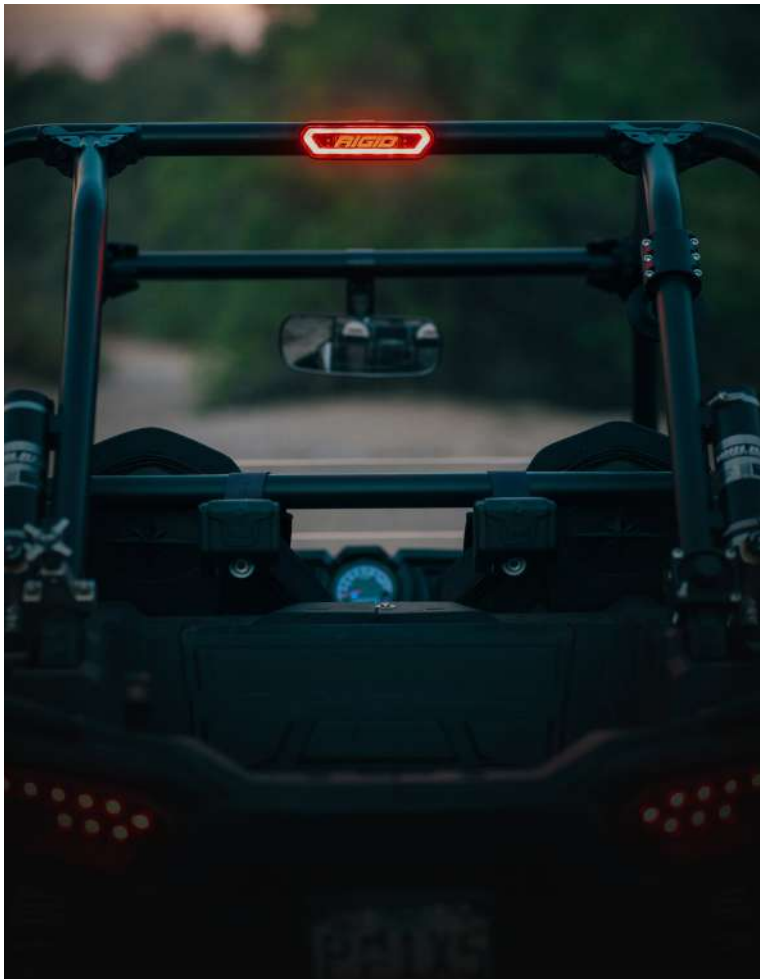

LIGHTS COME WITH

- Mounting Hardware
- Black Powder Coated, L-Shape Bracket
- Black Powder Coated, Adjustable Tube Clamp
- Multi-Trigger Open Leads, No Connector
- 5ft Wire Extension

# REAR FACING HIGH/LOW

Not all off-road situations require the same light intensity. RIGID Rear Facing High & Low Dual Function LED Lights in Amber or Red provide the flexibility to adjust the lighting to the conditions with the flip of a switch. These lights feature a three-wire harness, and the High, Low, or Off three-position rocker switch gives the user an option to run at full intensity on High power, or 20% intensity on Low power. Use the Low intensity mode for a Low Powered running light and the High Powered as a braking light. The RIGID Rear Facing High & Low Dual Function LED Lights feature a thermally engineered oversized heat sink to provide superior cooling power and a 50,000-hour lifespan. If one-size-fits-all lighting works for your needs, then the RIGID Rear Facing High & Low Function LED Lights are the perfect choice for adapting to changing conditions.

A rear view of a vehicle, likely a motorcycle or small truck, with its dual function LED lights illuminated in red. The vehicle has a license plate that reads "RIGID M" and a "BRP" logo. A red callout box points to one of the lights.

WITH A DUAL  
HIGH/ LOW  
FUNCTION



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

FOR DIMENSIONS,  
REFER TO THE  
FOLLOWING SERIES

SR-M PRO  
SR-Q PRO  
D-Series PRO

REAR FACING  
SR-M SERIES  
SURFACE MOUNT



REAR FACING  
SR-M SERIES  
FLUSH MOUNT

REAR FACING  
SR-Q SERIES  
SURFACE MOUNT



REAR FACING  
SR-Q SERIES  
FLUSH MOUNT

REAR FACING  
D-SERIES  
SURFACE MOUNT



REAR FACING  
D-SERIES  
FLUSH MOUNT

## SPECIFICATIONS




	MOUNT	RED PAIR	AMBER PAIR
<b>SR-M SERIES REAR FACING</b>	SM	90173	90171
	FM	90174	90172
<b>SR-Q SERIES REAR FACING</b>	SM	90163	90161
	FM	90164	90162
<b>D-SERIES REAR FACING</b>	SM	90153	90151
	FM	90154	90152

## BEAM PATTERNS (PAIR)



**DIFFUSED**  
Diffused lens



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Harness w/Switch
- Deutsch Connector
- Comes as a Pair



# REFLECT™

The RIGID Reflect is the first LED light that not only illuminates the road ahead, but also allows you to see what's behind. The RIGID Reflect is an advanced LED lighting solution with a fully adjustable side mirror all in one. Though originally developed for UTV and Powersports applications, the Reflect is a great solution for just about any off-road application. The Reflect uses RIGID's patented LED technology and new Side-Shooter optics to provide a wide beam of light for cornering and drifting. For even more versatility, there are also built-in amber LEDs on the outside edge of the fixture that can be used as turn signals, flashers, or even auxiliary running lights. The lights and mirror can be aimed independently, and tube mounting clamps are included to make installation easy. The RIGID Reflect is one more compact, versatile lighting solution that enables off-road enthusiasts to Own the Night™.







## FEATURES

- 50,000+ Hour Lifespan
- 9-32 VDC
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP69K Compliant - Dust / Water Ingress
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Light and Mirror Can Be Independently Adjusted
- Side Shooter Optic & Lenticular Lens for Enhanced Beam Width
- Integrated Amber LEDs for use as Running Lights or Turn Signal
- Fully Adjustable 1.75" - 2.00" Tube Mount Included
- Break Away Joint for Damage Prevention
- Convex Mirror for Enhanced Field of Vision
- 3-Wire Open Lead for Convenient Wiring
- Removable Trim Bezel - Can be Painted to Match the Color of Your Vehicle
- Angle Adjustment Ring for Mounting to Different Roll Cage Angles
- Bar Clamp Assembly Can be Removed to Mount Mirror to a Flat Surface

### LIGHT SIDE

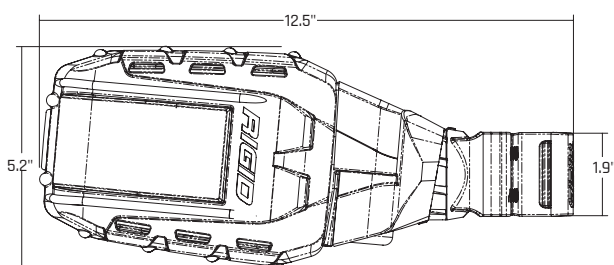

### MIRROR SIDE

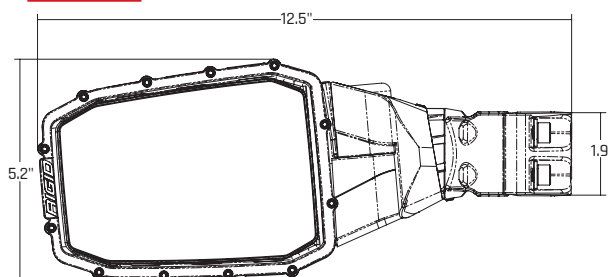


## DIMENSIONS



## BEAM PATTERNS (PAIR)



### HYBRID FLOOD



## LIGHTS COME WITH

- Mounting Hardware
- Adjustable Tube Clamp
- 3-Wire Open Leads, No Connector
- Comes as a Pair (Left Side & Right Side)

## SPECIFICATIONS




MOUNT	BLACK PAIR	WT. (LBS.)	WATTS	AMP DRAW @14VDC	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
SM	64011	3.15	33	2.3	3775	43	66	131	4300

SPECIFICATIONS ARE DISPLAYED PER SINGLE LIGHT

# IGNITE™

The RIGID Ignite™ is the smallest, most versatile forward projecting light in RIGID's product line! Measuring approximately 1.4" x 1.4" x 2", this flexible light packs 1000 raw lumens using Spot, Flood or Diffused beam patterns; perfect for any application where short range light output is needed. The Ignite utilizes a Go-Pro® style mounting bracket which mates with an array of off the shelf Go-Pro mounts. Due to the wide range of mounting options, the Ignite's applications are almost limitless. The compact and lightweight housing makes the Ignite a great choice for auxiliary lighting on cars and trucks, motorcycles, UTVs, and even marine applications. Low current draw (less than 1 amp) and voltage requirements (7-28 volts) makes the Ignite adaptable to any application. Single light kits include one Ignite, mounting brackets, and related hardware. GoPro Mount Not Included.

RIGID Ignite lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

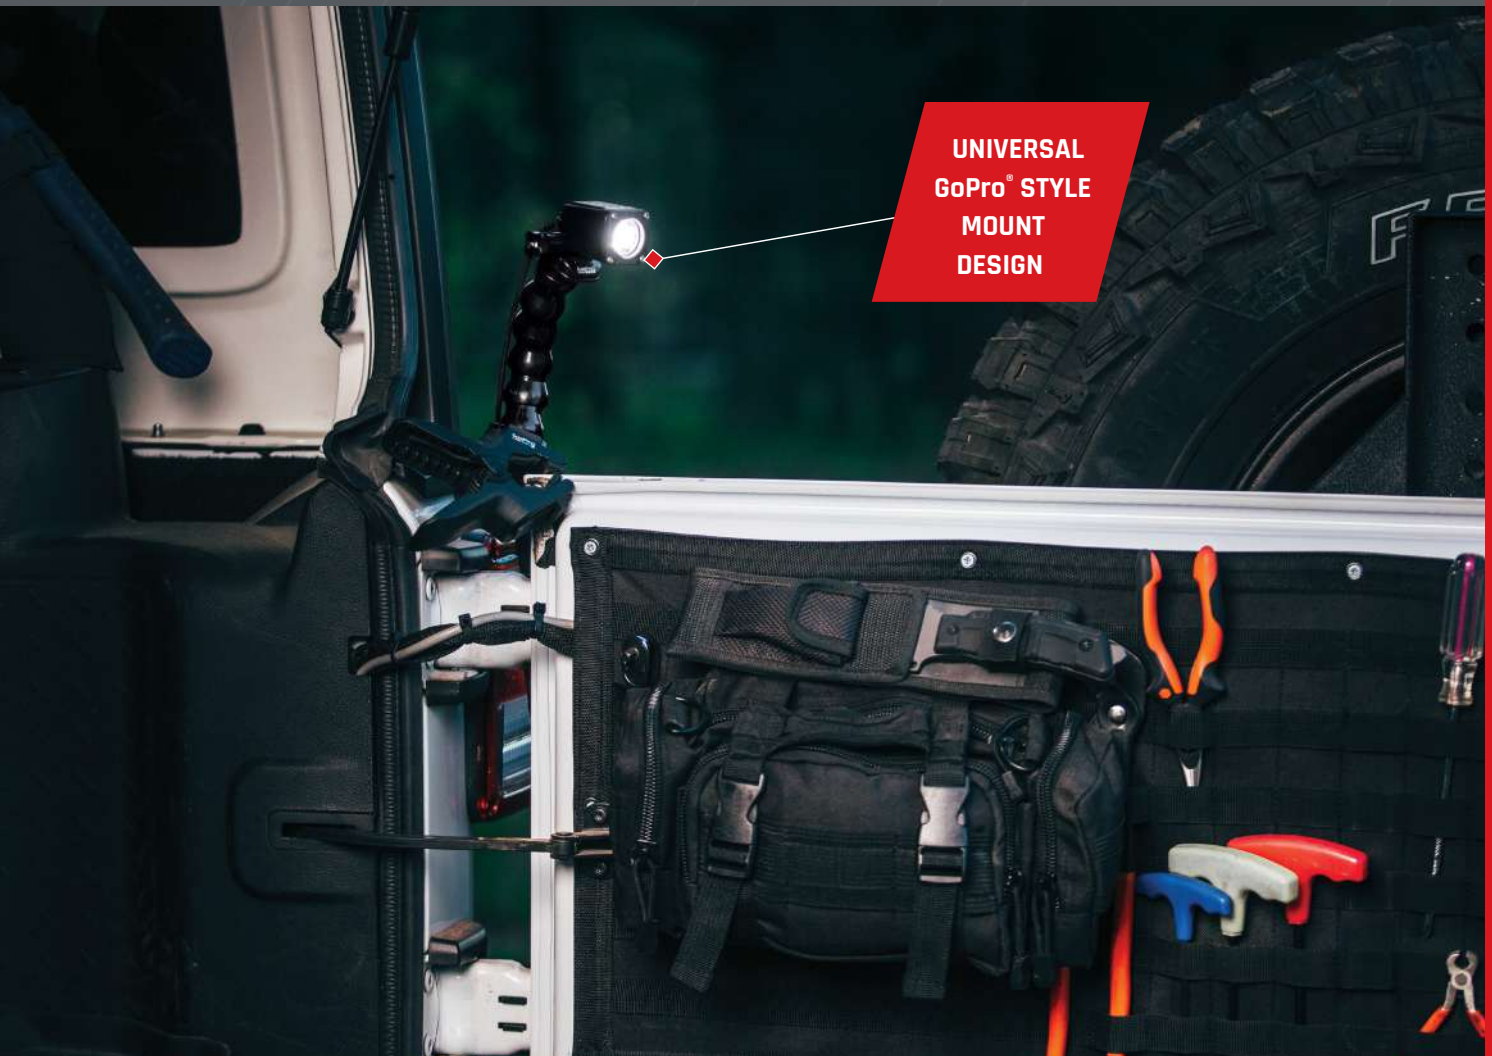

**UNIVERSAL  
GoPro® STYLE  
MOUNT  
DESIGN**





## FEATURES



- 50,000+ Hour Lifespan
- 7-24 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mount Included (Surface Mount Only)
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Surface Mount; Mates To Any Go-Pro® Case Mount
- Universal Go-Pro-Style Mount Design
- 2-Wire Open Lead for any 7-24 V DC Application

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### FLUSH MOUNT



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS


Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### FLOOD DIFFUSED


Flood optic behind diffused lens



### FLOOD



### SPOT

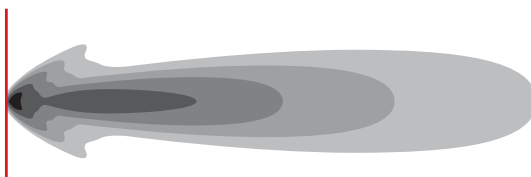

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK SINGLE	BLACK PAIR	WHITE SINGLE	WHITE PAIR	WT. (LBS.)	WATTS	AMP DRAW @14VDC	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
FLOOD DIFFUSED	SM	20531	-	60531	-	3.8	12	0.85	1	1000	9	29	60	885
	FM	20631	-	60631	-	3.8	12	0.85	1	1000	9	29	60	885
FLOOD	SM	20521	-	60521	-	3.8	12	0.85	1	1000	18	42	80	1786
	FM	20621	-	60621	-	3.8	12	0.85	1	1000	18	42	80	1786
SPOT	SM	20511	-	60511	-	3.8	12	0.85	1	1000	139	118	236	13939
	FM	20611	-	60611	-	3.8	12	0.85	1	1000	139	118	236	13939

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount



MATES  
WITH AN  
ARRAY  
OF MOUNTS



## LIGHTS COME WITH

- Mounting Hardware
- Black or White Mount (Surface Only)
- 2-Wire Open Leads, No Connector



# MIDNIGHT EDITION™ PRO

It's all about stealth with RIGID's new Midnight Optics. Utilizing our exclusive Spot Optic with a translucent black enamel coating, our Midnight Optics take the subtle "blacked out" look seriously; featuring black oxide hardware, to dark grey screen-printed and black embossed logos on the bezel. Midnight Optics enable RIGID to "disappear" during the day while still providing powerful LED technology to light up the night. Thanks to improved LED technology, the Midnight Edition PRO now offers more light output than ever before. Midnight Optics are available in E-Series PRO, RDS-Series PRO, SR-Series PRO, SR-M Series PRO, SR-Q SERIES PRO, and D-Series PRO product lines.



**LEGACY  
PRODUCTS  
WITH A DARK  
TWIST**





## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Some Sizes Excluded)
- Translucent Black Enamel on our Patented Spot Optics
- All Black Assembly Hardware
- Special Black Polymer Coated Circuit Board
- Available in RDS-Series, E-Series, SR-Series, SR-M Series, SR-Q Series, and D-Series Lights



FOR DIMENSIONS,  
REFER TO THE  
FOLLOWING SERIES

RDS-Series Pro  
E-Series Pro  
SR-Series Pro  
D-Series Pro  
SR-M Series Pro  
SR-Q Series Pro

**MIDNIGHT  
EDITION  
SR-M SERIES PRO**



**MIDNIGHT  
EDITION  
SR-Q SERIES PRO**



**MIDNIGHT  
EDITION  
D-SERIES PRO**



## DIMENSIONS



### MIDNIGHT EDITION RDS-SERIES PRO



### MIDNIGHT EDITION E-SERIES PRO



### MIDNIGHT EDITION SR-SERIES PRO



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


### SPOT BLACK OPTIC



### SPOT BLACK OPTIC For RDS-Series PRO

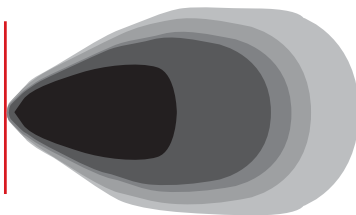

### SPOT DIFFUSED





HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	SIZE	BLACK PART NO.	PAIR PART NO.	WT. (LBS.)	WATTS	AMP DRAW @14VDC	LEDs	*New Pro RAW LUMENS	*Original RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>D-SERIES PRO SPOT</b>	SM	201213BLK	202213BLK	1.10	22	1.5	4	2508	1568	448	211	423	44839
	FM	211213BLK	212213BLK	1.17	22	1.5	4	2508	1568	448	211	423	44839
<b>D-SERIES PRO SPOT DIFFUSED</b>	SM	-	202513BLK	1.1	30	2.1	4	1411	-	9.13	30.2	60.4	913
	FM	-	212513BLK	1.17	30	2.1	4	1411	-	9.13	30.2	60.4	913
<b>SR-M SERIES PRO SPOT DIFFUSED</b>	SM	-	902513BLK	0.476	10	0.7	2	705.6	-	11.8	34.4	68.7	1180
	FM	-	922513BLK	0.588	10	0.7	2	705.6	-	11.8	34.4	68.7	1180
<b>SR-Q SERIES PRO SPOT DIFFUSED</b>	SM	-	905513BLK	0.75	29	2.1	4	1411	-	12	34.7	69.3	1202
	FM	-	925513BLK	0.90	29	2.1	4	1411	-	12	34.7	69.3	1202
<b>E-SERIES PRO SPOT</b>	4"	104213BLK	-	2.01	56	4.36	8	6336	3000	803	283	566	80301
	6"	106213BLK	-	2.84	89	6.36	12	9504	4500	1308	361	723	130841
	10"	110213BLK	-	4.12	183	13.07	20	15840	5740	2109	459	918	210947
	20"	120213BLK	-	6.10	214	15.3	40	25080	9200	3340	578	1156	334029
	30"	130213BLK	-	8.78	311	22.2	60	32700	13800	4154	640	1280	415413
	40"	140213BLK	-	10.84	299	21.4	80	35680	18400	4219	650	1299	421872
	50"	150213BLK	-	13.84	377	26.9	100	44600	23000	5864	766	1532	586474
<b>SR-SERIES PRO SPOT</b>	6"	906213BLK	-	1.07	48	3.43	6	4752	2250	598	244	489	59839
	10"	910213BLK	-	1.72	61	4.36	10	7920	3750	819	286	572	81959
	20"	920214BLK	-	3.6	118	8.4	20	15840	7500	1450	381	762	145006
	30"	930214BLK	-	5.4	160	11.4	30	18810	11250	2081	456	912	208052
	40"	940214BLK	-	7.04	259	18.5	40	25080	15000	2711	521	1041	271099
	50"	950214BLK	-	8.55	290	20.7	50	31350	18750	3341	578	1156	334145
<b>RDS-SERIES PRO SPOT</b>	20"	882213BLK		6.6	234	16.72	40	31680	10460				
	30"	883213BLK		9.2	277	19.8	60	47520	15690				
	40"	884213BLK		12	314	22.44	80	63360	20920				
	50"	885213BLK		18.25	393	28.05	100	79200	26150				
	54"	886213BLK		20	453	32.34	108	85538	28242				

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.




## LIGHTS COME WITH

- See RDS-SERIES PRO
- See E-SERIES PRO
- See SR-SERIES PRO
- See D-SERIES PRO
- See SR-Q SERIES PRO
- See SR-M SERIES PRO

# RIGID INDUSTRIES CAPTURE®

The RIGID Capture® is the world's only LED light with an integrated GoPro® charging system. The Capture combines a powerful light source with a docking station for GoPro® Hero 3+ or 4. High and low light output options provide just the right amount of light for any filming situation. The Capture also features an optimized light output and beam pattern for the GoPro® camera's field of view area with RIGID's patented radius housing and a lenticular lens design. The custom high quality Carling® switches provide a solid feel and clean look in your vehicle, while the amber lens covers will help your vision and video in adverse conditions. The Capture enables you to record your favorite on- or off-road excursions day or night.

## LIGHT COMES WITH

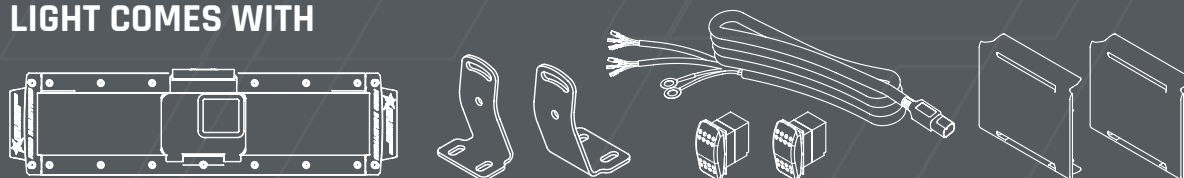

GoPro® Not Included.





**RECORD.  
REVEAL.  
RELIVE.™**



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Black Housing Only)

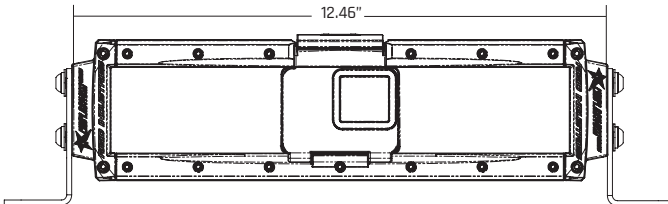

## DIMENSIONS

ALL HOUSINGS AVAILABLE IN WHITE



## LIGHTS COME WITH

- Mounting Hardware
- Wiring Harness
- 2 Carling Switches
- 2 Carling Switch Bezels
- 2 - 4" Amber Light Covers
- GoPro® NOT INCLUDED

### BLACK HOUSING ONLY

- 2 Black Powder Coated, L-Shape Brackets


### WHITE HOUSING ONLY

- 2 Stainless Steel, L-Shape Brackets

## BEAM PATTERN



### LENTICULAR



## SPECIFICATIONS



A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

### Capture

	BLACK	WHITE	MODE	LEDS	WATTS	AMP DRAW @ 14VDC	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(CD)
	88100	88103	HIGH	16	63	4.38	5880	82	91	181	8184
			LOW	16	13	.90	1176	24	49	98	2379



Made to be used with GoPro®  
Hero 3+ or 4 camera. GoPro®  
Not included.

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.

# RDS-SERIES<sup>®</sup> PRO

RIGID revolutionized the lighting industry with the introduction of the RDS-Series, and recent advancements in LED technology have made them more powerful than ever before with the RDS-Series PRO. With an improved output of 85,538 raw lumens, the RDS-Series PRO projects more usable light exactly where it's needed on the road ahead. By taking an E-Series light bar and treating it to a gentle arc, the patented RDS-Series PRO provides a sleek, integrated look with the curved windshields and bumpers on today's trucks and SUVs. The curve is for more than just looks, it is also functional: the arc of the RDS-Series PRO light bars provides a wider spread of LED light, providing unmatched lighting coverage with a single light bar. RDS-Series PRO also includes updated branding and blacked-out circuit boards for a more refined look.



**CURVE YOUR  
EXCITEMENT.**








## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

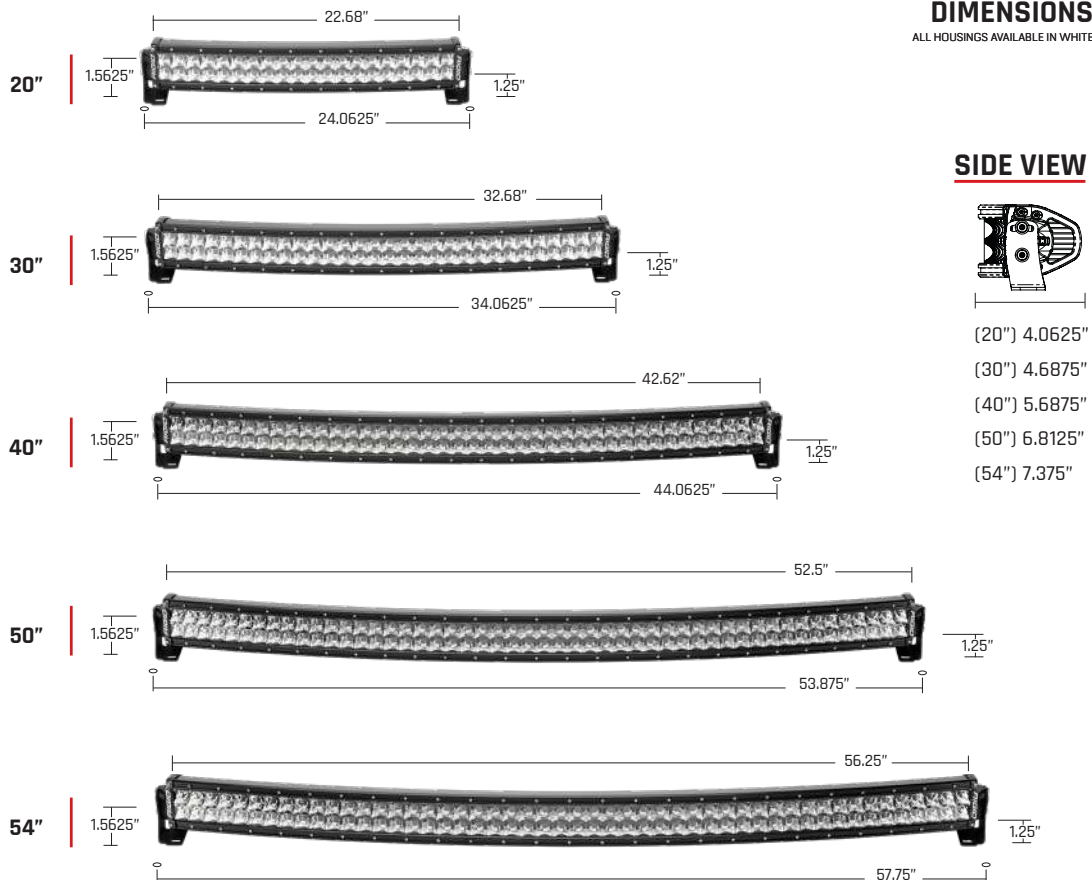

WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS & RDS PATENTED TECHNOLOGY

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.



The RDS Output Technology™  
(U.S. Patent No. D713,574 & U.S. Patent No. 6,986,593)

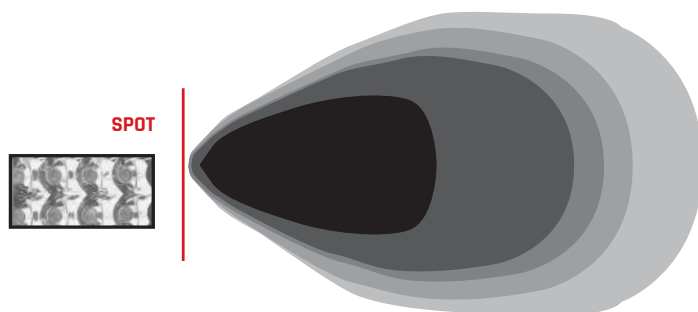

HOW MUCH  
OUTPUT DO  
I NEED?

SPECIFICATIONS



SPOT

SIZE	BLACK PART NO.	WHITE PART NO.	WT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS
20"	882213	872213	6.31	234	16.72	40	31680	10460
30"	883213	873213	8.99	277	19.8	60	47520	15690
40"	884213	874213	12.40	314	22.44	80	63360	20920
50"	885213	875213	14.26	393	28.05	100	79200	26150
54"	886213	876213	16.07	453	32.34	108	85538	28242

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



LIGHTS COME WITH

BLACK HOUSING ONLY

- 2 Black Powder Coated, L-shape brackets
- Open Leads, No Connector
- Harness w/Switch

WHITE HOUSING ONLY

- 2 Stainless Steel, L-shape brackets
- Open Leads, No Connector
- Harness w/Switch




# E-SERIES<sup>®</sup> PRO

The E-Series PRO is one of RIGID's most versatile, all-around lighting solutions, and recent enhancements in LED technology mean greater light output than ever before with the E-Series PRO. Among RIGID's most popular product lines, the E-Series PRO has recently benefited from several upgrades to improve both looks and performance. Plus, new branding and new blacked-out circuit boards give the E-Series PRO a more refined look. Available with your choice of optics, the E-Series PRO features a host of beam options, including Spot, Flood, Driving, Hyperspot, Diffused, and new Driving/Spot and Spot/Hyperspot combinations. These and other innovations make it one of the brightest and most efficient LED light bars on the market. The E-Series PRO was born in off-road, but its versatility makes it well suited for use with power sports, marine, general automotive and even first responder applications.




THE LIGHT  
THAT STARTED  
IT ALL



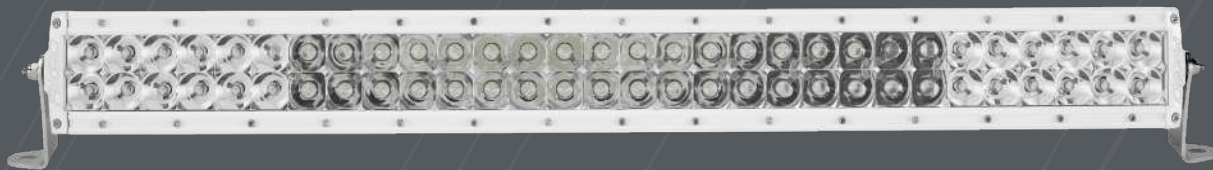








## FEATURES

- 50,000+ Hour Lifespan
- 9-36 V DC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)



## DIMENSIONS

ALL HOUSINGS AVAILABLE IN WHITE

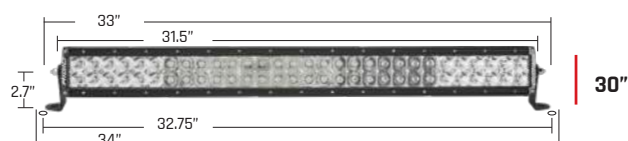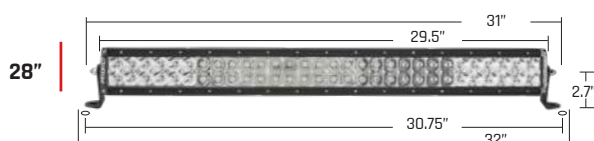


WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens




**FLOOD**



**DRIVING DIFFUSED**  
Driving optic behind diffused lens



**DRIVING**




**SPOT**





**HYPERSPOT**



**SPOT/FLOOD  
COMBO**



**SPOT/DRIVING  
COMBO**

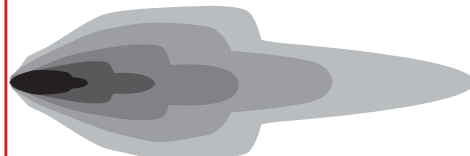

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



OPTIC	SIZE	BLACK PART NO.	WHITE PART NO.	WT (LBS.)	WATTS	AMP DRAW @14VDC	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
FLOOD DIFFUSED	4"	104513	804513	2	61	4.36	8	6336	3000	28	53	106	2792
	6"	106513	806513	2.84	81	5.79	12	9504	4500	43	65	131	4271
	10"	110513	810513	4.12	172	12.29	20	15840	5740	72	85	170	7204
DRIVING DIFFUSED	4"	173513	893513	2	92	6.57	12	9504	4500	55	75	150	5601
	6"	175513	895513	2.84	153	10.93	18	14256	6750	82	90	181	8158
	10"	178513	898513	4.12	206	14.71	30	18810	9000	108	104	208	10807
FLOOD	4"	104113	804113	2	61	4.36	8	6336	3000	128	113	226	12815
	6"	106113	806113	2.84	80	5.71	12	9504	4500	166	129	258	16616
	10"	110113	810113	4.12	185	13.21	20	15840	5740	286	169	338	28575
	20"	120113	820113	6.1	214	15	40	25080	9200	497	223	446	49730
	30"	130113	830113	8.78	311	22	60	32700	13800	699	264	529	69871
	40"	140113	840113	10.84	299	21	80	35680	18400	789	281	562	78935
	50"	150113	850113	13.84	377	27	100	44600	23000	914	302	605	91415
DRIVING	4"	173613	893613	2	90	6.43	12	9504	4500	546	234	467	54558
	6"	175613	895613	2.84	160	11.43	18	14256	6750	828	288	575	82750
	10"	178613	898613	4.12	204	14.57	30	18810	9000	960	310	620	96028
	20"	121613	822613	6.1	340	24.3	60	47520	18000	2132	462	924	213244
SPOT	4"	104213	804213	2	61	4.36	8	6336	3000	1396	374	747	139654
	6"	106213	806213	2.84	85	6.07	12	9504	4500	2131	462	923	213058
	10"	110213	810213	4.12	168	12	20	15840	5740	3358	580	1160	335779
SPOT/ HYPERSPOT	20"	120213	820213	6.1	156	11	40	20344	9200	5690	754	1509	569046
	30"	130213	830213	8.78	305	22	60	26708	13800	8520	923	1846	851983
	40"	140213	840213	10.84	306	22	80	31080	18400	9592	979	1959	959190
	50"	150213	850213	13.84	373	27	100	38620	23000	9895	995	1989	989518
HYPERSPOT	4"	173713	-	2	40	2.90	8	-	3520	1920	438	876	192000
	6"	175713	-	2.84	60	4.35	12	-	5280	2920	540	1081	292000
	10"	178713	-	4.12	75	5.43	20	-	7500	3880	623	1246	388000
	20"	121713	-	6.15	150	10.9	40	-	15000	7820	884	1769	782000
SPOT/FLOOD COMBO	6"	106313	806313	2.84	82	5.86	12	9504	6900	829	288	576	82863
	10"	110313	810313	4.12	165	11.79	20	15840	5740	2003	448	895	200267
	20"	120313	820313	6.1	214	15	40	25080	9200	3898	624	1249	389784
	28"	128313	-	7.5	243	17	56	30520	12880	4219	650	1299	421893
	30"	130313	830313	8.78	311	22	60	32700	13800	4746	689	1378	474648
	38"	138313	-	9.65	360	26	76	33896	17480	4929	702	1404	492876
	40"	140313	840313	10.84	299	21	80	35680	18400	5134	716	1433	513412
	50"	150313	850313	13.84	377	27	100	44600	23000	6308	794	1589	630822
SPOT/ DRIVING COMBO	10"	178313	-	4.12	174	12.43	24	19008	-	2285	478	956	228502
	20"	122313	-	6.1	319	23	44	34848	-	5480	740	1481	548042
	28"	127313	-	7.5	355	25	64	34880	-	5758	759	1518	575786
	30"	132313	-	8.78	470	34	68	37060	-	5932	770	1540	593163
	38"	137313	-	9.65	365	26	88	39248	-	6808	825	1650	680841
	40"	142313	-	10.84	370	30	92	41032	-	7127	844	1688	712687
	50"	152313	-	13.84	448	32	112	49952	-	7537	868	1736	753666

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



## LIGHTS COME WITH

### BLACK HOUSING ONLY

- 2 Black Powder Coated, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

### WHITE HOUSING ONLY

- 2 Stainless Steel, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

# SR-SERIES<sup>®</sup> PRO

The SR-Series PRO LED Light Bars provide a sleek, low profile lighting solution that measures less than 2" tall. Thanks to improved LED technology, the SR-Series PRO now offers more light output than ever before. As the name implies, the SR-Series PRO utilizes a single row of LEDs with your choice of optics in a variety of beam patterns. Ideal for applications where space is limited, the SR-Series PRO is a powerful light source designed to project light at extreme distances while consuming very little power. Available in a wide range of lengths and configurations, these LED light bars can be used on virtually any application, whether it's an off-road vehicle, industrial, agricultural, or marine.

RIGID's SR-Series PRO lights utilize extruded aluminum housings and are available with either a black or white durable powder coated finish. Along with improved LEDs for more output, the SR-Series PRO benefits from new branding and blacked-out circuit boards for a more refined look. They feature the same superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**LOW PROFILE  
LIGHTING  
SOLUTION**








## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- 2 Mounting Brackets Included (1" and 3")
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)



## DIMENSIONS

ALL HOUSINGS AVAILABLE IN WHITE

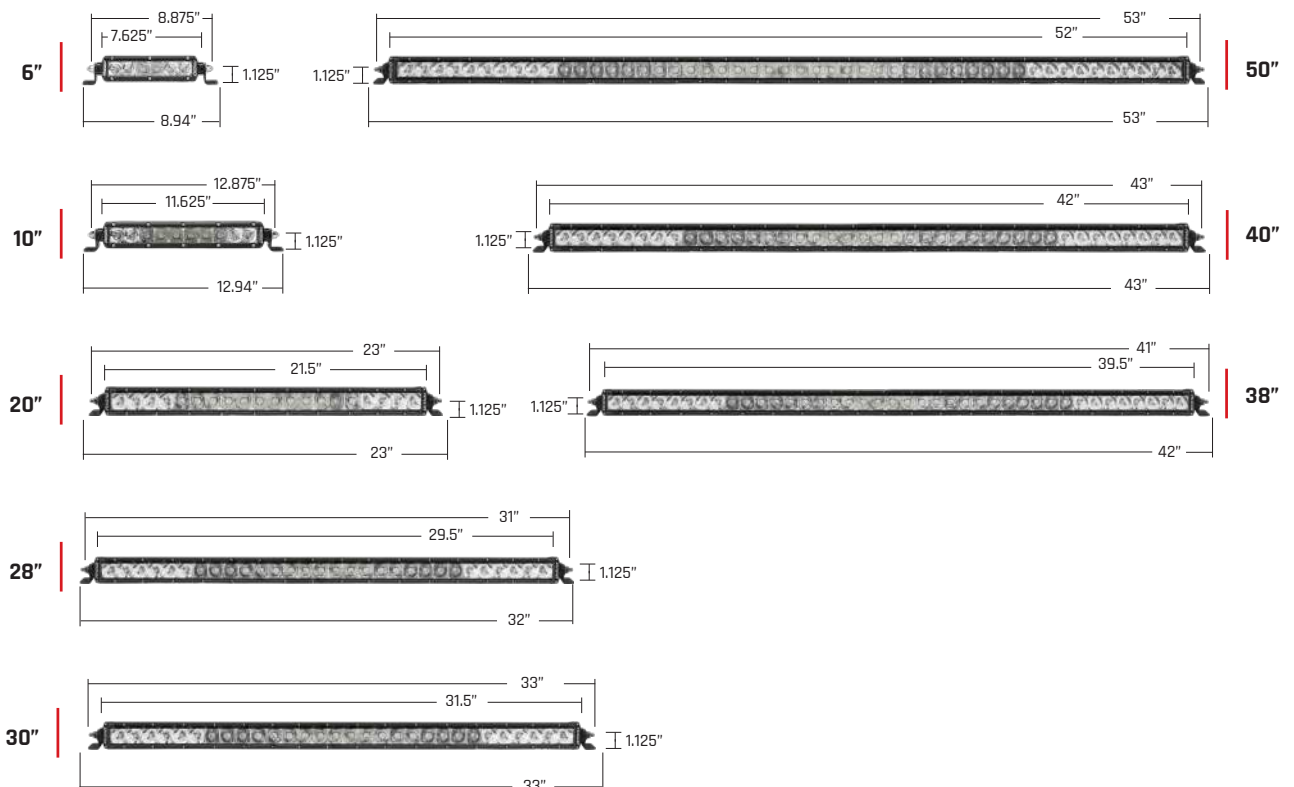


WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens




**DRIVING DIFFUSED**  
Driving optic behind diffused lens



**FLOOD**



**DRIVING**



**SPOT**




**HYPERSPOT**



**SPOT/  
FLOOD COMBO**



**SPOT/DRIVING  
COMBO**

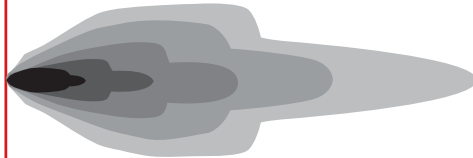

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	SIZE	BLACK PART NO.	WHITE PART NO.	WT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
FLOOD DIFFUSED	6"	906513	306513	1.07	47	3.36	6	4752	2250	21	46	92	2126
	10"	910513	310513	1.72	60	4.29	10	7920	3750	32	57	114	3284
DRIVING DIFFUSED	6"	906693	306693	1.07	69	4.93	9	7128	3375	42	65	130	4191
	10"	910693	310693	1.72	84	6.00	15	7524	5625	57	75	151	5751
FLOOD	6"	906113	306113	1.07	47	3.36	6	4752	2250	103	101	203	10262
	10"	910113	310113	1.72	60	4.29	10	7920	3750	161	127	254	16143
DRIVING	6"	906613	306613	1.07	69	4.93	9	7128	3375	434	208	417	43409
	10"	910613	310613	1.72	84	6.00	15	7524	5625	593	243	487	59358
	20"	921614	-	3.62	123	8.88	30	23760	11250	1127	336	671	112662
SPOT	6"	906213	306213	1.07	47	3.36	6	4752	2250	1110	333	666	111004
	10"	910213	310213	1.72	60	4.29	10	7920	3750	1784	422	845	178368
HYPERSPOT	6"	909713	-	1.07	30.4	2.2	6	-	2640	1310	362	724	131000
	10"	911713	-	1.72	35.9	2.6	10	-	3750	1909	438	875	192000
SPOT/FLOOD COMBO	6"	906313	306313	1.07	47	3.36	6	4752	2250	443	211	421	44329
	10"	910313	310313	1.72	60	4.29	10	7920	3750	1123	335	670	112340
	20"	920314	320314	3.62	119	8.5	20	15840	7500	1989	446	892	198854
	28"	928314	-	5.1	164	11.81	28	17556	-	2612	511	1022	261180
	30"	930314	330314	5.42	160	11.42	30	18810	11250	2968	545	1090	296841
	38"	938314	-	6.7	38	16.35	38	23826	-	3638	603	1206	1206
	40"	940314	340314	7.04	259	18.5	40	25080	15000	3772	614	1228	377168
	50"	950314	350314	8.55	290	21	50	31350	18750	4347	659	1319	434698
SPOT/ DRIVING COMBO	10"	911313	-	1.72	50	3.57	12	9504	-	904	300	601	90475
	20"	921314	-	3.62	132	9.42	22	17424	-	3053	553	892	305299
	30"	931314	-	5.42	205	14.64	34	21318	-	3802	617	1233	380181
	40"	941314	-	7.04	303	21.64	46	28842	-	4653	682	1364	465325
	50"	951314	-	8.55	334	23.85	56	35112	-	5881	767	1534	588120
SPOT/ HYPERSPOT COMBO	20"	920214	-	3.62	132	9.42	20	10170	-	3053	553	1105	305299
	30"	930214	-	5.42	126	9	30	11758	-	3842	620	1240	384234

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



## LIGHTS COME WITH

### BLACK HOUSING ONLY

- 2-1", 2-3" Black Powder Coated, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

### WHITE HOUSING ONLY

- 2-1", 2-3" Stainless Steel, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

# D-SERIES<sup>®</sup> PRO

The D-Series PRO has always been the most versatile compact lighting package on the market today. RIGID has just made it professional grade with the D-Series PRO, which offers more light output than ever before thanks to recent advancements in LED technology. Available with a variety of mounting options, including surface, flush, or heavy-duty, the D-Series PRO can be utilized for virtually any lighting application. Measuring just 3" x 3", the D-Series PRO packs a powerful punch up to 4,752 lumens depending on the optics chosen. Customers have used these versatile lights for reverse lights on a truck, a handlebar light for a motorcycle, flood lighting for a trailer, auxiliary lighting on agriculture and mining equipment, and many other applications that require a powerful, efficient light in a small space.

RIGID's D-Series PRO lights are available with either a black or white durable powder coated finish, and recent updates to the D-Series PRO include new branding and blacked-out circuit boards for a more refined look. They feature the same superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

**ADDITIONAL  
VEHICLE SPECIFIC  
MOUNTS SOLD  
SEPARATELY**







## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



FLUSH AND SURFACE MOUNT AVAILABLE IN WHITE





### SURFACE MOUNT



### FLUSH MOUNT



### HEAVY DUTY MOUNT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens




**FLOOD**




**DRIVING DIFFUSED**  
Driving optic behind diffused lens




**DRIVING**



**SPOT**

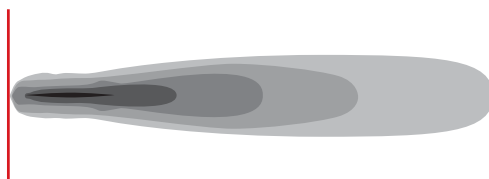

**HYPERSPOT**

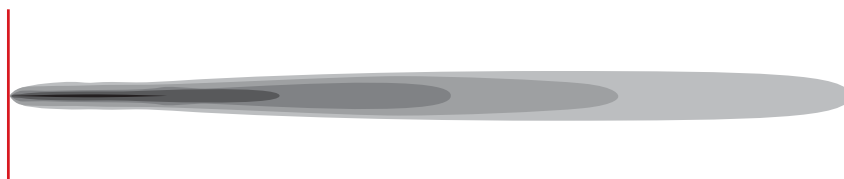

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK SINGLE	BLACK PAIR	WHITE SINGLE	WHITE PAIR	WT. (LBS.)	WATTS	AMP DRAW @14VDC	LEDs	* NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
FLOOD DIFFUSED	SM	201513	202513	601513	602513	1.1	30	2.14	4	3168	1568	20	45	90	2060
	FM	211513	212513	611513	612513	1.17	30	2.14	4	3168	1568	20	45	90	2060
	HD	221513	222513	-	-	1.40	30	2.14	4	3168	1568	20	45	90	2060
DRIVING DIFFUSED	SM	501513	502513	701513	702513	1.1	44	3.14	6	4752	3096	29	53	107	2909
	FM	511513	512513	711513	712513	1.17	44	3.14	6	4752	3096	29	53	107	2909
	HD	521513	522513	-	-	1.40	44	3.14	6	4752	3096	29	53	107	2909
FLOOD	SM	201113	202113	601113	602113	1.1	30	2.14	4	3168	1568	58	76	152	5819
	FM	211113	212113	611113	612113	1.17	30	2.14	4	3168	1568	58	76	152	5819
	HD	221113	222113	-	-	1.40	30	2.14	4	3168	1568	58	76	152	5819
DRIVING	SM	501313	502313	701313	702313	1.1	44	3.14	6	4752	3096	231	152	304	23148
	FM	511313	512313	711313	712313	1.17	44	3.14	6	4752	3096	231	152	304	23148
	HD	521313	522313	-	-	1.40	44	3.14	6	4752	3096	231	152	304	23148
SPOT	SM	201213	202213	601213	602213	1.1	30	2.14	4	3168	1568	721	268	537	72197
	FM	211213	212213	611213	612213	1.17	30	2.14	4	3168	1568	721	268	537	72197
	HD	221213	222213	-	-	1.40	30	2.14	4	3168	1568	721	268	537	72197
HYPERSPOT	SM	503713	504713	-	-	1.15	30	2.14	4	1760	1760	794	281	563	79456

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount, (HD) = All Black Heavy Duty



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Vibration Isolators (Heavy Duty Surface Only)
- Harness w/Switch
- Deutsch Connector

# D-XL<sup>TM</sup> PRO

With the enormous popularity of the original D-Series came the need for a slightly larger, more powerful lighting solution. The RIGID D-XL PRO boasts more light than ever before in a housing that measures 4"x4". Recent improvements to the LEDS in the D-XL Series PRO improve light output to up to 9,504 raw lumens while maintaining the efficiency that is the hallmark of the entire RIGID product line. Featuring an unbreakable polycarbonate lens, durable UV-resistant polyester powder coat, stainless steel hardware, and a vibration isolator, the D-XL Series PRO is available with your choice of beam pattern. Recent updates include new RIGID branding and blacked-out circuit boards for a more refined look. Whether it's off-road, power sports, general automotive, mining, agriculture, or fire and rescue, the D-XL PRO is perfect for any application that requires a high intensity LED light.

**INCREASED LIGHT  
OUTPUT WHILE  
MAINTAINING  
EFFICIENCY**







## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS

ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT

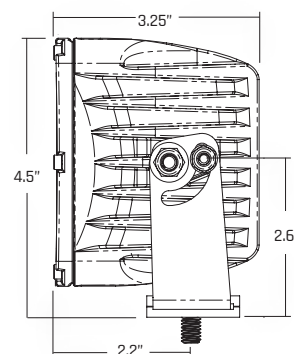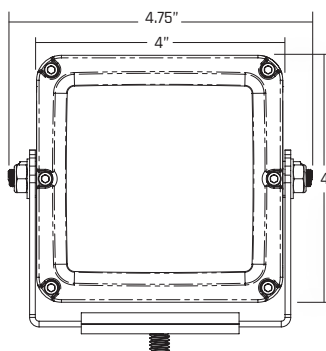

WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS


Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### FLOOD DIFFUSED

Flood optic behind diffused lens





### FLOOD




### DRIVING DIFFUSED


Driving optic behind diffused lens




### DRIVING



### SPOT

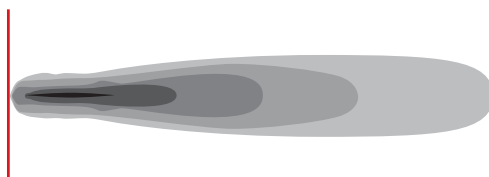

### HYPERSPOT

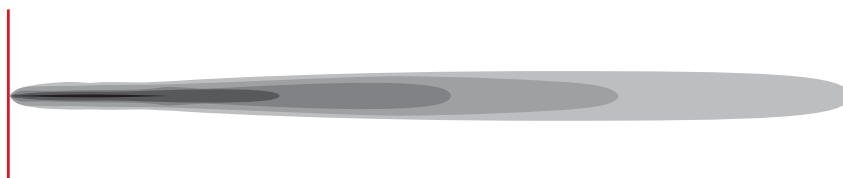

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK SINGLE	BLACK PAIR	WHITE SINGLE	WHITE PAIR	WT. (LBS.)	WATTS	AMP DRAW @ 14V	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>FLOOD DIFFUSED</b>	SM	321313	322313	323313	324313	1.81	67	4.79	9	7128	2646	40	63	126	3980
<b>DRIVING DIFFUSED</b>	SM	321713	322713	323713	324713	1.81	88	6.29	12	9504	3969	75	86	173	7454
<b>FLOOD</b>	SM	321113	322113	323113	324113	1.81	69	4.93	9	7128	2646	147	121	242	14681
<b>DRIVING</b>	SM	321613	322613	323613	324613	1.81	89	6.36	12	9504	3969	638	252	505	63841
<b>SPOT</b>	SM	321213	322213	323213	324213	1.81	68	4.86	9	7128	2646	1342	366	732	134226
<b>HYPERSPOT</b>	SM	321413	322413	-	-	1.81	33	2.29	9	-	2646	2081	456	912	208186

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Vibration Isolators
- Harness w/Switch
- Deutsch Connector

# Q-SERIES<sup>®</sup> PRO

The Q-Series PRO is designed and built to withstand the harshest working environments imaginable. Constructed of the toughest and most durable materials available, including a double-pass TIG-welded stainless steel bracket with vibration isolator, the Q-Series PRO provides reliable, powerful LED light and is tough enough to withstand mining, agriculture, construction, and the oil and gas industries. The rugged construction also makes it well suited to extreme environments. If the application is severe, the Q-Series PRO is the ultimate lighting solution.

RIGID's Q-Series PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

A photograph of two firefighters in full protective gear, including helmets and jackets, positioned on a yellow aerial ladder at night. They are working on a structure, and a bright, powerful LED light from a RIGID Q-Series PRO fixture is illuminating the scene. A red callout box with the text 'THE ULTIMATE LIGHTING SOLUTION' points to the light fixture. The background is dark, emphasizing the light's effectiveness in low-visibility conditions.

**THE ULTIMATE  
LIGHTING  
SOLUTION**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS

ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT

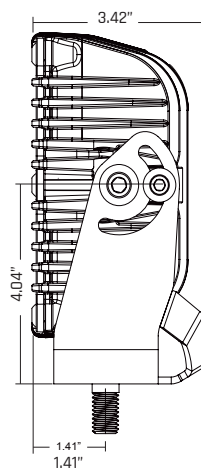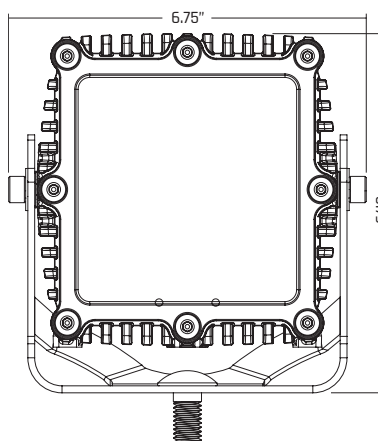

WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


### FLOOD DIFFUSED

Flood optic behind diffused lens




### DRIVING DIFFUSED

Driving optic behind diffused lens




### FLOOD




### DRIVING




### FLOOD/DIFFUSED COMBO



### SPOT/DIFFUSED COMBO




### DRIVING/DIFFUSED COMBO




SIDE VIEW - COMBO WITH DIFFUSED


### DRIVING/HYPERSPOT COMBO

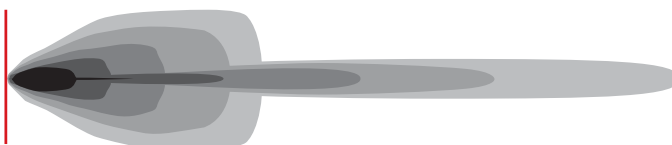

### SPOT



### HYPERSPOT



HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK SINGLE	WHITE SINGLE	WT. (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>FLOOD DIFFUSED</b>	SM	244513	245513	2.8	123	8.8	16	12672	7040	77	88	176	7737
<b>DRIVING DIFFUSED</b>	SM	544513	545513	2.8	195	13.9	24	19008	9000	111	105	210	11098
<b>FLOOD</b>	SM	244113	245113	2.8	123	8.8	16	12672	7040	329	181	362	32902
<b>DRIVING</b>	SM	544313	545313	2.8	195	13.9	24	19008	9000	1035	321	643	103531
<b>FLOOD/ DIFFUSED COMBO</b>	SM	244713	245713	2.8	123	8.8	16	12672	7040	196	140	280	19657
<b>SPOT/ DIFFUSED COMBO</b>	SM	244613	245613	2.8	123	8.8	16	12672	7040	1694	411	823	169403
<b>DRIVING/ DIFFUSED COMBO</b>	SM	544613	545613	2.8	195	13.9	24	19008	9000	445	211	422	44587
<b>DRIVING/ HYPERSPOT COMBO</b>	SM	544813	545813	2.8	175	12.5	20	12150	7500	2169	465	931	216975
<b>SPOT</b>	SM	244213	245213	2.8	123	8.8	16	12672	7040	3446	587	1174	344627
<b>HYPERSPOT</b>	SM	544713	-	2.8	80	5.7	16	-	7040	3280	573	1146	328000

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount




## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, Heavy Duty U-Shape Bracket
- Vibration Isolators
- Harness w/Switch
- Deutsch Connector

# SR-Q<sup>®</sup> PRO

The SR-Q Series PRO is a sleek low profile lighting option that packs more lighting output than ever before thanks to recent improvements to the advanced LEDs inside. The SR-Q Series PRO now emits up to 4,752 raw lumens, depending on optic. An excellent choice for any application where space is limited, the SR-Q Series PRO makes auxiliary lighting professional grade. A single row of LEDs and is available in multiple beam patterns, including Spot, Flood, Driving, Hyperspot, and Diffused; as well as being offered in UV. Other recent updates to the SR-Q Series PRO include updated RIGID branding and blacked out circuit boards for a more refined look. Both surface and flush mount options are available and there are multiple mounting capabilities, such as the Suction Cup Mount and Angled Flush Mounts, just to name a few. The SR-Q Series PRO is also a perfect back-up light and is available as a Back-Up Light Kit with a 25' harness and a three-position switch for ease of wiring and usage.

RIGID's SR-Q Series PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

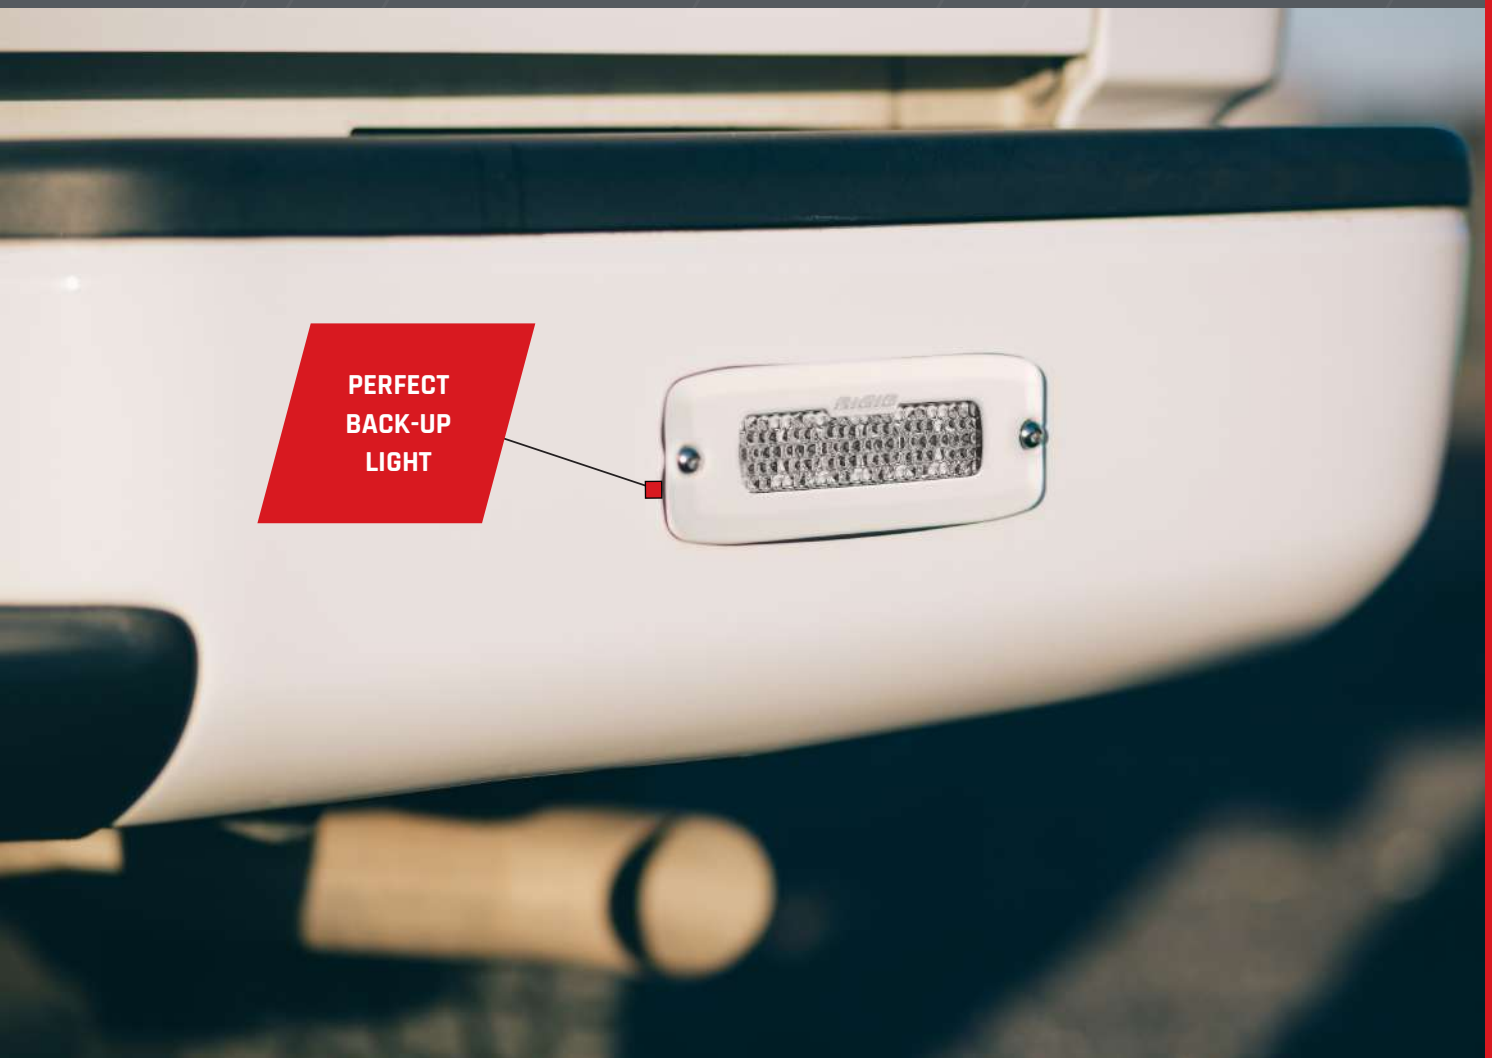





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### FLUSH MOUNT



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS


Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### FLOOD DIFFUSED

Flood optic behind diffused lens




### FLOOD




### DRIVING DIFFUSED


Driving optic behind diffused lens




### DRIVING



### SPOT

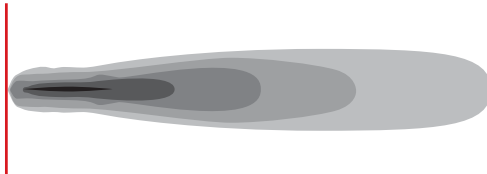

### HYPERSPOT

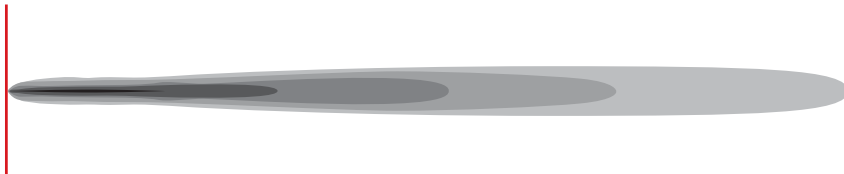

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK SINGLE	BLACK PAIR	WHITE SINGLE	WHITE PAIR	WT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDS	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY (cd)
<b>FLOOD DIFFUSED</b>	SM	904513	905513	944513	945513	.75	32	2.29	4	3168	1568	13	36	73	1338
	FM	924513	925513	964513	965513	.90	32	2.29	4	3168	1568	13	36	73	1338
<b>DRIVING DIFFUSED</b>	SM	914513	915513	954513	955513	.75	41	2.93	6	4752	3096	32	57	114	3286
	FM	934513	935513	974513	975513	.9	41	2.93	6	4752	3096	32	57	114	3286
<b>FLOOD</b>	SM	904113	905113	944113	945113	.75	32	2.29	4	3168	1568	69	83	166	6924
	FM	924113	925113	964113	965113	.9	32	2.29	4	3168	1568	69	83	166	6924
<b>DRIVING</b>	SM	914313	915313	954313	955313	.75	41	2.93	6	4752	3096	275	166	332	27599
	FM	934313	935313	974313	975313	.9	41	2.93	6	4752	3096	275	166	332	27599
<b>SPOT</b>	SM	904213	905213	944213	945213	.75	32	2.29	4	3168	1568	642	253	507	64287
	FM	924213	925213	964213	965213	.9	32	2.29	4	3168	1568	642	253	507	64287
<b>HYPERSPOT</b>	SM	916713	916813	-	-	.75	20	1.4	4		1760	930	305	610	93000
<b>UV DRIVING</b>	SM	916393	917393	-	-	.75	-	-	6	4800 milliwatts at 395 nanometers					
<b>UV DIFFUSED</b>	SM	916593	917593	-	-	.75	-	-	6	4800 milliwatts at 395 nanometers					

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Solid Black Light Cover (Excludes FM)
- Harness w/Switch
- Deutsch Connector

# SR-M<sup>®</sup>PRO

Among the smallest, most compact products that RIGID offers, the SR-M Series PRO (Single Row Mini) still packs a lot of lighting power with an impressive output up to 2,376 raw lumens thanks to improved LED technology. The size of SR-M Series PRO makes it highly adaptable to a variety of uses, including everything from a flood light on a toy hauler, handlebar-mounted lights for motorcycles and many other power sports applications. Common automotive uses include back bumper lighting. With a range of beam patterns in your choice of optics, the SR-M Series PRO is one of the brightest mini LED lights on the market. In addition to more powerful LEDs, recent updates include new branding and blacked-out circuit boards make the SR-M Series PRO more powerful and refined than ever before. They feature the same superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

RIGID's SR-M Series PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**HIGHLY  
ADAPTABLE  
TO A VARIETY  
OF USES**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### FLUSH MOUNT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens




**FLOOD**




**DRIVING DIFFUSED**  
Driving optic behind diffused lens



**DRIVING**



**SPOT**

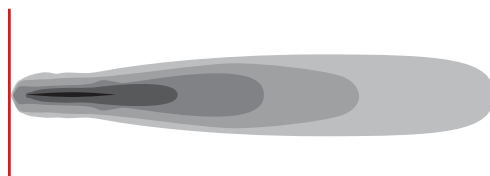

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK SINGLE	BLACK PAIR	WHITE SINGLE	WHITE PAIR	WT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDS	*NEW PRO RAW LUMENS	*ORIGINAL RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY (cd)
<b>FLOOD DIFFUSED</b>	SM	902513	-	942513	-	0.476	15	1.14	2	1584	880	18	43	86	1830
	FM	922513	-	962513	-	0.588	15	1.14	2	1584	880	18	43	86	1830
<b>DRIVING DIFFUSED</b>	SM	912513	-	952513	-	0.476	23	1.64	3	2376	1125	30	55	110	3029
	FM	932513	-	972513	-	0.588	23	1.64	3	2376	1125	30	55	110	3029
<b>FLOOD</b>	SM	902113	-	942113	-	0.476	15	1.07	2	1584	880	32	56	112	3160
	FM	922113	-	962113	-	0.588	15	1.07	2	1584	880	32	56	112	3160
<b>DRIVING</b>	SM	912313	-	952313	-	0.476	23	1.64	3	2376	1125	107	104	207	10738
	FM	932313	-	972313	-	0.588	23	1.64	3	2376	1125	107	104	207	10738
<b>SPOT</b>	SM	902213	-	942213	-	0.476	15	1.07	2	1584	880	346	186	372	34641
	FM	922213	-	962213	-	0.588	15	1.07	2	1584	880	346	186	372	34641
<b>UV DRIVING</b>	SM	91339	-	-	-	.38	-	-	3	2400 milliwatts at 395 nanometers					
<b>UV DIFFUSED</b>	SM	91359	-	-	-	.38	-	-	3	2400 milliwatts at 395 nanometers					

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount




## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Solid Black Light Cover (Excludes FM)
- Harness w/Switch
- Deutsch Connector

# A-SERIES®


The A-Series LED Accessory Light is the universal light that can be used just about anywhere. Vehicle cabs, boat cabins, work vehicle beds, under the hood of a vehicle and trunks are just a few of the places where the A-Series can provide handy bright lighting in otherwise dark environments. The A-Series has a durable compact aluminum housing and includes rubber flat-mount, 3M™ VHB™, 2 way pad for flat mounting, and radius tube-mount adapters, which provide side or bottom wire exits to accommodate different applications. It is lightweight, waterproof, and available in a variety of different LED colors in high and low power versions. The versatility of the A-Series makes it an easy installation on almost anything.

## COLOR SELECTION




COOL WHITE

• Cool White matches the kelvin of all other white LED lights.



WARM WHITE

• Warm White is comparable to a 60-watt incandescent light bulb



NATURAL WHITE

• Natural White is similar to being outside on a sunny day.



RED



BLUE




AMBER



GREEN

**MINIMUM  
SPACE.  
MAXIMUM  
POWER.**

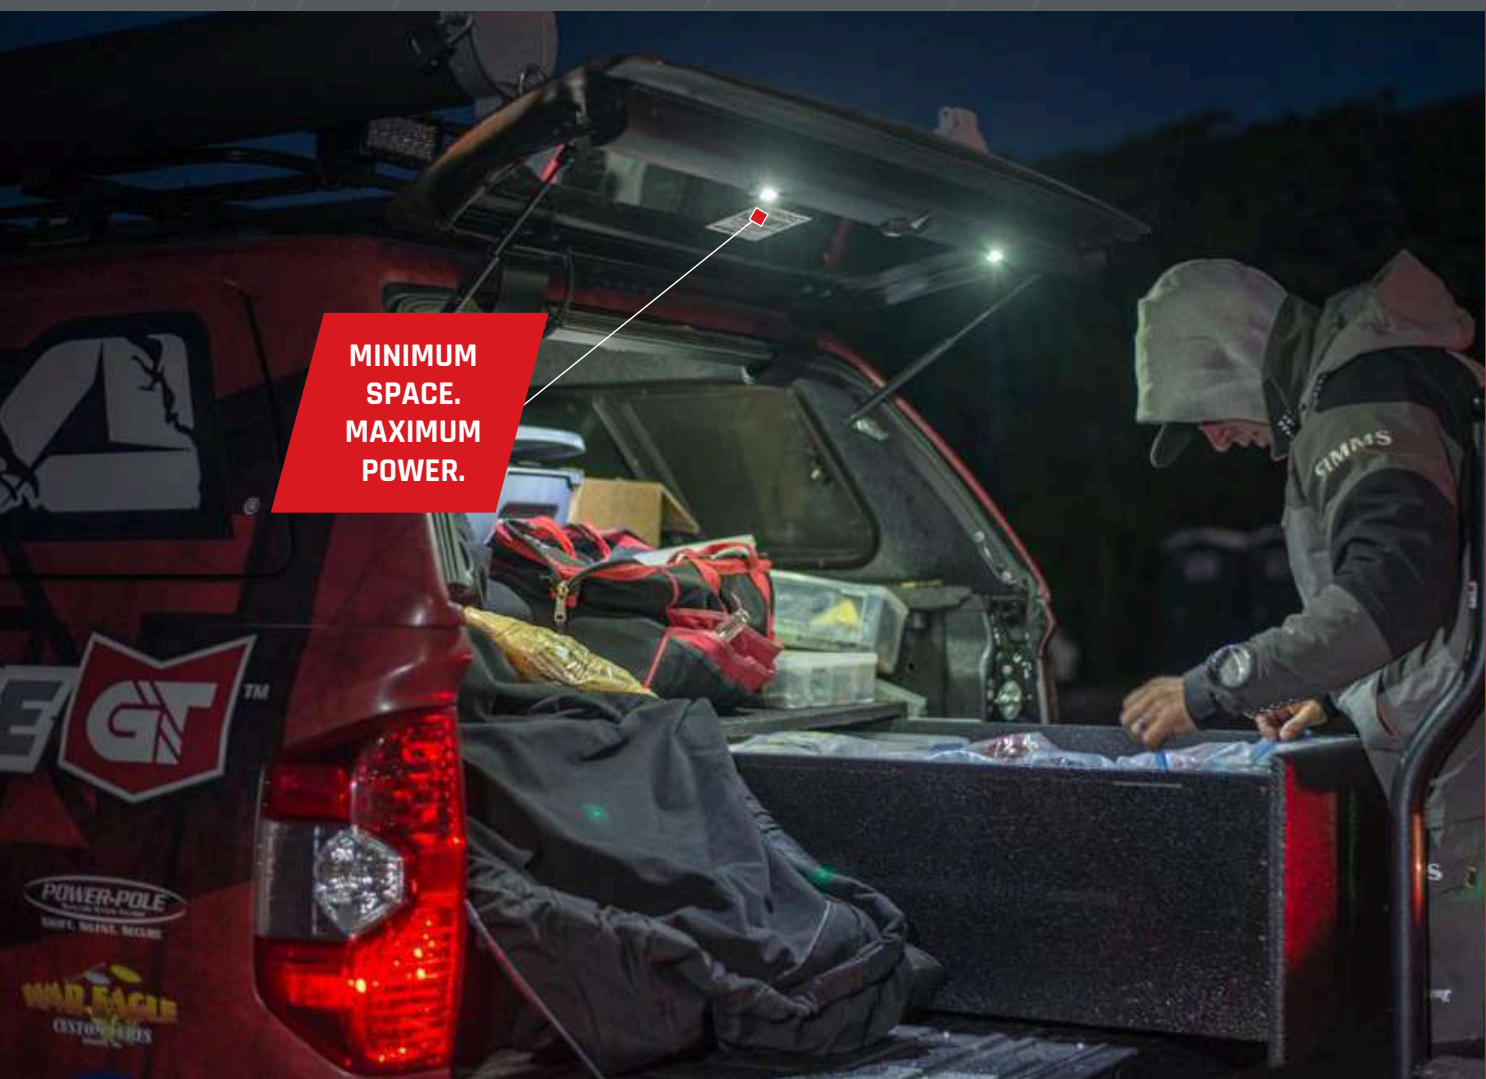



Triplex™ coating is three to five times stronger than MIL-A-8625, the military set specification for anodic coatings. Salt chamber testing exceeded 9,000 hours with zero pitting or corrosion.



TRIPLEX™



## FEATURES

- 50,000+ Hour Lifespan
- 10-28 VDC
- Durable UV Polyester Powder Coat
- 2-Wire Open Lead for Convenient Wiring
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP69k Compliant – Dust / Water Ingress
- Mount Adapters Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Epoxy Sealed, No Vent
- 24" Molded Wire Ingress



## LIGHTS COME WITH

- Mounting Hardware
- 2 Mounting Hole Rubber Plugs
- 1 Adhesive Primer
- 1 VHB Mount Tape
- 1 Flat Mount Adapter
- 1 Tube Mount Adapter
- 3ft. Wire Extension
- 2-Wire Open Lead, No Connector

### FLAT MOUNT



BOTTOM  
WIRE EXIT




SIDE  
WIRE EXIT

### TUBE MOUNT



SIDE OR BOTTOM  
WIRE EXIT

## DIMENSIONS & MOUNTS



\*Dimensions shown without adapter

## SPECIFICATIONS

		BLACK		WHITE		TRIPLEX™	
	LIGHT COLOR	SINGLE PART NO	PAIR PART NO.	SINGLE PART NO	PAIR PART NO	SINGLE PART NO	PAIR PART NO
LOW POWER	WARM WHITE	480013	482013	480133	482133	-	-
	NATURAL WHITE	480023	482023	480143	482143	-	-
	COOL WHITE	480033	482033	480153	482153	-	-
	RED	480043	482043	480163	482163	-	-
	BLUE	480053	482053	480173	482173	-	-
	GREEN	480063	482063	480183	482183	-	-
	AMBER	480343	482343	480323	482323	-	-
HIGH POWER	WARM WHITE	480073	482073	480193	482193	480253	482253
	NATURAL WHITE	480083	482083	480203	482203	480263	482263
	COOL WHITE	480093	482093	480213	482213	480273	482273
	RED	480103	482103	480223	482223	480283	482283
	BLUE	480113	482113	480233	482233	480293	482293
	GREEN	480123	482123	480243	482243	480303	482303
	AMBER	480333	482333	480313	482313	480353	482353

# R-SERIES 46™

RIGID entered the world of round lighting with the release of the R-Series 46, which combines innovative LED technology with the classic round shape of traditional auxiliary lighting. The R-Series 46 mirrors the size of the common Par 46 in size, making it easy to both utilize modern LED technology in common older applications, and also retrofit. RIGID leading technology into existing fixtures, such as police spotlights, tractor headlights, and other heavy machinery. The R-Series 46 provides a powerful beam of light and a 50,000 hour lifespan that is far superior to traditional incandescent bulbs, all while using a fraction of the power. The R-Series 46 is available with stand-alone surface mounting and as a direct-fit replacement for Par 46 bulbs.

RIGID's R-Series 46 lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

**THE WORLD  
OF ROUND JUST  
GOT RIGID**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### RETROFIT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

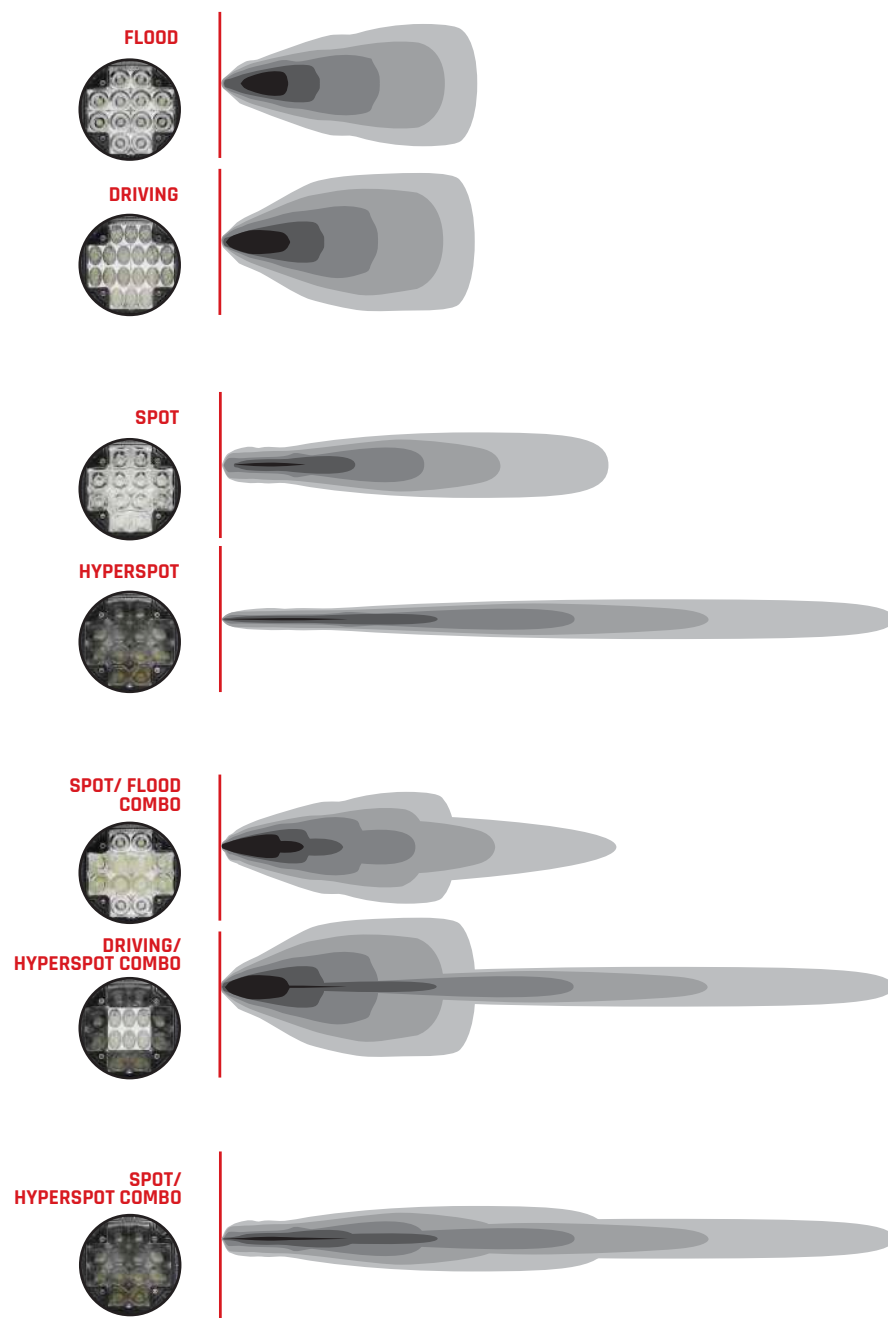



HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK SINGLE	BLACK PAIR	WHITE SINGLE	WHITE PAIR	WT (LBS.)	WATTS	AMP DRAW @ 14VDV	LEDS	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY (cd)
<b>FLOOD</b>	SM	63311	83311	63411	83411	2.40	44.5	3.18	12	3645	166	129	258	16587
<b>DRIVING</b>	SM	63351	83351	63451	83451	2.40	52.8	4.27	18	6615	372	193	386	37203
<b>SPOT</b>	SM	63321	83321	63421	83421	2.40	44.5	3.18	12	3645	2027	450	900	202687
<b>HYPERSPOT</b>	SM	63341	83341	63441	83441	2.40	44.5	3.18	12	3645	2549	505	1010	254913
<b>SPOT/FLOOD COMBO</b>	SM	63331	83331	63431	83431	2.40	44.5	3.18	12	3645	1346	367	734	134593
<b>DRIVING/HYPERSPOT COMBO</b>	SM	63361	83361	63461	83461	2.40	49.8	3.56	14	4252	1847	430	860	184742

## RETROFIT SKUS

<b>SPOT</b>	Retrofit	63322	-	-	-	2.00	44.5	3.18	12	3645	2027	450	900	202687
<b>HYPERSPOT</b>	Retrofit	63342	-	-	-	2.00	44.5	3.18	12	3645	2549	505	1010	254913
<b>DRIVING/HYPERSPOT COMBO</b>	Retrofit	63362	-	-	-	2.00	49.8	3.56	14	4252	1847	430	860	184742
<b>SPOT/HYPERSPOT COMBO</b>	Retrofit	63372	-	-	-	2.00	55.8	3.99	14	4252	1994	447	893	199367

\* Raw Lumens is based on LED manufacturer specifications;\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



## LIGHTS COME WITH

### BLACK HOUSING SURFACE MOUNT ONLY

- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Harness w/Switch
- Deutsch Connector
- Solid Black Light Cover

### WHITE HOUSING ONLY

- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Open Leads, No Connector
- Harness Sold Separately
  - PN 40193 (Single)
  - PN 40196 (Pair)

### RETROFIT BLACK HOUSING ONLY

- Built-in Power & Ground Threaded Insert

# R-SERIES® 36

RIGID has expanded its round light offering with the new R-Series 36. Designed to be a direct fit into any Par 36 bulb enclosure, this new light is a drop-in replacement for thousands of fixtures used on tractors, heavy equipment, and other industrial and agricultural applications. The Par 36 is also used on many spotlight fixtures. Inside, the R-36 Retrofit is available with RIGID's optics in a variety of beam patterns. The lightweight housing includes an advance heat sink for superior cooling, while the outside includes a durable UV-resistant polyester powder coat finish and an unbreakable polycarbonate lens. With its tested resistance to vibration, salt, and water, the Par 36 Retrofit provides years of trouble free use.



**DROP-IN  
REPLACEMENT**





## FEATURES

- Up to 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Built-in Power & Ground Threaded Insert
- Through-Hole Heatsink for Optimal Cooling
- Retrofits Standard PAR36 Bulb Enclosure
- Clear Light Cover Included (Light Shown with Cover On)

## DIMENSIONS & MOUNTS



### PAR36 RETROFIT



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


### FLOOD DIFFUSED

Flood optic behind diffused lens




### DRIVING DIFFUSED


Driving optic behind diffused lens



### FLOOD



### DRIVING



### SPOT



### HYPERSPOT





HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

SPECIFICATIONS



	MOUNT	BLACK SINGLE	WT. (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
FLOOD DIFFUSED	Retrofit	62120	1	24	1.77	4	1411	8	28	57	808
DRIVING DIFFUSED	Retrofit	62150	1	32	2.45	6	2910	19	43	86	1867
FLOOD	Retrofit	62130	1	24	1.77	4	1411	33	58	115	3329
DRIVING	Retrofit	62140	1	32	2.45	6	2910	146	121	241	14559
SPOT	Retrofit	62110	1	24	1.77	4	1411	575	240	480	57542
HYPERSPOT	Retrofit	62160	1	23	1.77	4	1411	792	281	563	79178

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



LIGHTS COME WITH

- Clear Light Cover
- Built-in Power & Ground Threaded Insert

# SCENE LIGHTS

Developed specifically for First Responders and Rescue personnel, LED Scene Lighting by RIGID is an efficient way to light up any area. Available in a variety of sizes and configurations to accommodate different needs and uses, Scene Lighting utilizes the latest in LED technology in a rugged housing that incorporates a thermally optimized heat sink for prolonged, trouble-free use. Scene Lights provide up to 115° horizontal spread for maximum coverage and heavy-duty mounting brackets that enable precise adjustable aiming. Whether it's the scene of a fire or a remote pit in Baja, Scene Lighting provides clear, bright light with minimal amp draw.

RIGID's Scene lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

**115°  
HORIZONTAL  
SPREAD  
(2 x 10)**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Open Leads for Convenient Wiring
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Heavy Duty Brackets Included (Excludes 1 x 2)
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI (Excludes 1 x 2)
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Up to 115° Beam Pattern
- White Polycarbonate Reflector with 98% Reflectivity

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE





4 x 4



2 x 10




2 x 2



Also available in  
Flush Mount

1 x 2




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS


Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

SCENE LIGHTS



Up To 115°

1 X 2 SCENE LIGHT  
SIDE VIEW

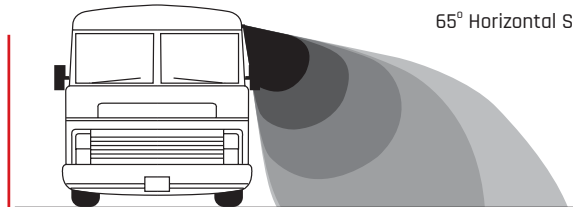

69° Vertical Spread

65° Horizontal Spread

## AC ALSO AVAILABLE

ALL HOUSINGS AVAILABLE IN WHITE





HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



AC VOLTAGE =114-126 VAC

	BEAM DEGREE	MOUNT	BLACK PART NO	WHITE PART NO.	AC/DC	WT. (LBS.)	WATTS	AMP DRAW	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>1 X 2 SCENE LIGHT</b>	65°	SM	86610	86620	DC	.53	9	.75 @14VDC	3	1100	7	26.4	52.7	695
<b>AMBER - 1 X 2 SCENE LIGHT</b>	65°	SM	86630	86640	DC	.53	9	.75 @14VDC	3	1100	N/A	N/A	N/A	N/A
<b>2 X 2 SCENE LIGHT</b>	115°	HD	681513	681613	DC	2	37	2.78 @14VDC	4	4000	12	35	70	2143
	115°	FM	681523	681623	DC	1.17	37	2.78 @14VDC	4	4000	12	35	70	2143
	115°	HD	683713	683613	AC	2.1	17	.19 @120V	16	1541	8	28	57	797
<b>2 X 10 SCENE LIGHT</b>	115°	SM	68131	68141	DC	5.36	76	6 @14VDC	9	8190	22	47	94	2184
	115°	SM	68351	68341	AC	5.5	76	.79 @120V	80	6293	27	52	104	2702
<b>4 X 4 SCENE LIGHT</b>	115°	SM	681113	681213	DC	2.8	83	5.8 @14VDC	9	8190	22	46	93	2150
	115°	SM	683313	683113	AC	2.8	58	.55 @ 120V	64	6563	24	49	98	2419

\* Raw Lumens is based on LED manufacturer specifications. \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount



69° VERTICAL  
SPREAD  
&  
65° HORIZONTAL  
SPREAD  
(1x2 SCENE LIGHT)



## LIGHTS COME WITH

### 4 x 4 / 2 x 2 / 2 x 10 HOUSING ONLY

- Mounting Hardware
- Heavy Duty U-Shape Brackets
- Vibration Isolators

### 1 x 2 HOUSING ONLY

- Mounting Hardware

### DC VERSION ONLY

- 2-Wire Open Lead, No Connector

### AC VERSION ONLY

- Standard 110V Outlet Plug

# SITE SERIES™

Many situations require a highly portable, high-powered light source that can illuminate a required worksite. Whether it's an emergency scene, a mine or industrial application, a remote pit in Baja, or a harbor slip, whatever the situation, RIGID's Site Series provides the flexibility to light any area and provides the mobility to easily move the lighting source with changing conditions. Featuring RIGID's all new 80/40 Optic, Flood and an 80/40, Spot Combo, the Site Series offers a wider area of coverage than comparable lights from the competition. The Site Series' handle and tilting brackets make adjustments and moving the light easy for the user. Additional mounting options are sold separately. Available in both AC and DC options with a 50,000 hour lifespan and unmatched RIGID quality, the RIGID Site Series provides reliable lighting for many different worksite environments.

RIGID's Site Series lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**20° SIDE  
ANGLE DESIGN  
TO INCREASE  
BEAM WIDTH**



## FEATURES



- 50,000+ Hour Lifespan
- 10-16 VDC, 16-48 VDC, 100-277 VAC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)
- Available in DC & AC Versions
- DC available in Low or High Voltage
- 48 High Quality LEDs
- 20° Side Angle Design for Increased Beam Width
- Various Optic Configuration Options
- Aluminum Clad Printed Circuit Board
- High Quality Aluminum Handle Included to Assist with Aiming or Transporting the Site Light
- Heavy Duty Mounting Bracket with Adjustable Mounting Angles
- Additional Mounting Accessories Available

## DIMENSIONS & MOUNTS

ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT

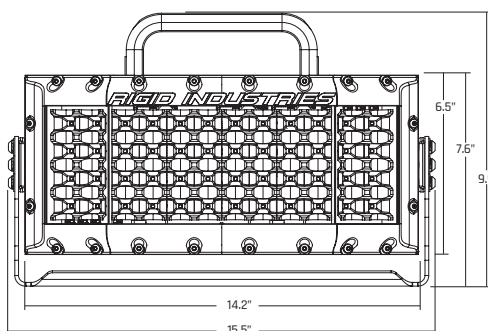

### POLE MOUNT ALSO AVAILABLE

Sold Separately - SEE GRILLES & OE MOUNTS

40095 PART NO.




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?





## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**H350 FLOOD**

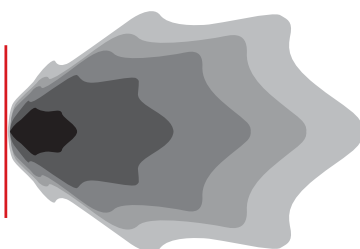

**80 / 40**



**SPOT +  
80 / 40 COMBO**

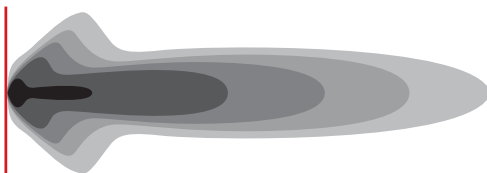



HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



	MOUNT	BLACK PART NO.	WHITE PART NO.	VOLTAGE	AC/ DC	WT (LBS.)	WATTS	DC-AMP DRAW @14VDC	AC-AMP DRAW @120VAC	LEDS	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY (cd)
<b>H350 FLOOD</b>	SM	73111	74111	10-16VDC	DC	13.2	283	21.7	-	48	16800	372	203	407	39574
	SM	73311	74311	16-48VDC	DC	13.2	310	22.14	-	48	19200	471	217	434	47129
	SM	73511	74511	100-277VAC	AC	17.4	290	-	2.43	48	19200	471	217	434	47129
<b>80/40</b>	SM	73141	74141	10-16VDC	DC	13.2	283	21.7	-	48	16800	193	139	277	18097
	SM	73341	74341	16-48VDC	DC	13.2	310	22.14	-	48	19200	212	146	291	21215
	SM	73541	74541	100-277VAC	AC	17.4	290	-	2.43	48	19200	212	146	291	21215
<b>SPOT + 80/40 COMBO</b>	SM	73131	74131	10-16VDC	DC	13.2	283	21.7	-	48	16800	3511	592	1185	337506
	SM	73331	74331	16-48VDC	DC	13.2	310	22.14	-	48	19200	3734	611	1222	373412
	SM	73531	74531	16-48VDC	DC	13.2	310	22.14	-	48	19200	3734	611	1222	373412

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, Heavy Duty Adjustable U-Shape Bracket
- Vibration Isolators

### AC VERSION ONLY

- Power Supply with Standard 110V Outlet Plug
- Deutsch Connector (Both Light & Power Supply)

### DC VERSION ONLY

- 2-Wire Open Leads, No Connector



# RI-SERIES™

The RIGID RI-Series is a full line of flashlights that offer high-output LED technology in a compact package. Inspired by tactical flashlights developed for military and law enforcement, the RI-Series couples cutting edge LEDs with machined aluminum reflectors to create a rugged, powerful light source. With a military-grade hard anodized aluminum housing, waterproof construction, rechargeable battery, and many more features, the RI-Series can withstand the elements and provide years of trouble-free operation.



## LIGHTS COME WITH

- Anti-Roll
- Pocket Clip (Excludes RI-600)
- Lanyard
- AC/DC Car Charger
- 110 Volt Wall Charger
- Rechargeable Lithium Ion Battery(s)
  - (1) RI-600 & RI-800
  - (2) RI-1100 & RI-1500

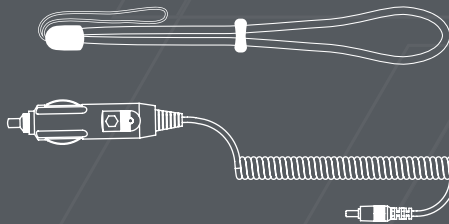

THE POWER  
OF RIGID IN  
YOUR  
HANDS



## FEATURES

- 50,000+ Hour Lifespan
- Impact Resistant Polycarbonate Lens
- IP67 Compliant - Dust / Water Ingress
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- High, Medium, Low, And Strobe Modes
- High Intensity Spot Reflector Design
- Thermally Regulated LED Circuit
- Momentary Tail-Cap Switch
- Type 3 Military Grade Hard Anodized Aluminum
- Polished Aluminum Reflector
- RI-600 is Available in Red, Blue, Green, Infrared and UV LEDs
- Tactical Bezel Housing (Excludes RI-600)
- Textured Pattern On Handle For Grip
- Works with 18650 Li-Ion or CR123 Batteries
- Limited Lifetime Warranty
- Holsters Also Available (Sold Separately)



## DIMENSIONS



**RI-600**



**RI-800**



**RI-1100**



**RI-1500**

PART #	LIGHT COLOR OPTION
30130	Cool White
30132	Red
30133	Green
30134	Blue
30135	Semi-UV
30136	Infrared

## SPECIFICATIONS



PART NO.	MODE	*RAW LUMENS	EFFECTIVE LUMENS	BATTERY RUN TIME	LUX @ 10mV	BEAM DISTANCE (m) w/1 LUX	**PEAK BEAM INTENSITY (cd)
30130 (Cool White)	HIGH	680	620	1.8 hrs	69	165	6945
	MED	250	210	6.5 hrs	27	104	2710
	LOW	80	60	24 hrs	7	51	669
30140 (Cool White)	HIGH	820	768	1.6 hrs	231	304	23174
	MED	300	273	5.5 hrs	95	195	9560
	LOW	100	81	18 hrs	27	105	2740
30150 (Cool White)	HIGH	1100	960	2.1 hrs	253	318	25340
	MED	300	273	9 hrs	95	195	9560
	LOW	100	81	26 hrs	27	105	2740
30160 (Cool White)	HIGH	1500	1340	1.2 hrs	602	490	60202
	MED	475	412	3.7 hrs	224	299	22476
	LOW	150	104	16.5 hrs	51	146	5167

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



# Truck-Lite® **LED HEADLIGHT KIT** BY RIGID INDUSTRIES®

Truck-Lite® Headlight Kits by RIGID are an excellent upgrade for light, medium and heavy-duty trucks, off-road vehicles, classic cars, motorcycles and more. Perfectly adapted to cold environments, the 7" Round Heated Lens provides a steady, complete-surface melting of snow and ice that is only active when temperatures drop under 50°F/10°C. Metalized reflector optics provide lighting that is smooth and clean across the entire driving surface. LED headlights provide a brighter, crisper and whiter light output as compared to traditional incandescent, halogen, or HID headlights, with a color temperature closer to daylight. The advantages of LED lighting technology result in dramatically improving light projection distance and overall visibility. The durability and dependability of LED lighting provides a solid-state, bulb-free headlamp design that is impervious to damage from shock and vibration.







## FEATURES

- DOT Compliant
- 16-Gauge Wire
- Encapsulated Circuitry
- 2 LED Arrays
- Low & High Beams
- Hard-Coated Polycarbonate Lens
- E-Coat Aluminum Housing
- Metalized Reflectors



Heated Lens  
Turns On At 10°C/50°F

## SPECIFICATIONS



	SINGLE PART NO	PAIR PART NO	WT (LBS.)	WATTS	LEDs	AMP DRAW HEATED OFF @ 12.8VDC	AMP DRAW HEATED ON @ 12.8VDC
<b>7" Round w/ PWM Adaptors</b>	-	55000	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>7" Round w/ H13 to H4 Adaptors</b>	-	55001	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>7" Round Single</b>	55002	-	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>5" x 7" No Adaptor</b>	-	55003	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>7" Round Heated Lens w/PWM Adaptor</b>	-	55004	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>7" Round Heated Lens w/ H13 to H4 Adaptor</b>	-	55005	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>LED HL PWM Anti-Flicker Adaptor - H13 to H4</b>	55006	-	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>7" Round Heated Lens Non JK No Adaptor</b>	-	55008	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6
<b>7" Round Lens Non JK No Adaptor</b>	-	55009	2	<b>46</b> / 23	2	<b>3.0</b> / 5.6	<b>7.6</b> / 10.6

# SAE COMPLIANT

Off-road auxiliary lighting is one thing, but everyone knows that it's important to have lighting that is also safe and legal for on-road use. RIGID' SAE Compliant Fog Lights and Auxiliary High Beam Driving Lights allow them to be used on-the-road and not just off-road. RIGID created the proprietary output spread and height with the new patented Clarilux™ optic system. The color temperature of these LEDs was carefully chosen to be a perfect range of pure daylight to penetrate the night for superior clarity on the road. These SAE Compliant lights project long-range high intensity light while drawing very little power and provide up to 50,000 useful hours. The low profile design includes a High-Grade Aluminum Alloy Housing with a custom designed oversized heat sink to keep the LEDs running cooler, brighter and longer. Combine this with the strength of a polycarbonate lens; the RIGID SAE Compliant Lights represent the ultimate solution for your street-legal lighting in North America.



**PERFECT FOR  
ON ROAD AND  
OFF-ROAD USE**



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions May Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions May Apply)
- Fog Light is Compliant with SAEJ583
- Auxiliary High Beam Driving Light Compliant with SAE J581
- SAE 20"-30"SR-Series has Back-Lit Branding Plate that can be ran independently, or in tandem with the forward projecting LEDs

## SPECIFICATIONS



A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX

	SERIES/SIZE	BLACK PAIR	WT. (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY (cd)
<b>FOG LIGHT</b>	SR-M SERIES	902533	0.588	15	1.1	2	1179	69	83	116	6662
<b>FOG LIGHT</b>	D-SERIES	504813	1.10	22	1.5	4	1760	106	103	206	10570
<b>FOG LIGHT</b>	D-XL SERIES	321513	1.81	19	1.4	6	2315	116	108	215	11548
<b>FOG LIGHT</b>	SR-SERIES (6")	906703	1.78	21	1.5	6	2640	130	114	228	13030
<b>DRIVING AUXILIARY HIGH BEAM</b>	Q-SERIES	244813	2.8	140	10	16	8253	579	241	481	46486
<b>DRIVING AUXILIARY HIGH BEAM</b>	E-SERIES (6")	106613	2.35	41	2.85	12	5280	492	222	444	49230
<b>DRIVING AUXILIARY HIGH BEAM</b>	SR-SERIES (20")	920413	4.7	95	6.8	28	8253	342	185	370	34263
	SR-SERIES (30")	930413	6.7	180	12.9	48	14148	745	273	546	74555


\* Raw Lumens is based on LED manufacturer specifications. \*\* Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards. SPECIFICATIONS ARE DISPLAYED PER SINGLE LIGHT

## BEAM PATTERNS



Our custom-designed LUX graphs shown below visually demonstrate the distinct beam pattern created by each optic.

**DRIVING AUXILIARY  
HIGH BEAM /  
FOG LIGHT**



**SIDE VIEW**



# E-MARK COMPLIANT E<sub>11</sub>

RIGID's worldwide expansion means addressing the needs of customers in a global marketplace, including those that need lighting that complies with European standards. For these users, RIGID now offers E-Mark Compliant Lights (ECE). The E-Mark Compliance is a widely recognized mark in the automotive industry covering the safety requirements of automotive vehicles and their components across Europe.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusion May Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI



- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions May Apply)



## SPECIFICATIONS

A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX

	SERIES/ SIZE	SINGLE PART NO	PAIR PART NO	MAX LUM INTENSITY#	CLASS	WT. (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY (cd)
ECE DRIVING	SR (10")	91061EM	91161EM	7.5	A	2.50	52.4	3.8	15	5625	290	170	341	29000
	SR (20")	92161EM	-	12.5	A	5.43	120.1	7.61	30	11250	685	262	523	68500
	E (6")	17561EM	17661EM	7.5	A	2.35	67.5	4.89	18	6750	360	190	379	36000
	E (10")	17861EM	17961EM	10	A	3.45	75	5.43	30	9000	482	220	439	48200
	E (20")	12161EM	-	17.5	B	6.15	162	11.8	60	18000	867	294	589	86700
	Q	54431EM	-	12.5	A	2.8	69	4.9	24	9000	360	190	379	35987
ECE SPOT	D-SERIES	20121EM	20221EM	17.5	B	1.10	15.8	1.1	4	1568	646	254	508	64600
	SR (6")	90621EM	90721EM	17.5	B	1.78	23.5	1.7	6	2250	730	270	540	73000
	SR (10")	91021EM	91121EM	30	B	2.5	35.9	2.6	10	3750	1290	359	718	129000
	E (4")	10421EM	10431EM	27.5	B	1.90	30	2.17	8	3000	1111	333	667	11100
	E (6")	10621EM	10631EM	37.5	B	2.35	45	3.26	12	4500	1750	418	837	17500
	SR-Q	-	90521EM	10	B	.75	15	1.1	4	1568	458	214	428	17500
ECE SPOT/ FLOOD COMBO	SR (20")	92031EM	-	37.5	B	2.72	75.9	5.5	20	7500	1750	418	837	175000
	E (10")	11031EM	11041EM	30	B	3.45	65	4.71	20	5740	1500	387	775	150000

\* Raw Lumens is based on LED manufacturer specifications. \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



## BEAM PATTERNS

ECE DRIVING



ECE SPOT



ECE  
SPOT/FLOOD COMBO






# AMBER LIGHTS

Amber light has long been known to be more effective in murky conditions, including fog, extreme dust, and smoke. Desert racers have adopted Amber lighting as a better option to traditional white light when chasing down vehicles ahead of them. First responders appreciate having a dedicated amber lighting option when conditions render white light less effective. As a result, we offer dedicated Amber light bars to fill these needs and those of any application where conventional light is obstructed by adverse conditions.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C

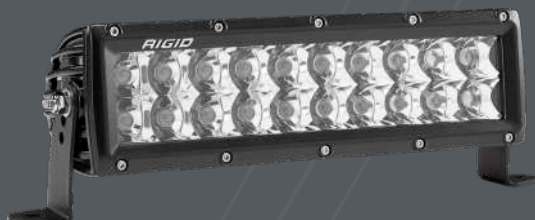

- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)
- Instant On / Off - No Warm Up

## D-SERIES AMBER LIGHTS



	MOUNT	SINGLE PART #	PAIR PART #
SPOT	SM	201223	202223
	FM	211223	212223
	HD	221223	222223
DRIVING	SM	501323	502323
	FM	511323	512323
	HD	521323	522323
FLOOD	SM	201123	202123
	FM	211123	212123
	HD	221123	222123
DRIVING DIFFUSED	SM	-	502523
	HD	521523	522523
FLOOD DIFFUSED	HD	221523	222523

## E-SERIES AMBER LIGHTS



	SIZE	SINGLE PART #
SPOT	4"	10422
	6"	10622
	10"	11022
	20"	120223
	30"	130223
	40"	140223
	50"	150223
SPOT/FLOOD COMBO	6"	10632
	10"	11032
	20"	120323
	28"	128323
	30"	130323
	38"	138323
	40"	140323
	50"	150323

## SR-M AMBER LIGHTS



	MOUNT	SINGLE PART #	PAIR PART #
SPOT	SM	90222	-
	FM	92222	-
DRIVING	SM	91232	-
	FM	93232	-
DIFFUSED	SM	91252	-
	FM	93252	-

## SR-SERIES AMBER LIGHTS



	SIZE	SINGLE PART #
SPOT	6"	90622
	10"	91022
SPOT/FLOOD COMBO	6"	90632
	10"	91032
	20"	92032
	30"	93032
DRIVING	40"	94032
	50"	95032
	6"	90662
	10"	91062

## SR-Q AMBER LIGHTS



	MOUNT	SINGLE PART #	PAIR PART #
SPOT	SM	90422	90522
	FM	92422	92522
DRIVING	SM	91432	91532
	FM	93432	93532

(SM) = Surface Mount, (FM) = Flush Mount, (HD) = All Black Heavy Duty

# MIL-STD-461F EMI COMPLIANT

RIGID's MIL-STD-461F Compliant lights meet stringent military standards and are designed to withstand the harshest work environments. Using RIGID's forward projecting LED lighting technology, the patented optics capture the maximum amount of light emitted from the individual LEDs, creating a brilliant white light that delivers a reliable 50,000 hour lifespan. When lighting options demand military-grade reliability, the MIL-STD-461F EMI Compliant light is the total lighting solution.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)



## SPECIFICATIONS

A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX


C = BEAM DISTANCE (m) WITH .25 LUX

	SERIES SIZE/MOUNT	SINGLE PART NO.	PAIR PART NO.	WT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	RAW LUMENS	A	B	C	PEAK BEAM INTENSITY(cd)
<b>DRIVING DIFFUSED</b>	D (HD)	521513MIL	-	1.40	34.5	2.40	6	3096	22	47	94	2200
	D (HD)	-	522513MIL	2.80	34.5	2.40	6	6192	41	64	128	4118
<b>FLOOD</b>	E (6")	106113MIL	-	2.35	45	3.13	12	4500	156	125	250	15615
	E (10")	110116MIL	-	3.45	75	5.21	20	5740	237	154	308	23968
<b>DRIVING</b>	D (HD)	521313MIL	-	1.40	34.5	2.40	6	3096	166	129	258	16586
	D (HD)	-	522313MIL	2.80	34.5	2.40	6	6192	304	174	349	30370
<b>SPOT</b>	E (6")	106213MIL	-	2.35	45	3.13	12	4500	1612	402	803	161198
	E (10")	110213MIL	-	3.45	75	5.21	20	5740	2460	496	992	245953
<b>FLOOD/ SPOT COMBO</b>	E (6")	106313MIL	-	2.35	45	3.13	12	4500	687	262	524	68668
	E (10")	110313MIL	-	3.45	62	4.31	20	5740	1756	419	838	175555

\* Raw Lumens is based on LED manufacturer specifications. \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards. (HD) = All Black Heavy Duty



## BEAM PATTERN

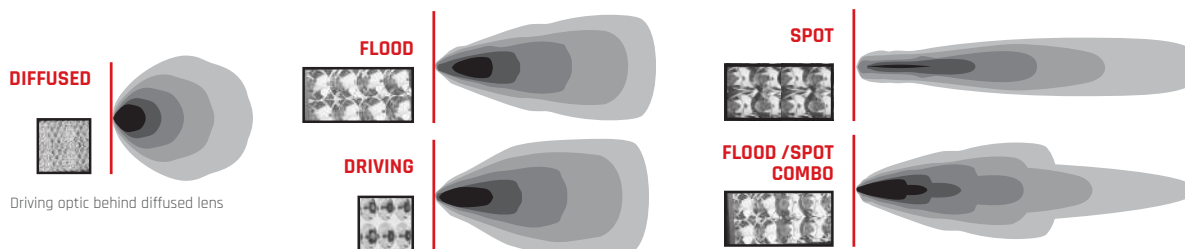

# INFRARED LIGHTS

Certain applications require a stealthy light source, and the Infrared LED Lights by RIGID offers an excellent solution. RIGID combines special LED lighting configurations and optics to provide a high-powered infrared light source that brings stealth to a new level. These infrared lights produce a beam of energy at 940 nanometers, which is considered invisible light. These lights are useful for enhancing night vision ability for military personnel, public safety, security services, and many other applications that utilize infrared technology.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology



- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)
- 940 nm Infrared Illuminated beam
- Tinted CR-39® Lens to Eliminate all Reflective Surfaces within the Housing

## SPECIFICATIONS



	SERIES SIZE	SINGLE PART NO.	PAIR PART NO.	WEIGHT (LBS.)	WATTS	AMP DRAW @ 14VDC	LEDs	RAW LED MW OUTPUT	E-lm OUTPUT	E-cd
<b>SPOT</b>	D-SERIES	201293	202293	1.1	17.5	1.25	4	3960	1584	64200
<b>DRIVING</b>	D-SERIES	501393	502393	1.1	32.2	2.3	6	5940	2376	13376
<b>FLOOD/ SPOT COMBO</b>	SR (10")	91039	-	2.72	34.5	2.46	10	9900	3960	89760
	E (4")	10439	-	1.9	35.8	2.56	8	7920	3168	43648
	E (10")	110392	-	3.45	46	3.28	20	19800	7920	206968

E-lm - Lumen Equivalent / E-cd - Candela Equivalent

## NIGHT VISION



## NIGHT VISION WITH INFRARED LIGHT



# LIGHTING KITS

pg **110** - pg **114**



# IGNITE™ BACK-UP KITS

Most vehicles have very inadequate backup lighting, which can be a major safety problem. RIGID makes it easy to add compact and powerful backup lighting to any vehicle with the RIGID Ignite™ Backup Kit. The Ignite Series Accessory Lights are small but pack a lot of power with 1000 raw lumens in a light that measures just 1.4" x 1.4" x 2". While a wiring harness is not included, the powerful LEDs in each light consume less than one amp each, so powering them is often as easy as tapping into the vehicle's existing backup lighting circuit.



## FEATURES


- Small Package, Big Output
- IP68 Compliant
- RIGID Quality & Performance
- Unlimited Mounting Options
- (Surface Mount);  
Mates To Any Go-Pro® Case Mount
- Easy (Flush Mount) Install
- Using 1.75" Hole saw
- Low Minimum Voltage; 6-28 VDC
- See pg. 34 for Additional Features




## DIMENSIONS & MOUNTS



### SURFACE MOUNT

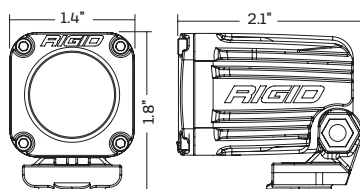

### FLUSH MOUNT

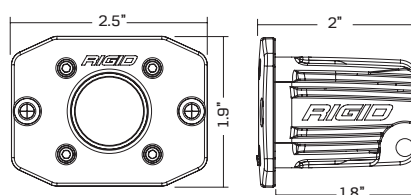

## SPECIFICATIONS



	MOUNT	KIT PART NO.	WT. (OZ)	WATTS	AMP DRAW @ 14VDC	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
DIFFUSED	SM	20541	3.8	12	0.48	1	1000	9	29	60	885
	FM	20641	3.8	12	0.84	1	1000	9	29	60	885

A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX

## KIT INCLUDES

- 2 Ignite Lights (Surface or Flush Mount)
- 2 Sets of Hardware
- 48" Wire Leads
- 2 Mounting Brackets (Surface)

# IGNITE™ MOTORCYCLE KITS

RIGID's Ignite is compact yet powerful, packing 1000 raw lumens in a housing that measures just 1.4" x 1.4" x 2" and weighs less than 4 ounces. Each Ignite Light also consumes just 1 amp at full power. The Motorcycle Kits have both High and Low settings that enable the lights to easily work with a sealed control switch suitable for permanently mounting the lights just about anywhere on the bike. With the Ignite Motorcycle Kit, it's easier than ever to add lights to touring bikes, cruisers, dirt bikes, and just about any other application.





## FEATURES

- Small Package, Big Output
- IP68 Compliant
- RIGID Quality & Performance
- Unlimited Mounting Options
- (Surface Mount);  
Mates To Any Go-Pro® Case Mount
- Using 1.75" Hole saw
- Low Minimum Voltage; 6-28 VDC
- 2 Outputs; High & Low
- See pg. 34 for Additional Features



## DIMENSIONS & MOUNTS

### SURFACE MOUNT



A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX



## SPECIFICATIONS HIGH / LOW

	MOUNT	KIT PART NO.	WT. (OZ)	WATTS	AMP DRAW @ 14VDC	LEDs	*RAW LUMENS	A	B	C	**PEAK BEAM INTENSITY(cd)
<b>FLOOD</b>	SM	20741	3.8	12 / 2	0.84 / 0.14	1	1000 / 200	18 / 2	42 / 11	80 / 23	1786 / 239
<b>SPOT</b>	SM	20731	3.8	12 / 2	0.85 / 0.14	1	1000 / 200	139 / 43	118 / 43	236 / 87	13939 / 1895



## KIT INCLUDES

- 2 Ignite Lights High / Low Lights
- 2 Sets of Hardware
- 2 Mounting Brackets
- 1 Wiring Harness & Switch

*Brandon Palaniuk*


# BRANDON PALANIUK SIGNATURE SERIES BOAT DECK LIGHT KITS



## FEATURES

- 50,000+ Hour Lifespan
- 9-24 VDC
- Durable UV Polyester Powder Coat
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Over / Under Voltage Protection
- Op. Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Custom Wiring Harness (Up to 24' Fishing Boat)
- Available in 4 and 6 Light Options
- Multiple Color Choices

Created specifically for night fishing, RIGID's Boat Deck Light Kits provide a simple and effective way to illuminate boat decks for night use without blinding boat occupants. These kits consist of four or six A-Series lights with a dedicated 27' harness that can handle installations on boats up to 24' in length. The A-Series LED lights feature water resistant die cast aluminum housings, polycarbonate lens and a built-in thermal management system that ensures long life. The kit includes switches, mounting hardware, wiring and a power distribution block(s) for a simple and clean install. A variety of colors and color combinations are available to accommodate your own personal style or needs.

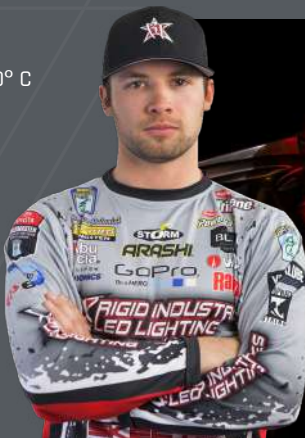

## SPECIFICATIONS



		KIT PART NO.	WATTS	AMP DRAW @ 14VDC	LEDs	*RAW LUMENS	Number of Distribution Blocks	Number of Switches
4 LIGHT KIT	Cool White	400763	16	0.8	12	800	1	1
	Blue	400773	16	0.8	12	800	1	1
	Red	400783	16	0.8	12	800	1	1
	Green	400793	16	0.8	12	800	1	1
	Amber	400803	16	0.8	12	800	1	1
	(2) White, (2) Blue	400813	16	0.8	12	800	2	2
	(2) White, (2) Red	400823	16	0.8	12	800	2	2
	(2) White, (2) Green	400833	16	0.8	12	800	2	2
	(2) White, (2) Amber	400843	16	0.8	12	800	2	2
6 LIGHT KIT	Cool White	400853	24	1.2	18	1200	1	1
	Blue	400863	24	1.2	18	1200	1	1
	Red	400873	24	1.2	18	1200	1	1
	Green	400883	24	1.2	18	1200	1	1
	Amber	400893	24	1.2	18	1200	1	1
	(2) White, (4) Blue	400903	24	1.2	18	1200	2	2
	(2) White, (4) Red	400913	24	1.2	18	1200	2	2
	(2) White, (4) Green	400923	24	1.2	18	1200	2	2
	(2) White, (4) Amber	400933	24	1.2	18	1200	2	2

## KIT INCLUDES

- (4) or (6) A-Series w/ 15' Leads
- Distribution Block(s) for Easy Wiring
- 27' Wiring Harness w/ Fuse & Switch
- Mounting Pads
- 3 Amp Blade Fuses (4 or 6)
- 1 or 2 Switches (1 or 2 Colors)

# UV BLACK LIGHT KITS

The UV Black Light Kits were designed exclusively with the night fisherman in mind. The UV Black Light Kits will illuminate fluorescent fishing line, making it easy to detect subtle bites. The added SR-M PRO Driving Light Kit helps with making precise casts down the bank or to aide in netting a catch. Both lights include a 15' cord with a cigarette lighter adapter as well as a triple suction cup mount, making it easy to aim the light exactly where you want it anywhere on the boat. Whether you're a professional angler or you just enjoy night fishing, the RIGID UV Black Light Kits will help increase the success of any night fisherman.



## SINGLE LIGHT KIT



**PART# 401083**

### **KIT INCLUDES**

- SR-M Driving Diffused UV Light
- Triple Suction Cup Mount
- 15ft. DC Cigarette Lighter Adapter with switch

## COMBO LIGHT KIT



**PART# 401073**

### **KIT INCLUDES**

- SR-M Driving Diffused UV Light
- SR-M PRO Driving Light
- Green Light Cover
- Triple Suction Cup Mount
- 15ft. DC Cigarette Lighter Adapter with switch

# TROLLING MOTOR MOUNT LIGHT KIT

Available for several popular models of the Minn Kota® Fortrex® trolling motor, this mounting kit replaces the original diversion plate mounted on the nose of the trolling motor mount. The housing is constructed of PA66 glass filled nylon and shock-absorbing silicone rubber, while a 25' plug-and-play harness makes installation easy. This lighting kit makes it simple to see what's dead ahead without overpowering normal night vision. The kit even includes an amber lens cover for use in fog or rain.



## TMM LIGHT KIT



**PART# 400033**

### **KIT INCLUDES**

- Minn Kota® Fortrex® Trolling Motor Mount
- 25 ft. Plug and Play Harness with Waterproof Switch
- SR-M PRO Driving LED Light
- Amber Lens Cover

- Compatible with Minn Kota® Fortrex® 80, 101, 101H, and 112
- DISCLAIMER: Not compatible with boat models where factory navigation lights are installed in the forward most portion of the rub rail at the bow of the boat.



# ROCK LIGHT KITS

The RIGID Rock Light Kit uses the power and durability of A-Series LED lighting and adds custom 15' leads on each light, a distribution block, plus switch and angled mounts to light any truck, Jeep, or all-terrain vehicle. This kit will allow you to light up the trail with strategically placed lights on the vehicle. Perfect for night rock-crawling, the LED lights are available in a variety of colors, including white, red, blue, green, or amber to aid night vision or accent vehicle colors. Rock Light Kits are available in 4-light or 6-light configurations to enhance and customize your night crawling experience.

## 4 LIGHT KIT

LIGHT COLOR	KIT PART NO.
White	400203
Red	400213
Green	400223
Blue	400233
Amber	400243

## 6 LIGHT KIT

White	400253
Red	400263
Green	400273
Blue	400283
Amber	400293

### KIT INCLUDES

- A-Series with 15' Leads
- Distribution Block for Easy Wiring
- 8' Wiring Harness
- Angled Mounting Pads w/30° Angle
- Mounting Hardware



# BACK-UP LIGHT KITS

Most factory back-up lights are inadequate for being able to clearly see what's behind the vehicle while in reverse. The SR-Q Series PRO Back Up Light Kit is a sleek low profile lighting solution that packs more lighting output than ever before. Thanks to recent improvements to the advanced LED circuitry inside, the SR-Q Series PRO now emits 3,168 raw lumens.



### FEATURE

- 3 POSITION SWITCH OPTIONS: on, off and auto with reverse

## SR-Q PRO KIT

MOUNT	KIT PART NO.
SM	980023
FM	980033

## SR-M PRO KIT

SM	980003
FM	980013

(SM) = Surface Mount  
(FM) = Flush Mount

### KIT INCLUDES

- (2) SR-Q PRO Surface or Flush Mount Flood Diffusion Lights
- OR
- (2) SR-M PRO Surface or Flush Mount Flood Diffusion Lights
- 25' Wiring Harness with Switch
- Mounting Hardware
- Black Covers for Pair of Lights (SM ONLY)



# GRILLES & OE MOUNTS

pg 117 - pg 131

# ACCESSORIES

pg 133 - pg 136

## **BUILD INCLUDES**

Toyota Tacoma Grille | PG. 128

Toyota Tacoma SAE Kit | PG. 129

Toyota Tacoma Bumper Mount | PG. 129







# VEHICLE SPECIFIC

## ARCTIC CAT®

### ARCTIC CAT GRILLE MOUNT

Wildcat®  
2012-2016  
46521  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

ATV  
N/A  
40630  
(1) 6" E Pro or (1) 6" SR-Series Pro  
Light Sold Separately

## ATV

### ATV HANDLEBAR MOUNT

## ATV

### ATV HANDLEBAR MOUNT

ATV  
N/A  
40230  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

ATV  
N/A  
41030  
(1) 10" E or (1) 10" SR-Series Pro  
Lights Sold Separately

## CAN AM®

### MAVERICK® X DS HOOD MOUNT

Maverick X  
2014-2016  
46549  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### MAVERICK X3 DOME LIGHT KIT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Maverick X3  
2017 +  
41635  
(1) A-Series  
INCLUDES LIGHT

### MAVERICK X DS ROOF MOUNT

Maverick X  
2014-2016  
46548  
(1) 40" RDS-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### MAVERICK X3 DOME MOUNT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Maverick X3  
2017 +  
41636  
(1) A-Series  
Light Sold Separately

### MAVERICK X DS ROCK KIT

Maverick X  
2014-2016  
46551  
(4) A-Series  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### MAVERICK X3 SHOCK MOUNT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**

Maverick X3  
2017 +  
41630  
(2) D-Series PRO,  
(2) D-SS Series PRO,  
(2) SR-M Series PRO,  
And/Or (1) 10" SR-Series PRO  
Light Sold Separately

### MAVERICK X DS REVERSE MOUNT

Maverick X (Turbo Only)  
2014-2016  
46550  
(2) D-Series® Pro (2) SR-M® Pro  
or (1) SR-Q® Pro Series  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### MAVERICK X3 A-PILLAR MOUNT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Maverick X3  
2017 +  
41632  
(1) D-Series PRO,  
(2) D-SS Series PRO,  
(2) SR-M Series PRO, (2) Ignite  
Light Sold Separately

### MAVERICK X3 REVERSE MOUNT

Maverick X3  
2017 +  
41639  
(2) SR-M Series PRO  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### MAVERICK X3 ROOF MOUNT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Maverick X3  
2017 +  
41634  
(1) 40" RDS-Series PRO,  
(1) 40" E-Series PRO,  
(1) 40" SR-Series PRO  
Light Sold Separately

### MAVERICK X3 REVERSE MOUNT

Maverick X3  
2017 +  
41639  
(2) SR-M Series PRO  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**





# VEHICLE SPECIFIC

CHEVY®

WANT TO SEE  
INSTALLED  
GRILLES? VISIT  
OUR WEBSITE &  
SEARCH BY  
PART NO.



## CHEVY RDS-SERIES LED GRILLE KITS

**MODEL** Silverado® 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 41586  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



## CHEVY LED GRILLES

**MODEL** Silverado 1500 Z71  
**YEAR** 2014-2015  
**PART NO.** 40576  
**FITS** (2) 6" & (1) 10" SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** Silverado 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 40564  
**FITS** (2) D-Series Pro & (1) 10" SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** Silverado 1500  
**YEAR** 2007.5-2013  
**PART NO.** 40565  
**FITS** (2) SR-M Pro & (1) 6" SR-Series Pro  
**NOTE** Lights Sold Separately

1500  
2014-2015  
46517  
(4) SR-M Pro or (2) SR-Q Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 1500, 2500/3500  
**YEAR** 2007-2013 2007-2010  
**PART NO.** 40337  
**FITS** (4) D-Series Pro  
**NOTE** Lights Sold Separately

2500/3500  
2015-2017  
46535  
(1) DXL Pro or (2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 40338  
**FITS** (4) D-Series Pro  
**NOTE** Lights Sold Separately

Colorado  
2015-2017  
46579  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Colorado  
**YEAR** 2015-2017  
**PART NO.** 46583  
**FITS** (2) D-Series Pro  
**NOTE** D-Series SAE Set Included

Tahoe / Suburban / Avalanche  
2007-2013  
46577  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Tahoe / Suburban / Avalanche  
**YEAR** 2007-2013  
**PART NO.** 46582  
**FITS** (2) D-Series Pro  
**NOTE** D-Series SAE Set Included

Colorado  
2015-2017  
46573  
(1) 30" SR-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 46536  
**FITS** (2) 6" E or (2) SR-Series Pro  
**NOTE** Lights Sold Separately

2500/3500  
2011-2014  
40339  
(1) 20" E Pro or (1) SR-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 1500 & 2500/3500  
**YEAR** 2011-2013 2007-2010  
**PART NO.** 40336  
**FITS** (1) 20" SR-Series Pro  
**NOTE** Light Sold Separately

# VEHICLE SPECIFIC

## DODGE®

### DODGE RDS-SERIES GRILLE KITS

RAM® 1500  
2015-2017  
41585  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



RAM 1500  
2009-2012  
41593  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



RAM 2500-3500  
2013-2017  
41588  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



RAM 2500-3500  
2010-2012  
41578  
(1) 20" RDS-Series Pro  
INCLUDES LIGHT

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**RDS LIGHT BARS  
INCLUDED WITH  
RDS GRILLES**

### DODGE BUMPER MOUNTS

RAM 2500/3500  
2004-2017  
40240  
(1) 20" SR-Series Pro  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



### DODGE FOG LIGHT MOUNTS

RAM 1500 & 2500/3500  
2009-2012 2010-2017  
46510  
(4) D-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**

RAM 1500 & 2500/3500  
2002-2008 2003-2009  
46541  
(2) D-Series Pro  
Lights Sold Separately

## FORD®

### FORD RDS-SERIES GRILLE KITS

Raptor® SVT® (Without Camera)  
2009-2015  
41572  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



Raptor SVT (With Camera)  
2009-2015  
41571  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



# VEHICLE SPECIFIC

**FORD®**

**SECURITY  
HARDWARE  
INCLUDED WITH  
THIS GRILLE**



## FORD RDS-SERIES GRILLE KITS

**MODEL** Super Duty®  
**YEAR** 2011-2016  
**PART NO.** 41580  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** F-150  
**YEAR** 2015-2017  
**PART NO.** 41550  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT & SECURITY HARDWARE



**MODEL** F-150®  
**YEAR** 2013-2014  
**PART NO.** 41582  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT


## FORD GRILLE KITS




**MODEL** F-150  
**YEAR** 2009-2012  
**PART NO.** 40558  
**FITS** (2) 6" & (1) 10" SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** F-150  
**YEAR** 2004-2008  
**PART NO.** 40587  
**FITS** (1) 20" E-Series Pro  
**NOTE** Light Sold Separately

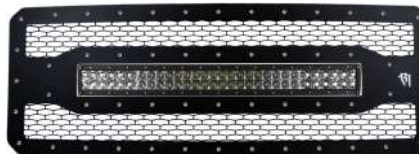

**MODEL** Super Duty  
**YEAR** 2011-2016  
**PART NO.** 40566  
**FITS** (1) 30" E-Series Pro  
**NOTE** Light Sold Separately



**MODEL** Super Duty  
**YEAR** 2008-2010  
**PART NO.** 40567-FX4 or 40577-Non FX4  
**FITS** (2) D-Series Pro & (1) 20" E-Series Pro  
**NOTE** Lights Sold Separately

Raptor  
2017-2018  
41612  
(2) 6" SR-Series Pro Driving  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Super Duty  
**YEAR** 2017-2018  
**PART NO.** 41618  
**FITS** (2) 6" SR-Series Pro Driving  
**NOTE** INCLUDES LIGHT

Raptor  
2017-2018  
41613  
(2) 6" SR-Series Pro Driving  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** F-150  
**YEAR** 2009-2012  
**PART NO.** 40558  
**FITS** (2) 6" SR-Series Pro Driving  
**NOTE** Lights Sold Separately












# VEHICLE SPECIFIC

## FORD


### FORD BUMPER MOUNTS

Raptor 2009-2015 40133 (1) 20" E-Series Pro Light Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Raptor 2009-2015 40134 (2) 4" E-Series Pro Light Sold Separately
F-150 2009-2014 46529 (1) 20" E-Series Pro Light Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Raptor 2009-2015 40236 (1) 40" E-Series Pro Light Sold Separately
Super Duty 2011-2016 46544 (1) 40" RDS Pro or (1) 40" E-Series Pro Lights Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Super Duty 2011-2015 40136 (1) 20" E or SR-Series Pro Lights Sold Separately
F-150 2006-2008 46519 (1) 20" E or SR Pro Series, or (2) 20" SR-Series Pro Lights Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Super Duty 2008-2010 46545 (1) 20" E-Series Pro/Radiance Plus, (1) 20" RDS-Series Pro, (1) 20" SR-Series Pro, or (2) 20" SR-Series Pro Lights Sold Separately

### FORD FOG LIGHT MOUNTS

Raptor 2009-2015 40235 (4) D-Series Pro Lights Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	F-150 2006-2014 46527 (2) D-Series Pro Lights Sold Separately
F-150 2015-2017 46555 (4) D-Series Pro Lights Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Super Duty 2011-2016 46504 (2) Q-Series Lights Sold Separately
Super Duty 1999-2016 46503 (2) D-Series Pro Lights Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Raptor 2017-2018 41611 (6) D-Series Pro (SAE Fog, Spot, Driving) Lights Sold Separately
Raptor 2017-2018 41610 (6) D-Series Pro (SAE Fog, Spot, Driving) LIGHTS INCLUDED	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Super Duty 2017-2018 41615 (2) D-Series SAE Fog Lights Sold Separately
Super Duty 2017-2018 41614 (2) D-Series SAE Fog LIGHTS INCLUDED	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	Super Duty 2017-2018 41617 (4) D-Series (SAE Fog, Driving) Lights Sold Separately
Super Duty 2017-2018 41616 (4) D-Series (SAE Fog, Driving) LIGHTS INCLUDED	<b>MODEL YEAR PART NO. FITS NOTE</b>			<b>MODEL YEAR PART NO. FITS NOTE</b>	

### FORD A-PILLAR MOUNT

Raptor 2017-2018 41626 (2) D-Series Pro Lights Sold Separately	<b>MODEL YEAR PART NO. FITS NOTE</b>	
--	--	---



# VEHICLE SPECIFIC

**GMC®**

## GMC RDS-SERIES GRILLE KITS



**MODEL** 1500  
**YEAR** 2016-2017  
**PART NO.** 41599  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** 1500  
**YEAR** 2011-2013  
**PART NO.** 41589  
**FITS** (1) 20" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 41584  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 41590  
**FITS** (1) 20" RDS-Series Pro  
**NOTE** INCLUDES LIGHT




**MODEL** Yukon®  
**YEAR** 2015-2017  
**PART NO.** 41592  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** Canyon®  
**YEAR** 2015-2017  
**PART NO.** 41595  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT

LASER CUT 304  
STAINLESS STEEL  
CONSTRUCTION

## GMC GRILLE KITS



**MODEL** 1500  
**YEAR** 2014-2015  
**PART NO.** 40573  
**FITS** (2) D-Series Pro & (1) 20" E-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** 1500  
**YEAR** 2011-2013  
**PART NO.** 40568  
**FITS** (2) D-Series Pro & (1) 10" E-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 40569  
**FITS** (2) D-Series Pro & (1) 10" E-Series Pro  
**NOTE** Lights Sold Separately

# VEHICLE SPECIFIC

## GMC

### GMC BUMPER MOUNTS

1500 & 2500/3500  
2011-2013 2007-2010  
46505  
(1) 20" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 46506  
**FITS** (1) 20" E or SR-Series Pro or  
(2) 20" SR-Series Pro  
**NOTE** Lights Sold Separately

### GMC FOG LIGHT BRACKETS

1500  
2014-2015  
46511  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 1500 & 2500/3500  
**YEAR** 2008-2013 2008-2010  
**PART NO.** 46507  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

1500 & 2500/3500  
2007-2013 2007-2010  
40338  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 46543  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

2500/3500  
2011-2014  
46508  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



## HONDA®

### HONDA HEADLIGHT MOUNT

CRF®  
2004-2016  
46516  
(1) SR-Q Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



## HYUNDAI®

### BUMPER MOUNT

Tucson®  
2016-2017  
46557  
(2) 6" E or SR-Series Pro  
Light Sold Separately


**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



# VEHICLE SPECIFIC

**JEEP®**

## JEEP GRILLE KITS

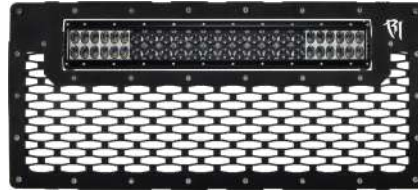

**MODEL** Wrangler® JK  
**YEAR** 2007-2017  
**PART NO.** 40591  
**FITS** (1) 20" E-Series Pro  
**NOTE** Light Sold Separately

## JEEP HOOD MOUNTS

Wrangler JK  
2007-2015  
40332  
(1) 10" E or (1) 10" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40333  
**FITS** (1) 20" E or (1) 20" SR-Series Pro  
**NOTE** Light Sold Separately

## JEEP WINDSHIELD MOUNTS

Wrangler JK  
2007-2017  
40131  
(1) 50" E or (1) 50" SR-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler TJ  
**YEAR** 1997-2006  
**PART NO.** 40137  
**FITS** (1) 50" E or (1) 50" SR-Series Pro  
**NOTE** Lights Sold Separately

## JEEP A-PILLAR MOUNTS

Wrangler JK  
2007-2017  
(single) 40331  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40139 (single swivel)  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

Wrangler JK  
2007-2017  
(pair) 40335  
(4) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler  
**YEAR** 2007-2017  
**PART NO.** 46502  
**FITS** (2) Q-Series  
**NOTE** Lights Sold Separately



**MODEL** Wrangler JK  
**YEAR** 2007-2018  
**PART NO.** 41647  
**FITS** (2) Reflect  
**NOTE** Lights Sold Separately

## JEEP TAIL LIGHT MOUNTS

Wrangler JK  
2007-2017  
(Driver Side) 40311  
(1) SR-M Pro or (1) SR-Q Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40322 (Passenger Side)  
**FITS** (1) SR-M Pro or (1) SR-Q Series Pro  
**NOTE** Lights Sold Separately

## JEEP FOG LIGHT MOUNT



**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40138  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

## JEEP DOOR MOUNT



**MODEL** Wrangler JK  
**YEAR** 2007-2018  
**PART NO.** 41646  
**FITS** (2) Reflect  
**NOTE** Lights Sold Separately

# VEHICLE SPECIFIC

## KAWASAKI®

### KAWASAKI GRILLE MOUNT

Teryx®  
2010-2015  
46515  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



## KTM®

### KTM HEADLIGHT MOUNTS

KTM  
2013.5-2016  
(Top or Bottom) 46514  
TOP (2)SR-M Pro BOTTOM (1)SR-Q Pro  
or (2)SR-Q Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

KTM  
2007-2013  
46513  
TOP(1) SR-Q Pro BOTTOM (1) SR-M Pro  
Lights Sold Separately

## NISSAN®

### NISSAN GRILLE KITS

Titan® (Without Camera)  
2016-2017  
40549  
20" E-Series Pro or Radiance Plus  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Frontier  
2009-2016  
40598  
(1) 10" E-Series Pro  
Light Sold Separately

Titan®(With Camera)  
2016-2017  
40548  
20" E-Series Pro or Radiance Plus  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Titan® & Armada®  
2004-2015 2004-2007  
40583  
(1) 20" E-Series Pro  
Light Sold Separately

### NISSAN FOG MOUNT

Titan  
2016-2017  
46580  
(2) D-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Titan  
2016-2017  
46585  
(2) SAE D-Series Pro  
INCLUDES LIGHTS

Titan  
2004-2015  
46561  
(2) D-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Frontier  
2009-2016  
46584  
(2) D-Series Pro  
INCLUDES LIGHTS

### NISSAN BUMPER MOUNT

Titan  
2016-2017  
46581  
(1) 20" E Pro or SR Pro or Radiance Plus  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**





# VEHICLE SPECIFIC

**POLARIS®**

## POLARIS GRILLE KITS

RZR® XP1000  
2014-2016  
40574  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR XP1000  
2012-2013  
40557  
(1) 10" SR-Series Pro  
Light Sold Separately

Ranger®  
2012-2013  
40340  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** Sportsman 850  
2009-2014  
46553  
(1) 6" SR-Series Pro  
Light Sold Separately

RZR Turbo  
2017 +  
41640  
(1) 10" SR-Series PRO  
INCLUDES LIGHT

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR Turbo  
2017 +  
41641  
(1) 10" SR-Series PRO  
Light Sold Separately

## RZR 170 GRILLE & A-PILLARS



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR 170  
2009-2017  
46546  
(2) SR-M Pro or (2) Rigid Ignite™  
Light Sold Separately

## POLARIS A-PILLAR MOUNTS

RZR XP1000  
2014-2016  
46526  
(2) PAR46 or (2) D-XL Pro or  
(2) D-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR XP1000  
2014-2016  
46528 (Double)  
(4) D-Series Pro  
Lights Sold Separately

## POLARIS B-PILLAR MOUNTS



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR XP1000 (2 Seater Only)  
2014-2016  
46533  
(2) SR-M or (2) SR-Q  
or (2) D-Series Pro  
Lights Sold Separately

## POLARIS ROOF MOUNTS

RZR XP1000  
2014-2015  
46532  
(1) 30" E or (1) 30" SR-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR XP1000  
2014-2015  
46531  
(1) 30" RDS-Series Pro  
Light Sold Separately



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR Turbo  
2017 +  
41653  
(1) 30" ADAPT  
Light Sold Separately

## POLARIS MIRROR MOUNTS



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** RZR TURBO  
2017 +  
41648  
(2) REFLECT  
Light Sold Separately

# VEHICLE SPECIFIC

## POLARIS

### POLARIS FENDER KIT

RZR XP900 / XP1000  
2014-2016  
46562  
(2) SR-M Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### POLARIS DOME LIGHT KIT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

RZR XP1000  
2014-2016  
46522  
(2) A-Series  
Kit Sold Separately



### POLARIS REVERSE LIGHT KIT

RZR XP1000  
2014-2016  
46534  
(2) SR-M or (2) SR-Q Series Pro  
Kit Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### HOOD SCOOP LIGHT KIT

RZR Turbo  
2017 +  
41642  
(1) SR-Series PRO  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

RZR Turbo  
2017 +  
41643  
(1) 10" SR-Series PRO  
Light Sold Separately

### POLARIS LIGHT MOUNT KITS

RZR XP1000  
2014-2016  
46539  
(4) A-Series  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

RZR XP1000  
2014-2016  
46554  
(4) D-Series Pro  
Lights Sold Separately

RZR XP1000  
2014-2016  
465603  
(4) D-Series Pro  
INCLUDES LIGHTS

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Sportsman 850  
2009-2014  
46552  
(2) D-Series Pro or (1) 6" E-Series Pro  
Kit Sold Separately

## SUBARU®

### WRX/STI BUMPER MOUNT KIT

WRX/STI  
2010-2014  
46524  
(2) 6" E-Series Pro  
(2) 6" SAE Compliant  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**BUMPER  
MOUNT KIT  
INCLUDES  
LIGHTS**


# VEHICLE SPECIFIC

TOYOTA®

## TOYOTA GRILLE KITS

FJ Cruiser®  
2005-2014  
(2 Piece) 40551  
(2) D-Series Pro & (2) 6" SR-Series Pro  
Lights Sold Separately


**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**  
Tacoma®  
2012-2015  
40552  
(1) 20" SR-Series Pro  
Light Sold Separately

FJ Cruiser  
2005-2014  
(Upper Piece) 40560  
(2) D-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**  
Tacoma  
2005-2011  
40553  
(1) 10" SR-Series Pro  
Light Sold Separately

FJ Cruiser  
2005-2014  
(Lower Piece) 40561  
(2) 6" SR-Series Pro  
Lights Sold Separately


**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**  
Tacoma  
2005-2011  
40575  
(1) 20" SR-Series Pro  
Light Sold Separately

4Runner®  
2014-2016  
40596  
(1) 20" E-Series Pro  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**  
Tundra®  
2014-2017  
40570  
(2) D-Series Pro &  
(1) 20" E-Series Pro  
Lights Sold Separately

4Runner  
2010-2013  
(2 Piece) 40556  
(1) 20" SR-Series Pro &  
(2) D-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**  
Tundra  
2010-2013  
40554  
(1) 30" SR-Series Pro  
Light Sold Separately

4Runner  
2010-2013  
(Upper Piece) 40562  
(1) 20" SR-Series Pro  
Light Sold Separately


**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**  
Tundra  
2010-2013  
40555  
(2) 6" SR-Series Pro &  
(1) 10" SR-Series Pro  
Lights Sold Separately

4Runner  
2010-2013  
(Lower Piece) 40563  
(2) D-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



Hilux®  
2012-2015  
40594  
(1) 20" SR-Series Pro  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**LASER CUT 304  
STAINLESS STEEL  
CONSTRUCTION**

Tacoma®  
2016-2017  
40597  
(1) 20" E-Series Pro or  
Radiance Plus  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**










# VEHICLE SPECIFIC

## TOYOTA

### TOYOTA BUMPER MOUNTS

Hilux 2012-2015 46538 (1) 20" E or (1) 20" SR-Series Pro Light Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>			<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>	Tundra 2014-2017 46512 (1) 30" SR-Series Pro Light Sold Separately
Tacoma 2016-2017 46565 (1) 30" SR-Series Pro Light Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>			<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>	Tacoma 2016-2017 46568 (1) 30" SR-Series Pro INCLUDES LIGHT
Tacoma 2005-2015 40156 (1) 30" SR-Series Pro Light Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>				

### TOYOTA FOG LIGHT MOUNTS

Tacoma 2016-2017 46566 (2) D-Series Pro Lights Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>			<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>	Tacoma 2016-2017 46567 (2) D-Series Pro INCLUDES LIGHT
Tacoma 2012-2015 46509 (2) SR-M Series Pro Lights Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>			<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>	Tacoma & Tundra 2005-2011 2007-2013 46530 (2) D-Series Pro Lights Sold Separately
Tundra 2014-2017 46520 (2) D-Series Pro Lights Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>			<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>	4Runner 2014-2016 46540 (2) D-Series Pro Lights Sold Separately
Hilux 2012-2015 46525 (2) D-Series Pro Lights Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>				

### TOYOTA ROOF RACK MOUNTS

FJ Cruiser 2005-2014 40132 (1) 20" E-Series Pro & (2) 10" E-Series Pro Lights Sold Separately	<b>MODEL</b> <b>YEAR</b> <b>PART NO.</b> <b>FITS</b> <b>NOTE</b>	
--	--	---



# VEHICLE SPECIFIC

YAMAHA®

## YXZ SHOCK MOUNT



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46576  
**FITS** (1) 10" SR-Series Pro  
**NOTE** Light Sold Separately

## YXZ A-PILLAR MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46569  
**FITS** (2) D Pro/DXL Pro/SR-M Pro/  
SR-Q Pro/PAR46/Rigid Ignite  
**NOTE** Light Sold Separately

## YXZ B-PILLAR MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46570  
**FITS** (2) D Pro/DXL Pro/SR-M Pro/SR-Q Pro/  
PAR46/Rigid Ignite  
**NOTE** Light Sold Separately

## YXZ ROOF MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46575  
**FITS** (1) 38" E or SR-Series Pro  
**NOTE** Light Sold Separately

## YXZ ROCK LIGHT MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46571  
**FITS** (4) A-Series  
**NOTE** Light Sold Separately

## YXZ DOME LIGHT MOUNT



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46572  
**FITS** (1) A-Series  
**NOTE** Light Sold Separately

ALL GRILLES  
AND MOUNTS ARE  
MADE IN THE  
USA

# SPECIALTY MOUNTS

## FIRE TRUCK

### BROW MOUNTS

(Black) 40001  
Up to (2) SR-Series  
Lights Sold Separately

**PART NO.**  
**FITS**  
**NOTE**



**PART NO.** 40002 (White)  
**FITS** Up to (2) SR-Series  
**NOTE** Lights Sold Separately

RIGID's Brow Mounts provide a straightforward high-output lighting solution to any fire apparatus. Engineered to fit up to two SR Series Light Bars or one E-Series Light Bar, the Brow Mount tabs utilize a through-bolt system for a simple and versatile installation.

### POLE MOUNT

40095  
Fits All Light Series And Cradles  
Lights Sold Separately

**PART NO.**  
**FITS**  
**NOTE**



Pole Mounts provide a highly portable way to light up any scene. This pole mount is engineered to fit two Q-Series, Scene Lights or one 10" E-Series Light bar. The mount is easily adjustable, enabling compact, powerful lighting to be focused anywhere needed.



"THIS IS HOW I  
LOOK WITH TWO  
Q-SERIES."

- POLE MOUNT

# SPECIALTY MOUNTS

## RI ACCESSORIES BY RAM®

RAM stands for "Round A-Mount" and features a unique, patented ball and socket design that provides a full 180° rotation of your mounted light. The ball is made from an elastomeric rubber, gripping the socket while also providing shock and vibration dampening. These mounts are compatible with Rigid Industries SR-M, SR-Q and D-Series LED lights. With RAM Mounts, the only limitation for lighting options is your imagination.

40060  
Bolt Down  
6"  
6.25 x 2  
Lights Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40061  
Pole Mount (0.5" - 1.25")  
3.7"  
1 x 1  
Light Sold Separately

40069  
Bolt Down  
3.7"  
1 x 1  
Light Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40063  
Suction Cup  
3.7"  
6.25 x 2  
Lights Sold Separately

40071  
Bolt Down  
2.4"  
1 x 1  
Light Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40064  
Suction Cup  
3.7"  
1 x 1  
Light Sold Separately

40073  
Bolt Down  
6"  
1 x 1  
Light Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40065  
Suction Cup  
2.4"  
6.25 x 2  
Lights Sold Separately

40074  
Bolt Down  
2.4"  
6.25 x 2  
Lights Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40066  
Suction Cup  
2.4"  
1 x 1  
Light Sold Separately

40075  
Bolt Down  
3.7"  
6.25 x 2  
Lights Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40067  
Suction Cup  
6"  
6.25 x 2  
Lights Sold Separately

40062  
(0.5" - 1.25") Pole Mount  
2.4"  
1 x 1  
Light Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40068  
Suction Cup  
6"  
1 x 1  
Light Sold Separately

40070  
(3") Pole Mount  
3.7"  
1 x 1  
Light Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**

40094  
Double Suction Cup  
n/a  
6.25 x 2  
Lights Sold Separately

40072  
(3") Pole Mount  
2.4"  
1 x 1  
Light Sold Separately

**PART NO.**  
**MOUNT**  
**ARM**  
**PLATE**  
**NOTE**



## MOUNTING OPTIONS

### FLUSH MOUNT BUCKETS

Gasket provided for weather proofing.  
15° vertical direction adjustments.

PART NO.	FITS
48301B	A-Series - Black
48301W	A-Series - White
40010B	4" E-Series Pro - Black
40010W	4" E-Series Pro - White
40011B	6" E-Series Pro - Black
40011W	6" E-Series Pro - White
40012B	10" E-Series Pro - Black
40012W	10" E-Series Pro - White
40013B	6" SR-Series Pro - Black
40013W	6" SR-Series Pro - White
40014B	10" SR-Series Pro - Black
40014W	10" SR-Series Pro - White
40015B	Q-Series - Black
40015W	Q-Series - White

### SINGLE BAR CLAMP

Compatible with D, SR-Q & SR-M Series Pro

SIZE	A-PILLAR	HORIZ	VERT
.875"	40830	40840	40850
1.0"	41130	41040	41050
1.125"	41230	41240	41250
1.25"	42530	42540	42550
1.50"	45030	45040	45050
1.625"	46230	46240	46250
1.70"	47030	47040	47050
1.75"	47530	47540	47550
1.875"	48530	48540	48550
2"	42030	42040	42050
2.25"	42230	42240	42250
2.375"	42330	42340	42350
2.5"	45230	45240	45250
2.625"	42630	42640	42650
2.75"	42730	42740	42750
2.875"	42830	42840	42850
3"	43030	43040	43050
3.25"	43230	43240	43250

A-Pillar

Horizontal

Vertical

### ANGLED FLUSH MOUNT KIT

PART NO.	FITS	ANGLE DIRECTION
49000	D-Series Pro	Down
49010	D-Series Pro	Side
49002	SR-Q Pro	Down
49013	SR-Q Pro	Side
49001	SR-M Pro	Down
49011	SR-M Pro	Side

### A-SERIES MOUNTING KITS

PART NO.	
40007	Angled Mount
40008	Radius Mount

### LIGHT BAR CLAMPS

Compatible with the E, SR & RDS-Series Pro  
Two Per Set  
Hardware Included

SIZE	E/SR PRO	RDS PRO
.875"	40820	40821
1.0"	41020	41021
1.125"	41120	41121
1.25"	42520	42521
1.50"	45020	45021
1.625"	46220	46221
1.70"	47020	47021
1.75"	47520	47521
1.875"	48720	48721
2"	42020	42021
2.25"	42220	42221
2.375"	42320	42321
2.5"	45220	45221
2.625"	42620	42621
2.75"	42720	42721
2.875"	42820	42821
3"	43020	43021
3.25"	43220	43221

### LICENSE PLATE BRACKET

Mountable with compact LED lights



PART NO.  
40016

### EXTENDED D-SERIES BRACKET

PART NO.  
46537



### CHASE LICENSE PLATE MOUNT



PART NO.  
41650 | Includes CHASE Light

### CHASE SPARE TIRE MOUNT



PART NO.  
41651 | Spare Tire Mount  
Can be used with 41650

### CRADLES

Compatible with E-Series Pro & SR-Series Pro  
Hardware included

SIZE	E-SERIES PRO (BLACK)	E-SERIES PRO (WHITE)	SR-SERIES PRO (BLACK)
4"	40410	40411	-
6"	40610	40611	40690
10"	41010	41011	41090
20"	42010	-	42090
30"	43010	-	43090
40"	44010	-	44090



41010  
10" E-Series Pro



## MOUNTING OPTIONS

### WELD ON TABS

Compatible with E-Series, SR-Series Pro & REFLECT



40291	E-Series & SR-Series PRO	Flat (Pair)
40292	E-Series & SR-Series PRO	Radius (Pair)
41645	REFLECT	Flat (Pair) REFLECT Flat Mount Included

### REFLECT FLAT MOUNT BASE KIT

Compatible with Reflect



PART NO.	
40291	Flat (Pair)

## LIGHT COVERS

### SINGLE LIGHT COVERS

COLOR	E PRO / RDS PRO / RADIANCE PLUS 10"	RDS PRO 11"	E PRO 4"	E PRO 6"	SR PRO 6"	SR PRO 10"
Black	105743	105523	104913	106913	105843	190913
Clear	105753	105533	104923	106923	105883	190923
Amber	105763	105543	104933	106933	105863	190933
Blue	105773	105553	104943	106943	105873	190943
Red	105783	105563	104953	106953	105903	190953
White	105793	105573	104963	106963	105853	190963
Green	105803	105583	104973	106973	105893	190973
Smoke	105813	105593	104983	106983	105913	190983

COLOR	DXL PRO	D PRO	D-SS PRO	SR-Q PRO	SR-M PRO	Q	R 46
Black	321913	201913	321813	311913	301913	10391	63391
Clear	321923	201923	321823	311923	301923	10392	63392
Amber	321933	201933	321833	311933	301933	10393	63393
Blue	321943	201943	321843	311943	301943	10394	63394
Red	321953	201953	321853	311953	301953	10395	63395
White	321963	201963	321863	311963	301963	10396	63396
Green	321973	201973	321873	311973	301973	10397	63397
Smoke	321983	201983	321883	311983	301983	10398	63398

BLACK & WHITE  
ARE OPAQUE. CLEAR,  
AMBER, BLUE, RED,  
WHITE, GREEN & SMOKE  
ARE TRANSLUCENT

### LIGHT COVER KITS

LIGHT SIZE	COLOR	PART NO.	INCLUDED
20" SR-Series Pro	Black	192913	(2) 10" Covers
30" SR-Series Pro	Black	193913	(3) 10" Covers
40" SR-Series Pro	Black	194913	(4) 10" Covers
50" SR-Series Pro	Black	195913	(5) 10" Covers
20" E-Series Pro	Black	120913	(2) 10" Covers
30" E-Series Pro	Black	130913	(3) 10" Covers
40" E-Series Pro	Black	140913	(4) 10" Covers
50" E-Series Pro	Black	150913	(5) 10" Covers
20" RDS-Series Pro	Black	105703	(2) 10" Covers
30" RDS-Series Pro	Black	105713	(3) 10" Covers
40" RDS-Series Pro	Black	105723	(4) 10" Covers
50" RDS-Series Pro	Black	105733	(5) 10" Covers
54" RDS-Series Pro	Black	105613	(5) 11" Covers
54" RDS-Series Pro	Clear	105623	(5) 11" Covers
54" RDS-Series Pro	Amber	105633	(5) 11" Covers
54" RDS-Series Pro	Blue	105643	(5) 11" Covers
54" RDS-Series Pro	Red	105653	(5) 11" Covers
54" RDS-Series Pro	White	105663	(5) 11" Covers
54" RDS-Series Pro	Green	105673	(5) 11" Covers
54" RDS-Series Pro	Smoke	105683	(5) 11" Covers



Clear  
10" E or RDS  
Series Pro



Black  
DXL Pro



Amber  
SR-M Series Pro



Red  
D-SS Pro



Blue  
SR-Q Series Pro



White  
10" SR-Series Pro

## WIRING

### WIRING HARNESS

#### PART NO.

#### FITS

40199	SR-M Pro or SR-Q Pro
40195	D-Series Pro - Flood (Pair)
40196	D-Series Pro - Driving (Pair)
40192	Back Up Light Kit Harness D-Series Pro, Dually XL Pro, SR-Q Pro or SR-M Pro
40194	D-Series Pro (Single), 4" E-Series Pro, or 6" SR-Series Pro
40193	10"- 50" SR-Series Pro or 10"- 30" E-Series Pro
40190	Hi Power 40"- 50" E-Series Pro or 20"- 30" RDS-Series Pro
40200	Radiance Plus Light Bars 10"- 50"
40300	Radiance Pods



40196

### IN-LINE SWITCH

#### PART NO.

#### LENGTH

40051	24"
-------	-----



### 12V CIGARETTE LIGHTER ADAPTER

Length: 15'

#### PART NO.

#### FITS

40009	D-Series Pro (Pair), SR-M Pro (Pair), SR-Q Pro (Pair)
-------	---



### PENDANT SWITCH KIT

Length: 15'

#### PART NO.

#### LENGTH

40052	24"
-------	-----



### HARNESS EXTENSION

Length: 1 Meter

#### PART NO.

#### FITS

40197	30" or smaller lights
40198	40" or larger lights



40197

### ROCKER SWITCHES

Replacement for 12V and 24V DC systems

#### PART NO.

40191	2 Position Replacement Switch
40181	3 Position May be used with Dual Function LED Lights & Back Up Light Kits



40191

### LED FLASHER

Works with up to 10 inch light  
Available in 7 patterns

#### PART NO.

40312	3 amp - 12 Volt
40324	3 amp - 24 Volt
40612	6 amp - 12 Volt



40312

### ANTI FLICKER ADAPTOR

PWM Adaptor - H13 to H4

#### PART NO.

#### FITS


55006	2007-Up Jeep JK models
-------	------------------------

H13 to H4

#### PART NO.

#### FITS

55007	2007-Up Jeep JK models
-------	------------------------



55006

### RELAY

Replacement for 12V and 24V DC systems

#### PART NO.

49012	12V Relay
49024	24V Relay



49024

## HOLSTERS

### SMALL RI-SERIES FLASHLIGHT HOLSTER

Flashlight Sold Separately



RI-600  
Shown

#### PART NO.

#### FITS

30181	RI-600
-------	--------

### LARGE RI-SERIES FLASHLIGHT HOLSTER

Flashlights Sold Separately



RI-1100  
Shown

RI-800  
Shown

#### PART NO.

#### FITS

30182	RI-800
	RI-1100

SECURITY NUT KITS

PART NO.	FITS
40282	D-Series Pro
40283	D-Series Pro (Heavy Duty)
40284	E-Series Pro SR-Series Pro
40286	SR-M Series Pro SR-Q Series Pro
40287	Q-Series
40288	A-Series
40289	Flush Mounts
40290	RDS-Series Pro

RIGID: NOW  
MAKING A  
THIEVES JOB  
HARDER



40287

POP DISPLAYS

COUNTER TOP POP DISPLAYS

PART NO.	INCLUDES
779912	(2) D-Series Pro Lights (1) 6" E-Series Pro Light



PART NO.	INCLUDES
77991	(2) D-Series Pro (1) E-Series Pro



PART NO.	INCLUDES
77992	(2) D-Series Pro (White Housing) (1) E-Series Pro (White Housing)



PART NO.	INCLUDES
77995	(4) SR-M Series Pro

SAE & SCENE LIGHT COUNTER TOP POP DISPLAY

PART NO.	INCLUDES
779913	(1) 2x2 Heavy Duty DC Scene Light (1) SAE Fog Light D-Series Pro (1) 6" SAE Auxiliary E-Series Pro



RIGID INDUSTRIES RADIANCE BACK-LIT DISPLAY

PART NO.	INCLUDES
220063	(1) 20" Radiance Display Bar Light with Automatic Back-Lit Color Changing



# THANK YOU RIGID NATION







**Warranty Information:**  
[www.rigidindustries.com/warranty](http://www.rigidindustries.com/warranty)

**Sales/Customer Service:**  
**Hours of Operation: 8:00 am - 5:00 pm MST**  
**Toll Free: 855-760-5337**

**Copyright April 2018**  
**Rigid Industries LED Lighting**  
**779 N. Colorado St, Gilbert, Arizona 85233**

[www.rigidindustries.com](http://www.rigidindustries.com)  
**#82541-B**